

Service  
Service  
Service



- 190VW9FB/97(1) 190VW9FB/97(2)
- 190VW9FB/94(1) 190VW9FB/94(2)
- 190VW9FB/62(1) 190VW9FB/27(2)
- 190VW9FB/27(1) 190VW9FB/75(2)
- 190VW9FB/05(1) 190VW9FB/93(2)
- 190VW9FB/00(1) 190VW9FB/62(2)
- 190VW9FB/75(1) 190VW9FB/00(2)
- 190VW9FB/93(1) 190VW9FB/05(2)
- 190VW9FB/78(1)



# Service Manual

Description	Page	Description	Page
Table Of Contents.....	1	6.1 Main Board.....	21
Revision List.....	2	6.2 Power Board.....	26
Important Safety Notice.....	3	6.3 Key Board.....	28
1. Monitor Specifications.....	4	7. PCB Layout.....	29
2. LCD Monitor Description.....	6	7.1 Main Board.....	29
3. Operation instructions.....	7	7.2 Power Board.....	31
3.1 General Instructions.....	7	7.3 Key Board.....	33
3.2 Control buttons.....	7	8. Wiring Diagram.....	34
3.3 Adjusting the Picture.....	9	9. Scalar Board Overview.....	35
3.4 Connecting to the PC.....	11	10. Mechanical Instructions.....	36
4. Input/Output Specification.....	12	11. Trouble shooting.....	41
4.1 Input Signal Connector.....	12	12. Repair Flow Chart.....	43
4.2 Factory Preset Display Modes.....	12	13. ISP Instructions.....	49
4.3 Pixel Defect Policy.....	13	14. DDC Instructions.....	57
4.4 Failure Mode Of Panel.....	16	15. White Balance, Luminance Adjustment.....	65
5. Block Diagram.....	17	16. Monitor Exploded View.....	67
5.1 Software Flow Chart.....	17	17. Recommended & Spare Parts List.....	68
5.2 Electrical Block Diagram.....	19	18. Different Parts List.....	72
6. Schematic Diagram.....	21	19. General Product Specification.....	76

**SAFETY NOTICE**

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

REFER TO BACK COVER FOR IMPORTANT SAFETY GUIDELINES



## Important Safety Notice

Proper service and repair is important to the safe, reliable operation of all Philips Company Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

Hereafter throughout this manual, Philips Company will be referred to as Philips.

### WARNING

Use of substitute replacement parts, which do not have the same, specified safety characteristics may create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design.

Servicer assumes all liability.

### FOR PRODUCTS CONTAINING LASER:

DANGER-Invisible laser radiation when open. AVOID DIRECT EXPOSURE TO BEAM.

CAUTION-Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION -The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body is grounded through wristband.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel becomes dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

## 1. Monitor Specifications

LCD PANEL	
• Type	TFT LCD
• Screen size	19" visual
• Pixel Pitch	0.285 x 0.285 mm
• LCD Panel type	1440 x 900 pixels R.G.B. vertical stripe Anti-glare polarizer, hard coated
• Effective viewing area	410.4 x 256.5 mm
• Display Colors	16.7m
SCANNING	
• Vertical refresh rate	56 Hz-76 Hz
• Horizontal Frequency	30 kHz - 83 kHz
VIDEO	
• Video dot rate	165 MHz
• Input impedance	
- Video	75 ohm
- Sync	2.2K ohm
• Input signal levels	0.7 Vpp
• Sync input signal	Separate sync Composite sync Sync on green
• Sync polarities	Positive and negative

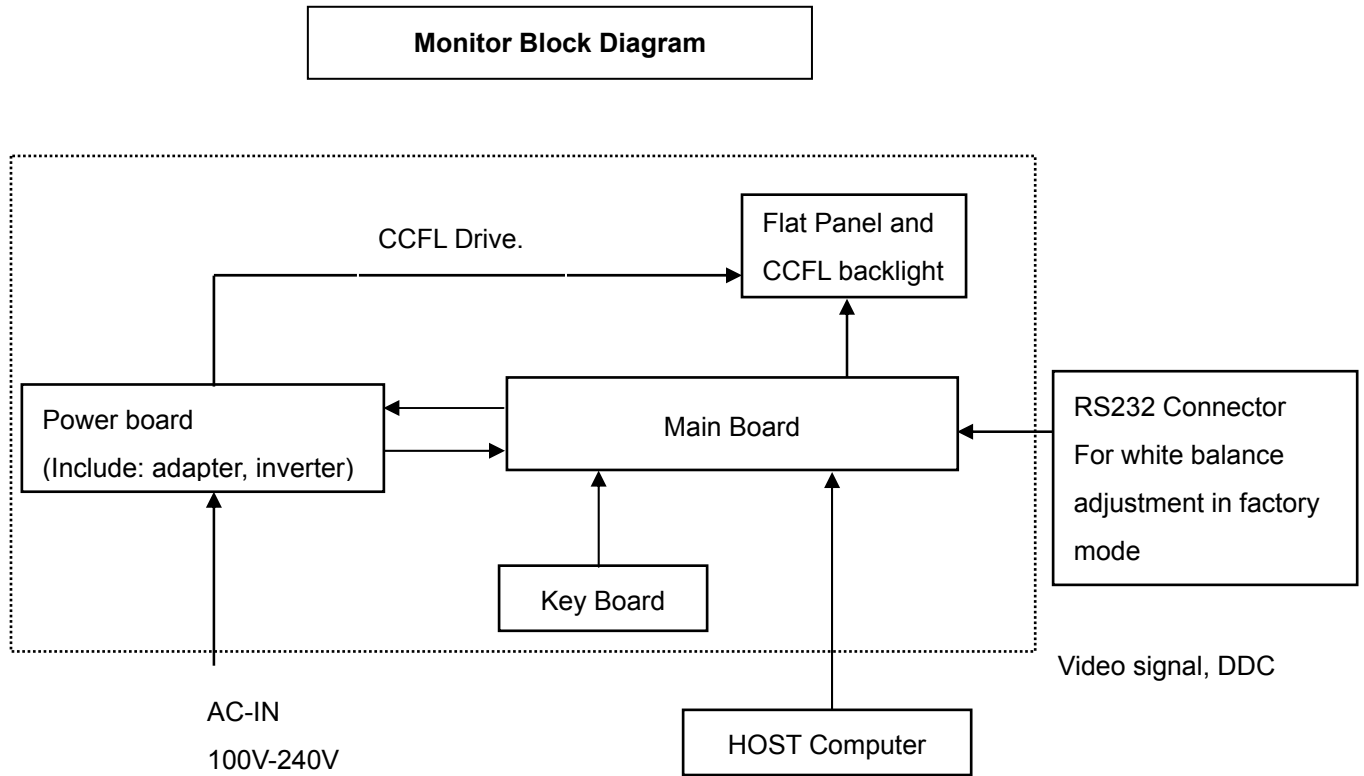


• Tilt	-5° ~ 20°
• Power supply	100 ~ 240 VAC, 50/60 Hz
• Power consumption	<35 W* (typ.)
• Temperature	0° C to 40° C (operating) -20° C to 60° C (storage)
• Relative humidity	20% to 80%
• System MTBF	50K hours (CCFL 40K hours)
• Cabinet color	190VW9FB: Black

## 2. LCD Monitor Description

The LCD monitor will contain a main board, a power board and a key board which house the flat panel control logic, brightness control logic and DDC.

The power board will provide AC to DC Inverter voltage to drive the backlight of panel and the main board chips each voltage.



## 3. Operating Instructions

### 3.1 General Instructions

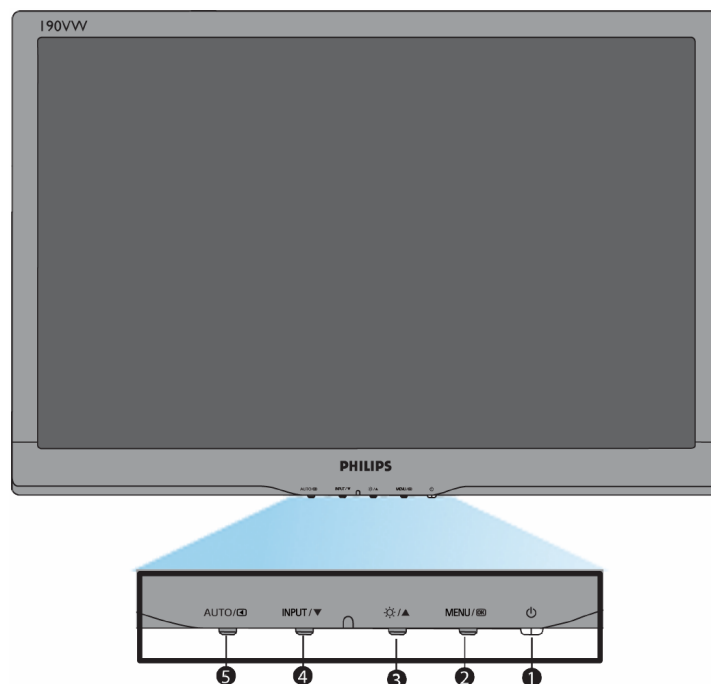
Press the power button to turn the monitor on or off. The other control buttons are located at the front of the panel of the monitor.






By changing these settings, the picture can be adjusted to your personal preferences.

- The power cord should be connected.
- Connect the video cable from the monitor to the video card.
- Press the power button to turn on the monitor, the power indicator will light up.


### 3.2 Control Buttons

#### Front View



- |   |                                                                                     |                                                                                                                             |
|---|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| 1 |  | To switch monitor's power On and Off                                                                                        |
| 2 |  | To access OSD menu                                                                                                          |
| 3 |  | To adjust brightness of the display                                                                                         |
| 4 |  | To change the signal input source.                                                                                          |
| 5 |  | Automatically adjust the horizontal position, vertical position, phase and clock settings.<br>Return to previous OSD level. |

## Rear View

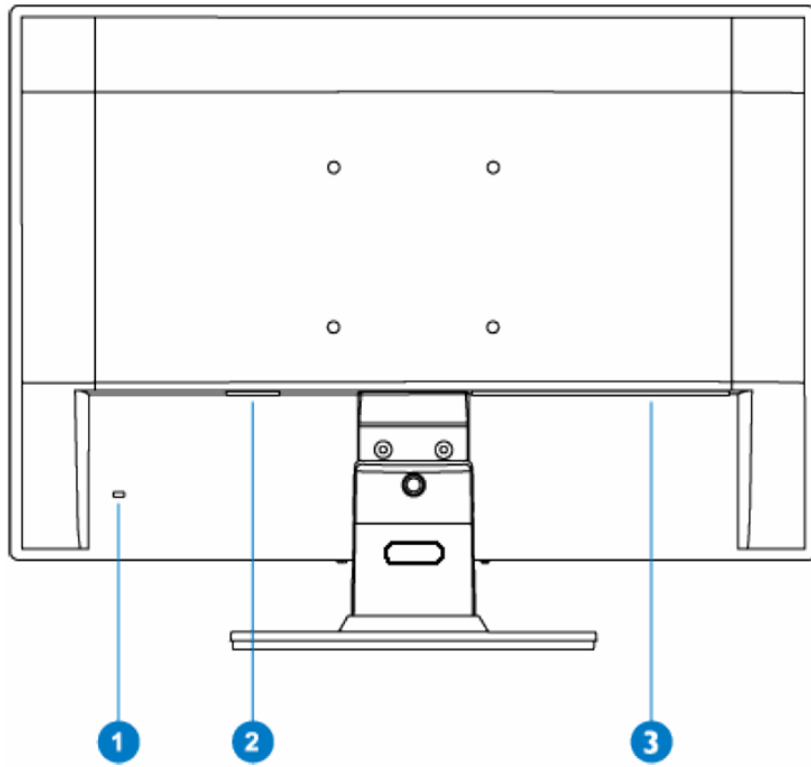


- 1 Kensington anti-thief lock
- 2 AC power input
- 3 VGA input

### 3.3 Adjusting the Picture
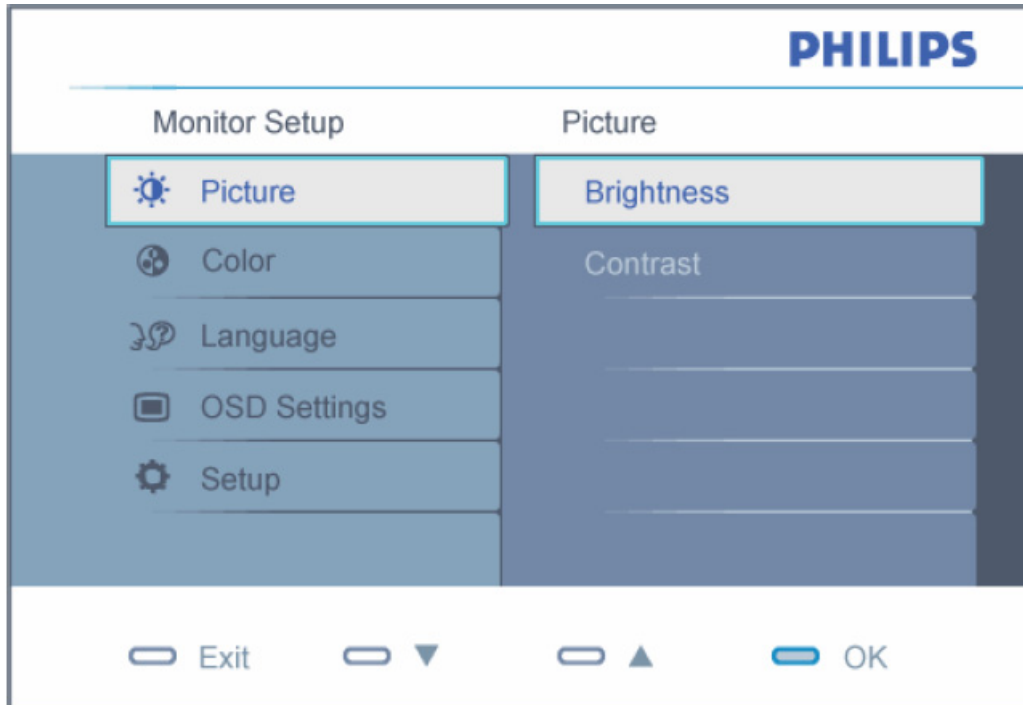
#### Description of the On Screen Display

When you press the **MENU/OSD** button on the front control of your monitor, the On-Screen Display (OSD) Main Controls window will pop up and you can then start making adjustments to your monitor's various features. Use the **▲▼** keys to make your adjustments.




#### To Lock/Unlock OSD function (User Mode)

The OSD function can be locked by pressing "MENU" button for more than 10 seconds.

Locked OSD function can be released by pressing "MENU" button for more than 10 seconds again.


### The OSD Tree

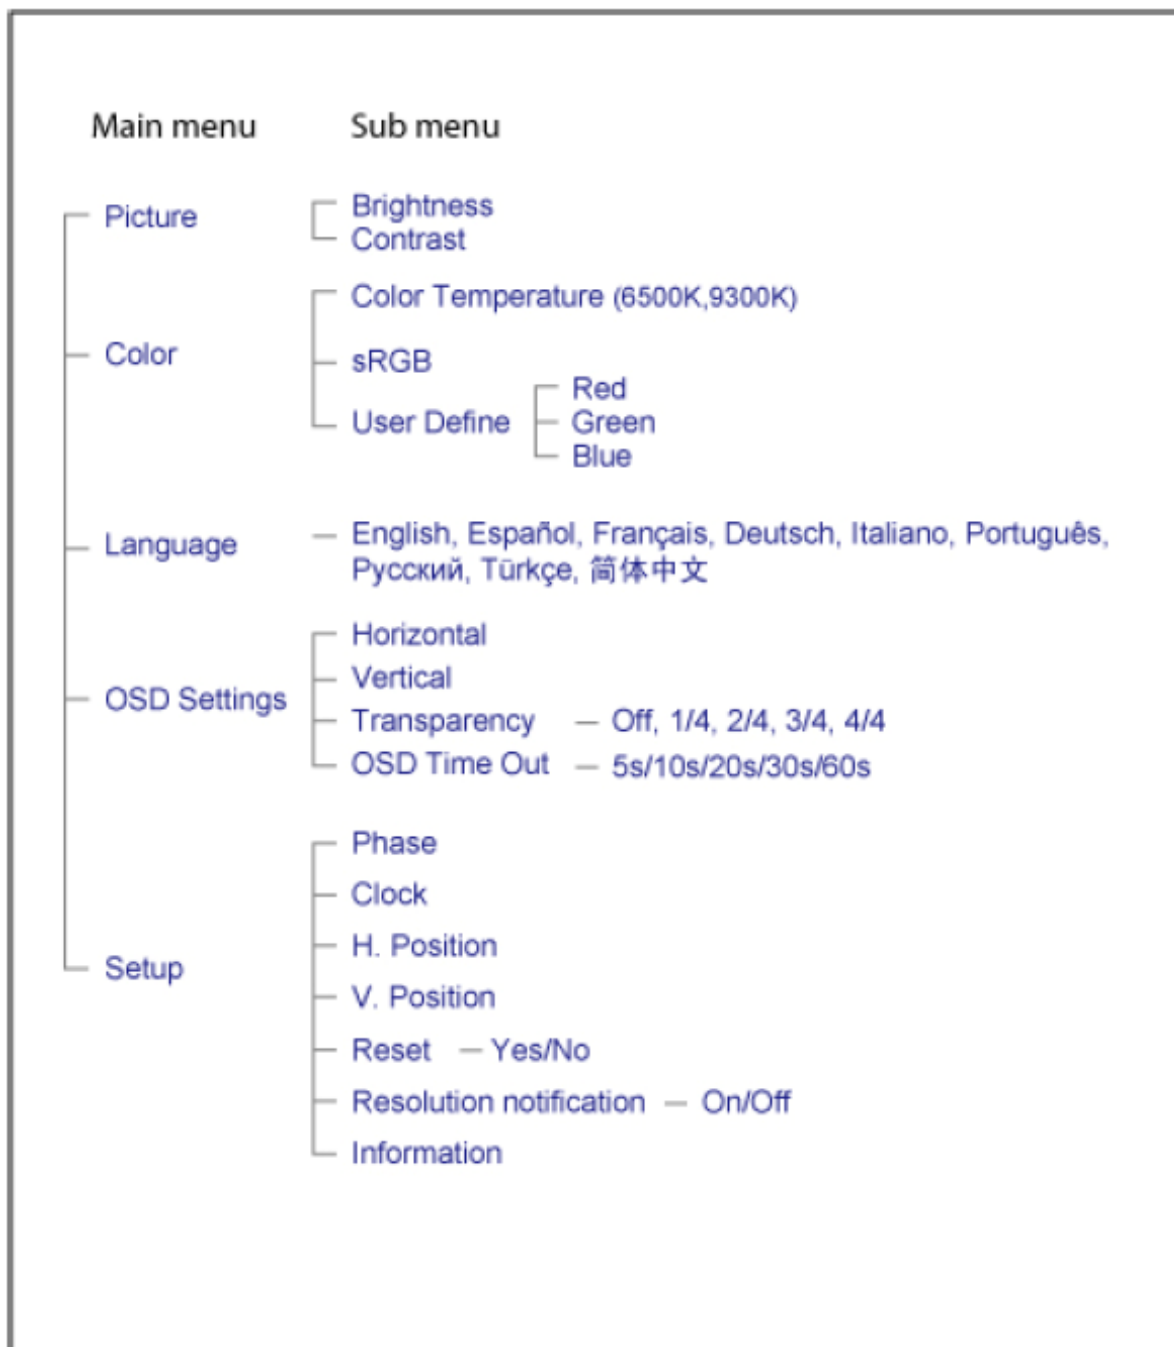Below is an overall view of the structure of the On-Screen Display. You can use this as a reference when you want to work your way around the different adjustments later on.



### 3.4 Connecting to the PC

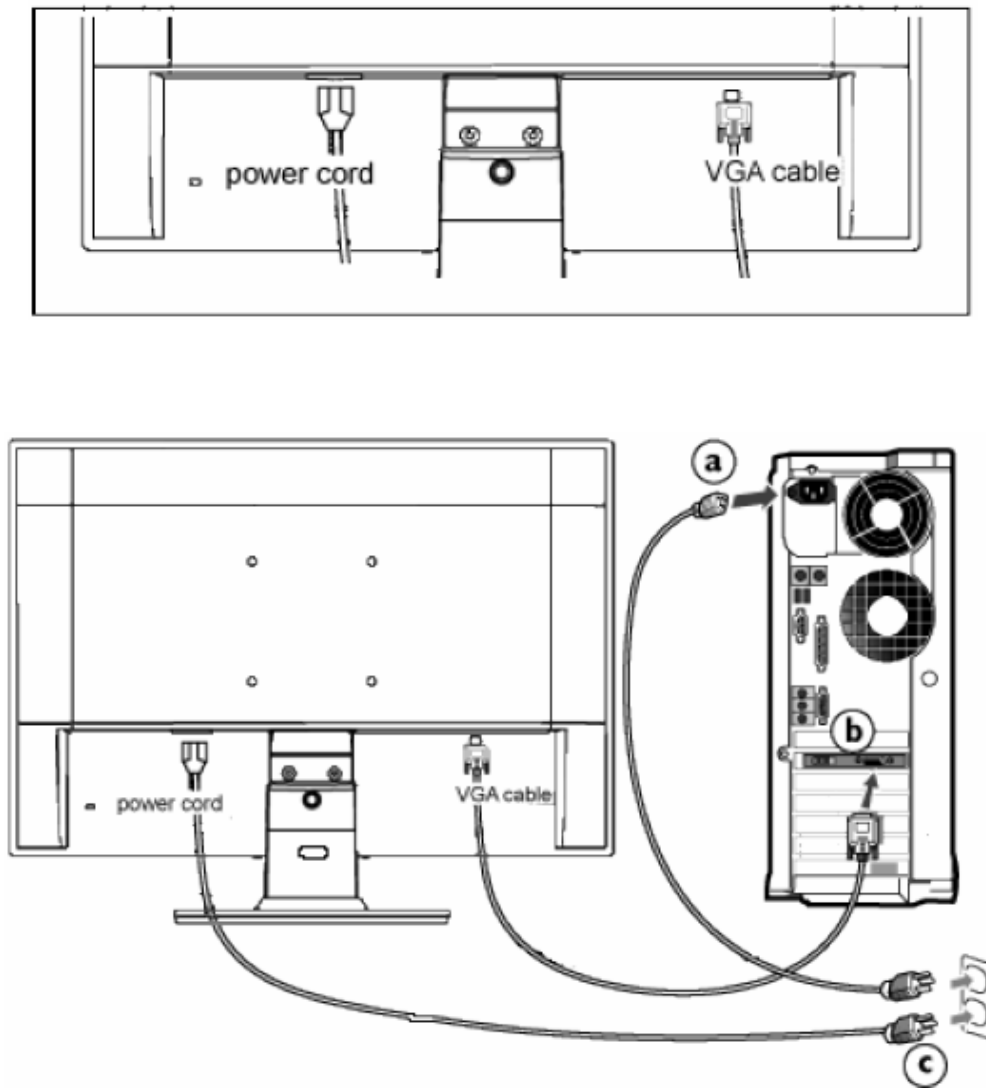1) Connect the power cord to the back of the monitor firmly.



2) Connect to PC

(a) Turn off your computer and unplug its power cable.

(b) Connect the monitor signal cable to the video connector on the back of your computer.

(c) Plug the power cord of your computer and your monitor into a nearby outlet.

(d) Turn on your computer and monitor. If the monitor displays an image, installation is complete.


## 4. Input/ Output Specification
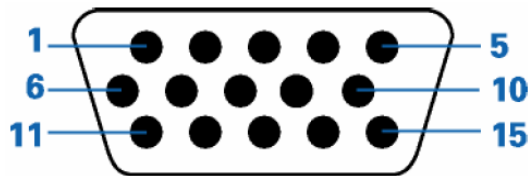
### 4.1 Input Signal Connector

#### Analog connectors

Pin No.	Description	Pin No.	Description
1.	Red video input	9.	+5V
2.	Green video input	10.	Logic Ground
3.	Blue video input	11.	Ground
4.	Sense (GND)	12.	Serial data line (SDA)
5.	Cable detect (GND)	13.	H. Sync
6.	Red video ground	14.	V. Sync
7.	Green video ground	15.	Data clock line (SCL)
8.	Blue video ground		

VGA connector layout



### 4.2 Factory Preset Display Modes

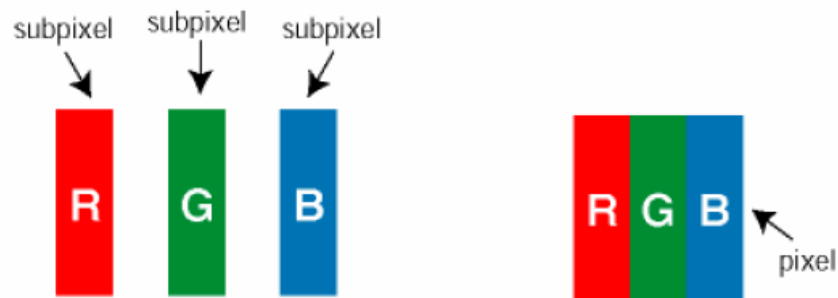
H. freq (kHz)	Resolution	V. freq (Hz)
31.47	720*400	70.09
31.47	640*480	59.94
37.50	640*480	75.00
37.88	800*600	60.32
46.88	800*600	75.00
48.36	1024*768	60.00
60.02	1024*768	75.03
63.89	1280*1024	60.02
79.98	1280*1024	75.03
55.94	1440*900	59.89
70.64	1440*900	74.98



## 4.3 Pixel Defect Policy

### Philips' Flat Panel Monitors Pixel Defect Policy

Philips strives to deliver the highest quality products. We use some of the industry's most advanced manufacturing processes and practice stringent quality control. However, pixel or sub pixel defects on the TFT LCD panels used in flat panel monitors are sometimes unavoidable. No manufacturer can guarantee that all panels will be free from pixel defects, but Philips guarantees that any monitor with an unacceptable number of defects will be repaired or replaced under warranty. This notice explains the different types of pixel defects and defines acceptable defect levels for each type. In order to qualify for repair or replacement under warranty, the number of pixel defects on a TFT LCD panel must exceed these acceptable levels. For example, no more than 0.0004% of the sub pixels on a 19" XGA monitor may be defective. Furthermore, Philips sets even higher quality standards for certain types or combinations of pixel defects that are more noticeable than others. This policy is valid worldwide.




#### Pixels and Sub pixels

A pixel, or picture element, is composed of three sub pixels in the primary colors of red, green and blue. Many pixels together form an image. When all sub pixels of a pixel are lit, the three colored sub pixels together appear as a single white pixel. When all are dark, the three colored sub pixels together appear as a single black pixel. Other combinations of lit and dark sub pixels appear as single pixels of other colors.

#### Types of Pixel Defects

Pixel and sub pixel defects appear on the screen in different ways. There are two categories of pixel defects and several types of sub pixel defects within each category.

**Bright Dot Defects** Bright dot defects appear as pixels or sub pixels that are always lit or 'on'. That is, a *bright dot* is a sub-pixel that stands out on the screen when the monitor displays a dark pattern. There are three types of bright dot defects:



One lit red, green or blue sub pixel



Two adjacent lit sub pixels:

- Red + Blue = Purple
- Red + Green = Yellow
- Green + Blue = Cyan (Light Blue)




Three adjacent lit sub pixels  
(one white pixel)




A red or blue *bright dot* must be more than 50 percent brighter than neighboring dots while a green bright dot is 30 percent brighter than neighboring dots.

**Black Dot Defects** Black dot defects appear as pixels or sub pixels that are always dark or 'off'. That is, a *dark dot* is a sub-pixel that stands out on the screen when the monitor displays a light pattern. There are two types of black dot defects:



One dark sub pixel



Two or three adjacent dark sub pixels

### Proximity of Pixel Defects

Because pixel and sub pixels defects of the same type that are near to one another may be more noticeable, Philips also specifies tolerances for the proximity of pixel defects.

## Pixel Defect Tolerances

In order to qualify for repair or replacement due to pixel defects during the warranty period, a TFT LCD panel in a Philips flat panel monitor must have pixel or sub pixel defects exceeding the tolerances listed in the following tables.

<b>BRIGHT DOT DEFECTS</b>	<b>ACCEPTABLE LEVEL</b>
<i>MODEL</i>	<b>190VW9</b>
1 lit subpixel	3
2 adjacent lit subpixels	1
3 adjacent lit subpixels (one white pixel)	0
Distance between two bright dot defects*	>15mm
Total bright dot defects of all types	3

<b>BLACK DOT DEFECTS</b>	<b>ACCEPTABLE LEVEL</b>
<i>MODEL</i>	<b>190VW9</b>
1 dark subpixel	5
2 adjacent dark subpixels	2
3 adjacent dark subpixels	0
Distance between two black dot defects*	>15mm
Total black dot defects of all types	5

<b>TOTAL DOT DEFECTS</b>	<b>ACCEPTABLE LEVEL</b>
<i>MODEL</i>	<b>190VW9</b>
Total bright or black dot defects of all types	5

Note:

\* 1 or 2 adjacent sub pixel defects = 1 dot defect

### 4.4 Failure Mode Of Panel


Quick reference for failure mode of LCD panel

this page presents problems that could be made by LCD panel. It is not necessary to repair circuit board. Simply follow the mechanical instruction on this manual to eliminate failure by replace LCD panel.


Failure description

Phenomenon


Vertical block defect



Vertical dim lines




Vertical lines defect  
(Always bright or dark)




Horizontal block defect



Horizontal dim lines



Horizontal lines defect  
(Always bright or dark)



Has bright or dark pixel




Polarizer has bubbles



Polarizer has bubbles



Foreign material inside polarizer. It shows liner or dot shape.



Concentric circle formed



Bottom back light of LCD is brighter than normal



Back light un-uniformity




Backlight has foreign material. Black or white color, liner or circular type



### 5. Block Diagram

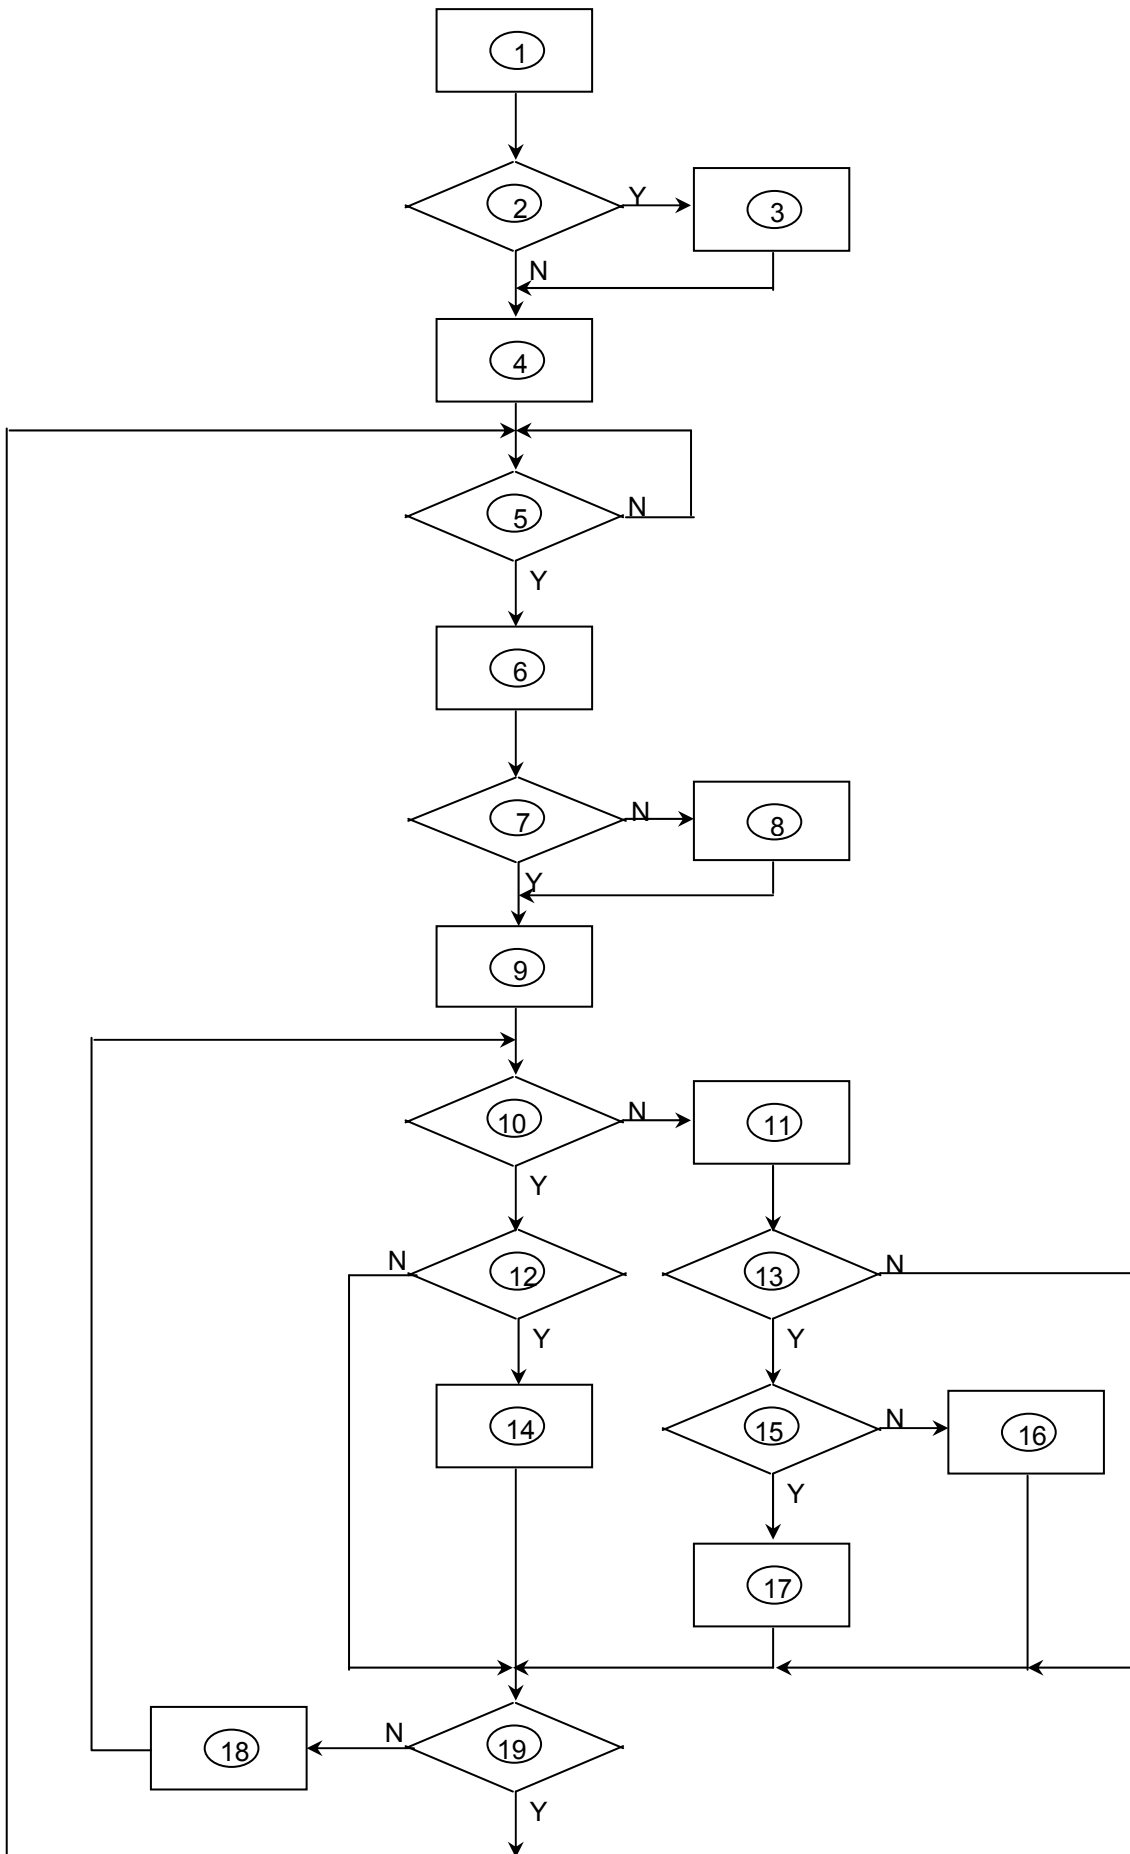
#### 5.1 Software Flow Chat




1) MCU initialize.
2) Is the EPROM blank?
3) Program the EPROM by default values.
4) Get the PWM value of brightness from EPROM.
5) Is the power key pressed?
6) Clear all global flags.
7) Are the AUTO and SELECT keys pressed?
8) Enter factory mode.
9) Save the power key status into EPROM. Turn on the LED and set it to green color. Scalar initializes.
10) In standby mode?
11) Update the lifetime of back light.
12) Check the analog port, are there any signals coming?
13) Does the scalar send out an interrupt request?
14) Wake up the scalar.
15) Are there any signals coming from analog port?
16) Display "No connection Check Signal Cable" message. And go into standby mode after the message disappear.
17) Program the scalar to be able to show the coming mode.
18) Process the OSD display.
19) Read the keyboard. Is the power key pressed?

## 5.2 Electrical Block Diagram
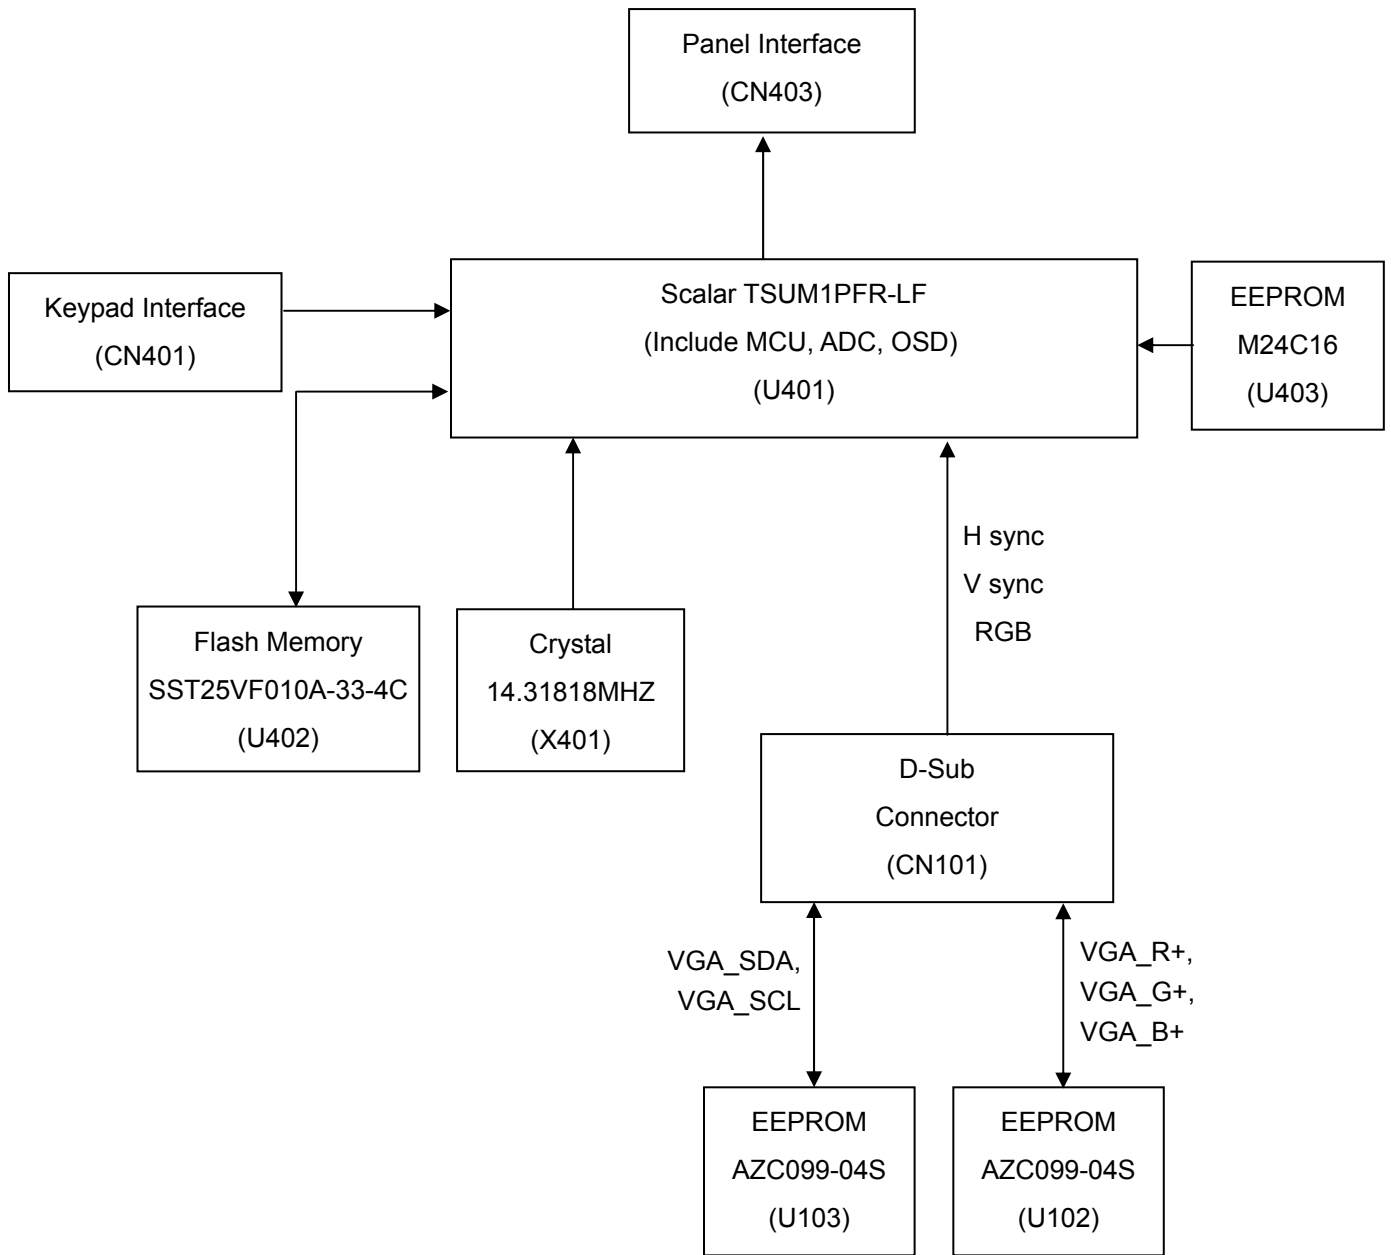
### 5.2.1 Main Board



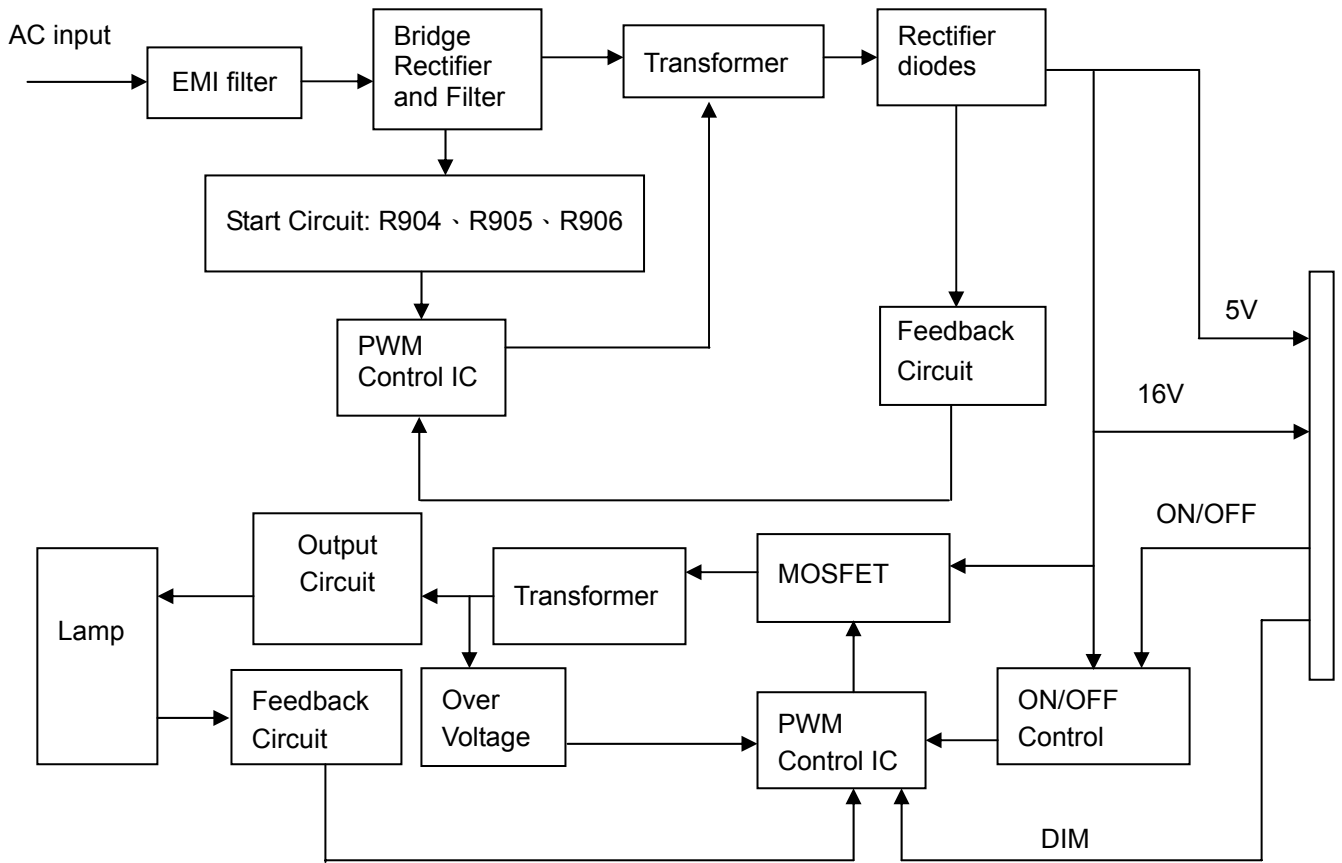5.2.2 Inverter/Power Board







# 6. Schematic

## 6.1 Main Board

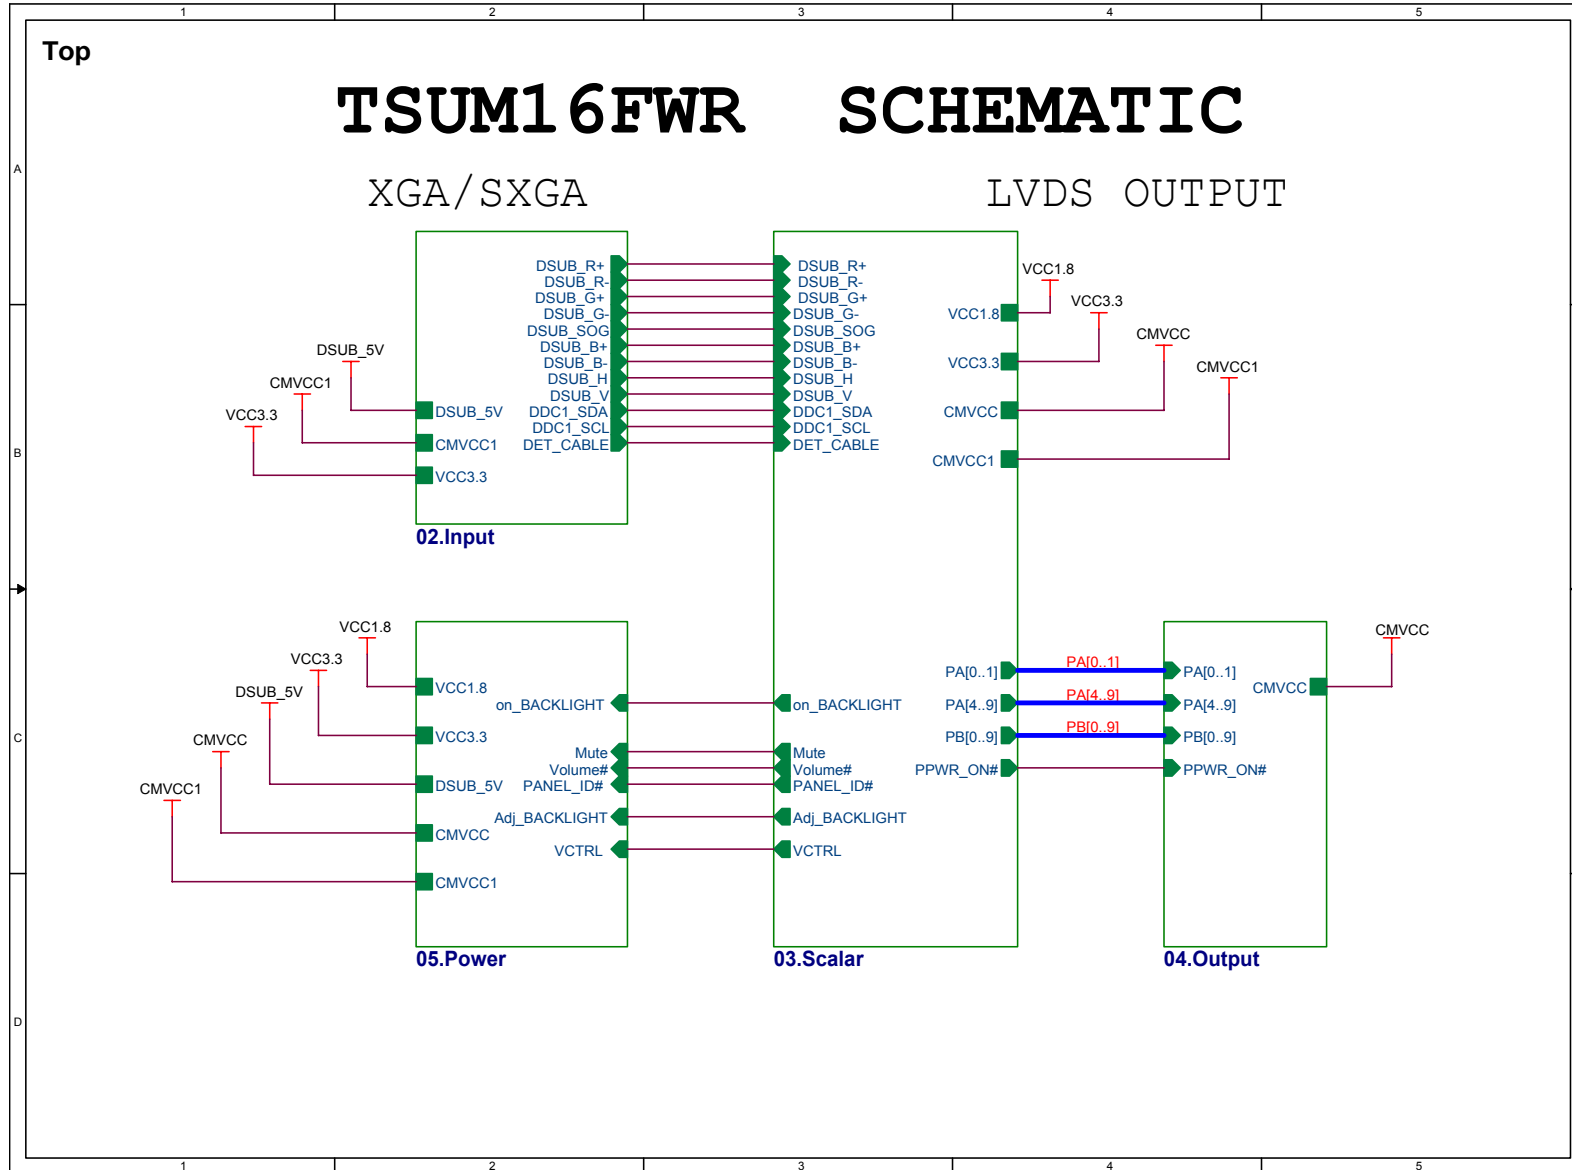
715G2904-1



Input

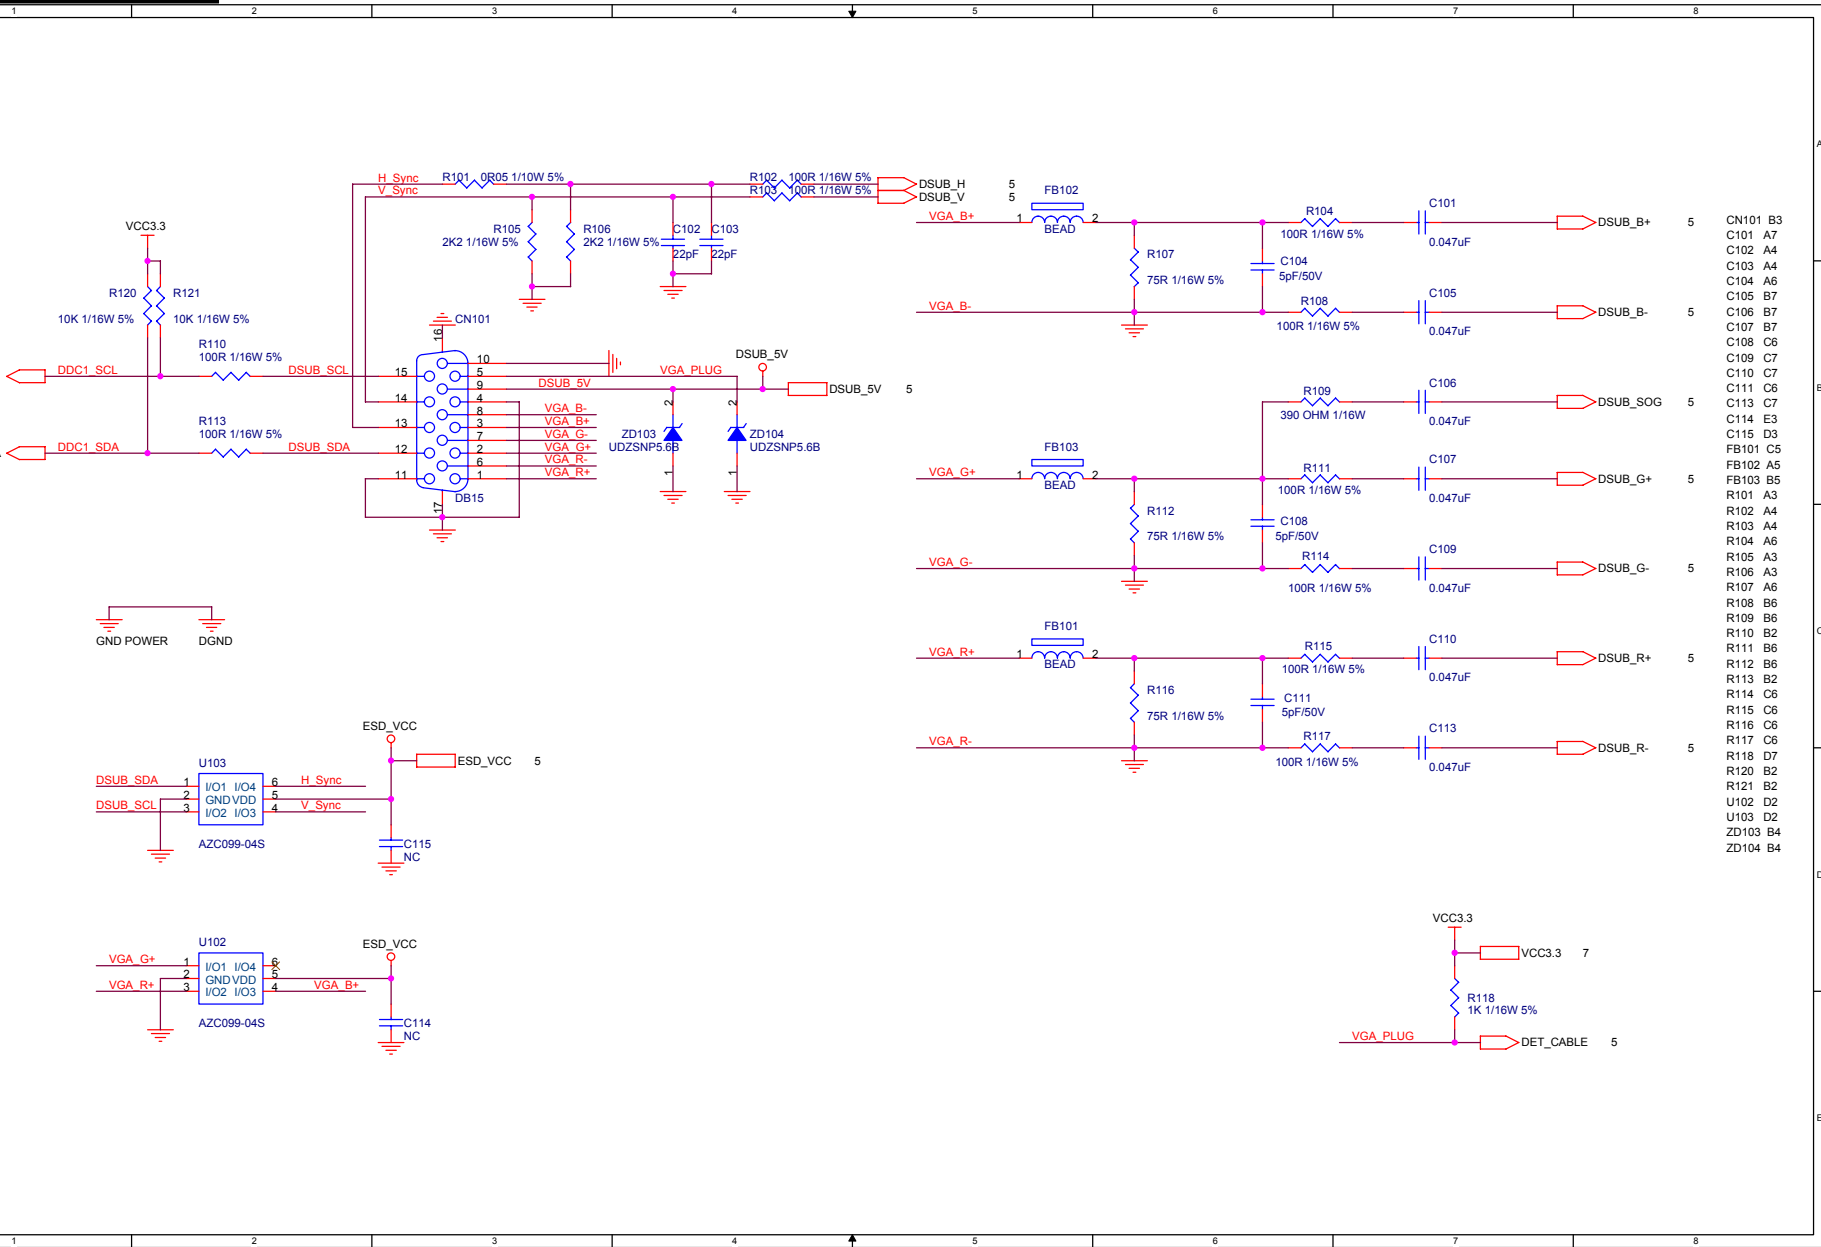

- CN101 B3
- C101 A7
- C102 A4
- C103 A4
- C104 A6
- C105 B7
- C106 B7
- C107 B7
- C108 C6
- C109 C7
- C110 C7
- C111 C6
- C112 B6
- C113 C7
- C114 E3
- C115 D3
- FB101 C5
- FB102 A5
- FB103 B5
- R101 A3
- R102 A4
- R103 A4
- R104 A6
- R105 A3
- R106 A3
- R107 A6
- R108 B6
- R109 B6
- R110 B2
- R111 B6
- R112 B2
- R113 C6
- R114 C6
- R115 C6
- R116 C6
- R117 C6
- R118 D7
- R120 B2
- R121 B2
- U102 D2
- U103 D2
- ZD103 B4
- ZD104 B4

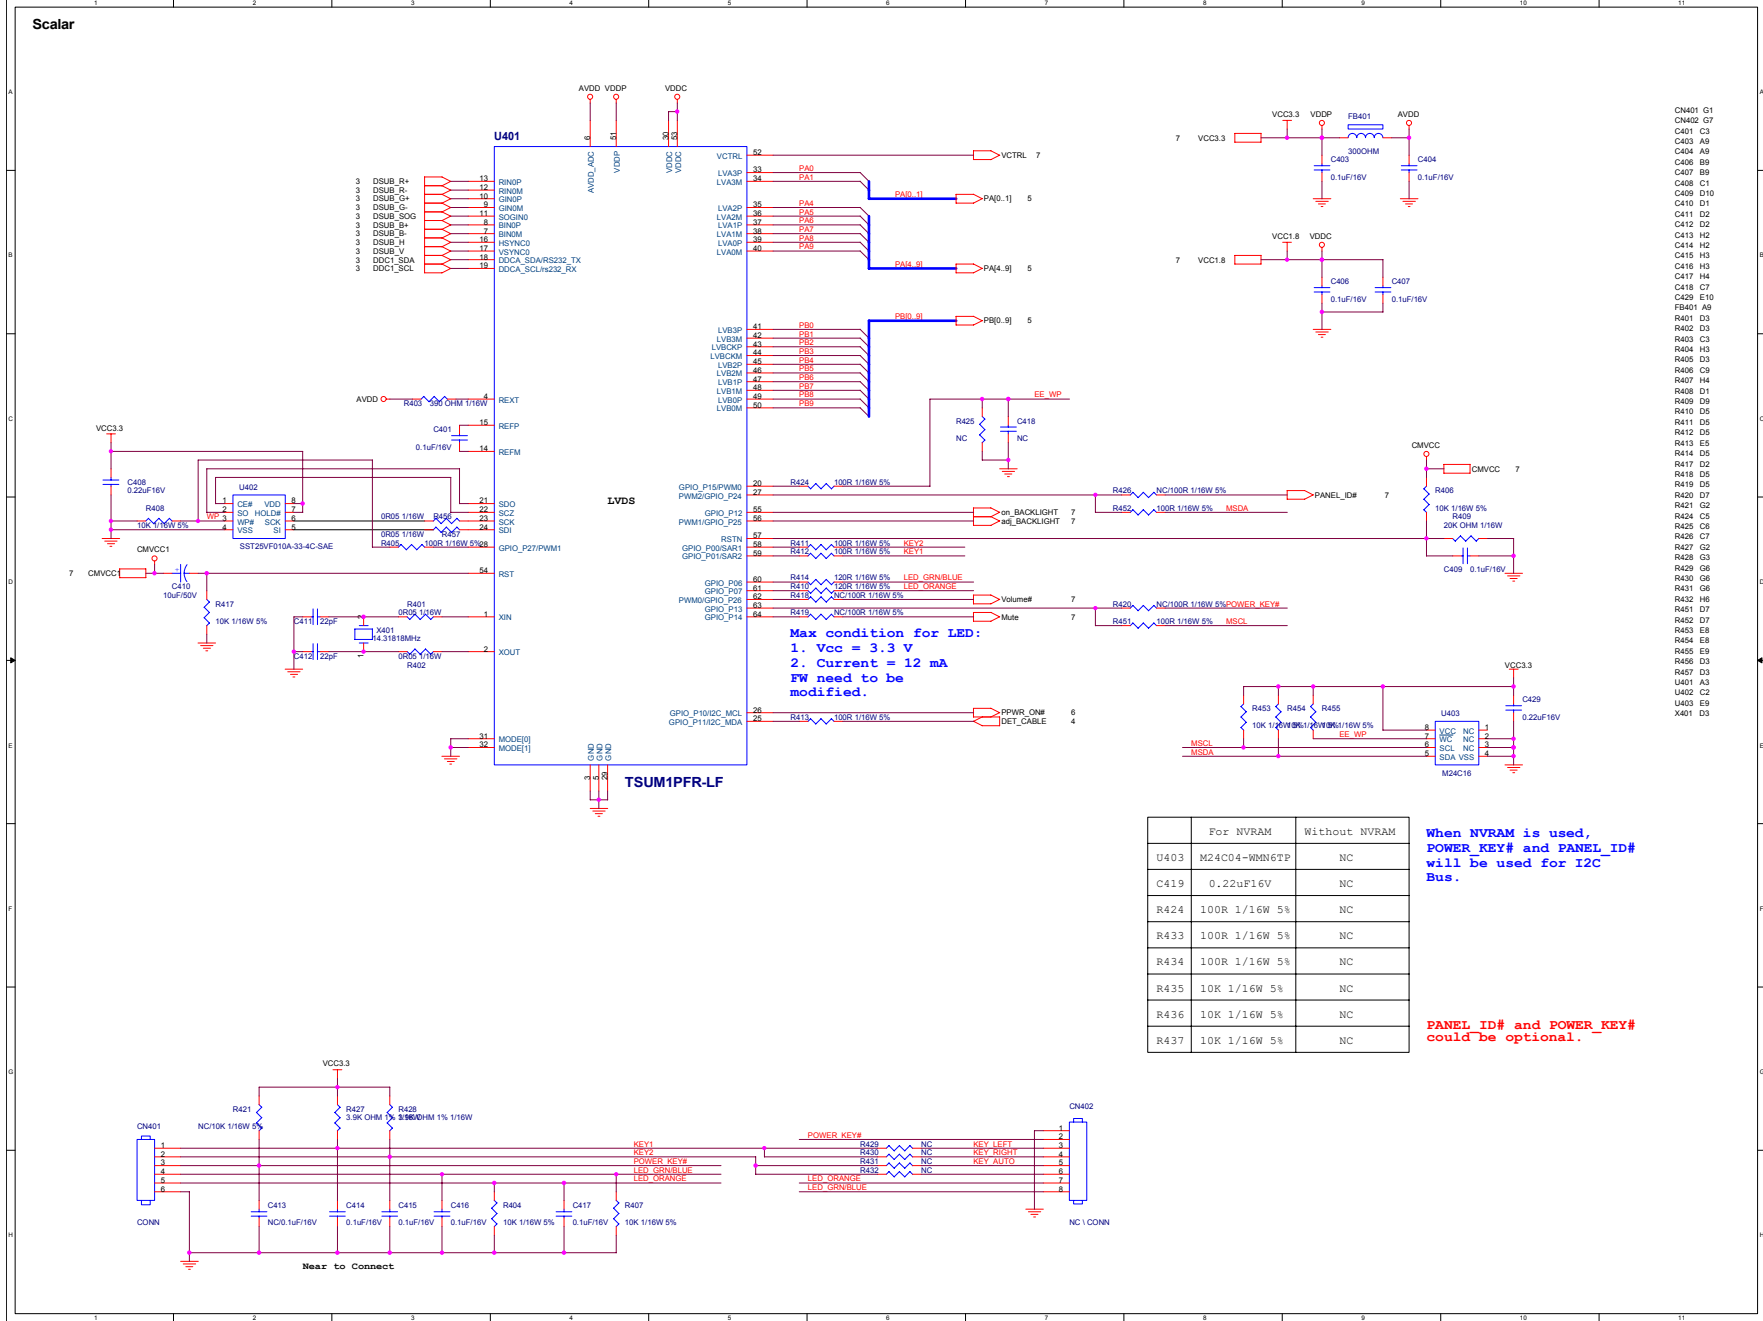


	For NVRAM	Without NVRAM
U403	M24C04-WMN6TP	NC
C419	0.22uF16V	NC
R424	100R 1/16W 5%	NC
R433	100R 1/16W 5%	NC
R434	100R 1/16W 5%	NC
R435	10K 1/16W 5%	NC
R436	10K 1/16W 5%	NC
R437	10K 1/16W 5%	NC

When NVRAM is used, POWER\_KEY# and PANEL\_ID# will be used for I2C Bus.

PANEL\_ID# and POWER\_KEY# could be optional.

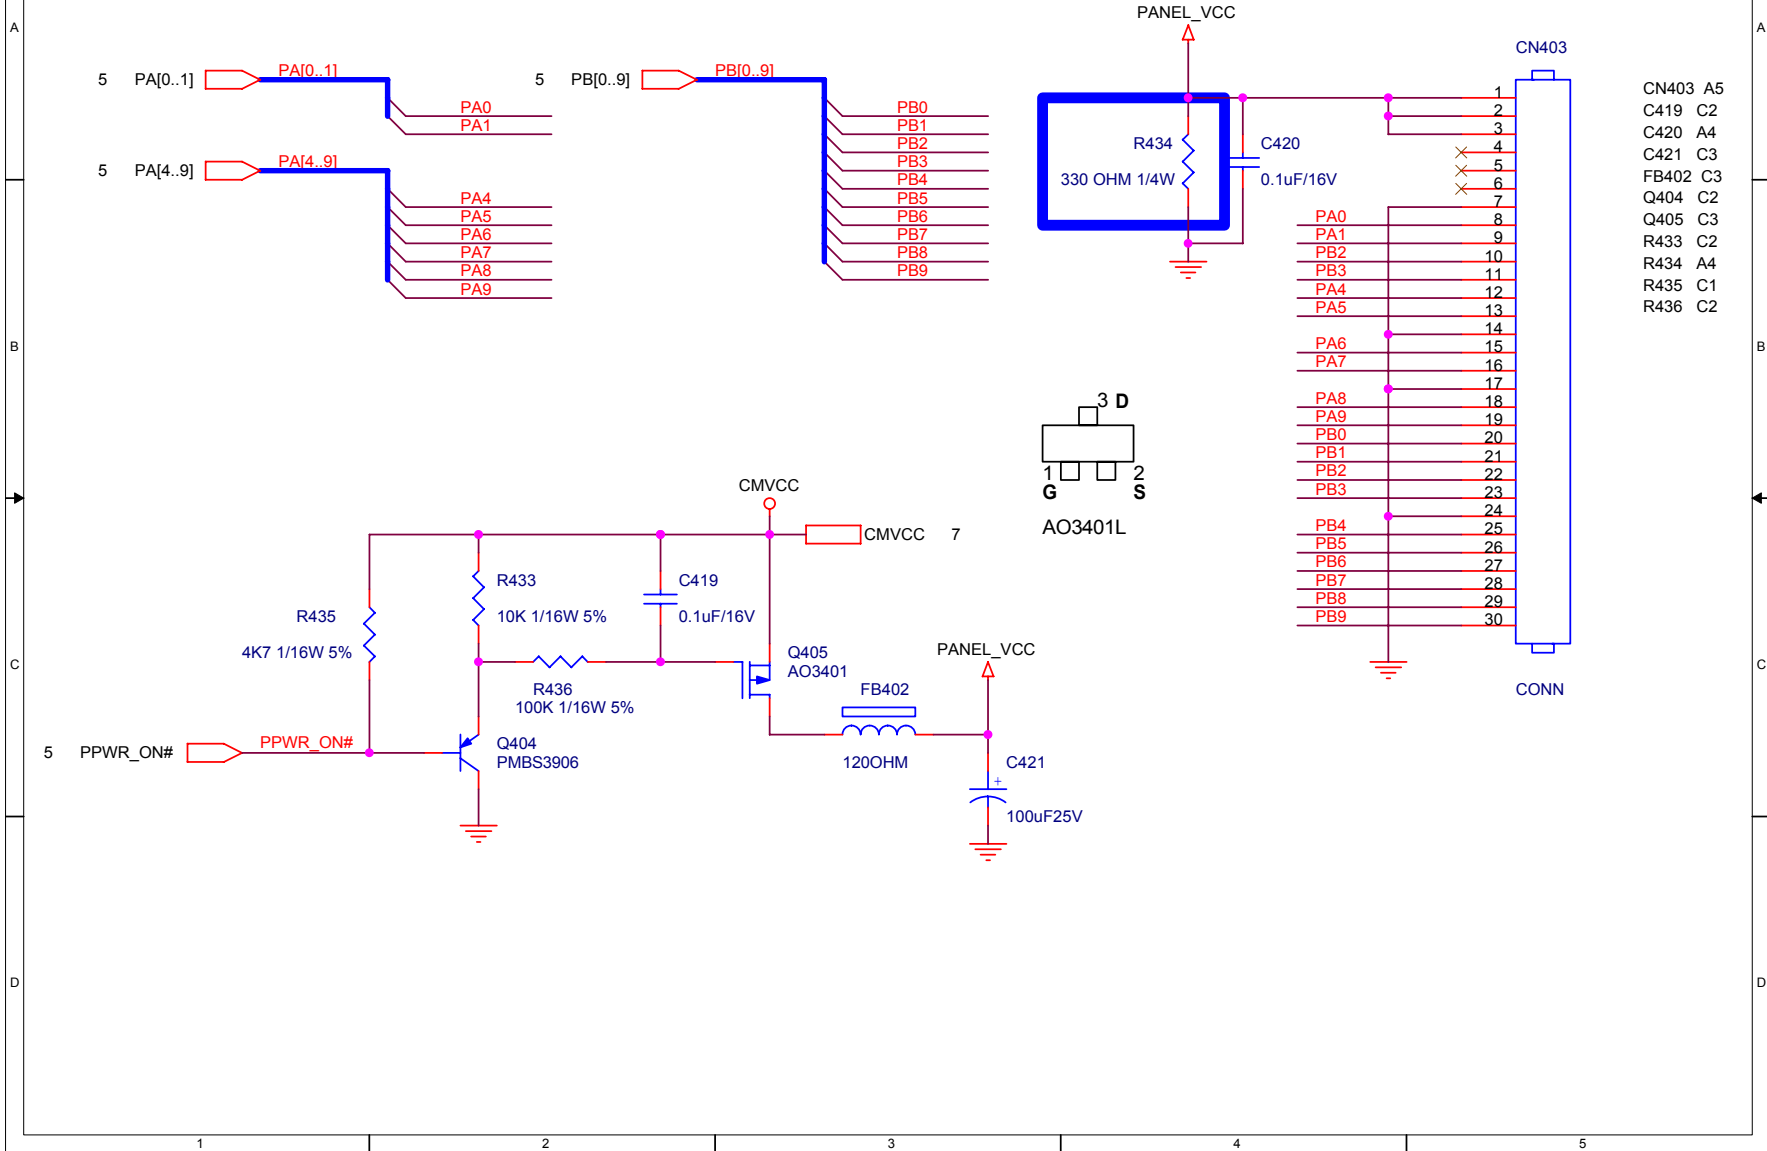Output









Power

Due to LG doesn't request PC'99 Function.

	D401	R458
LG	NC	00hm 1/16W
OTHER	BAV99	NC

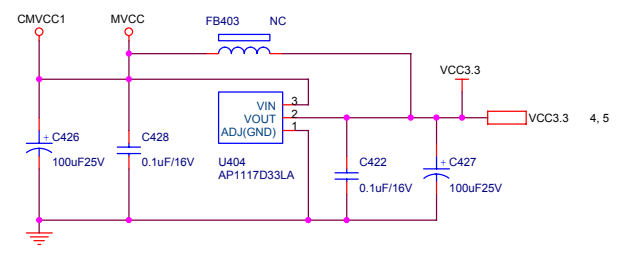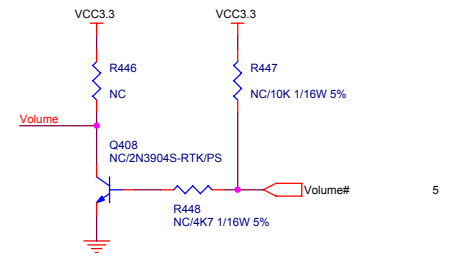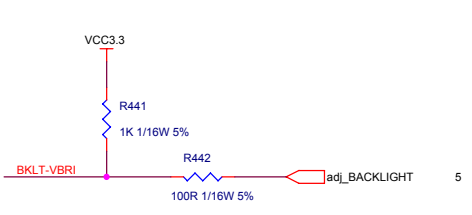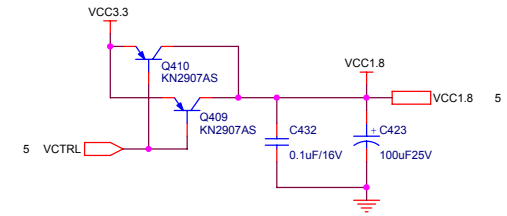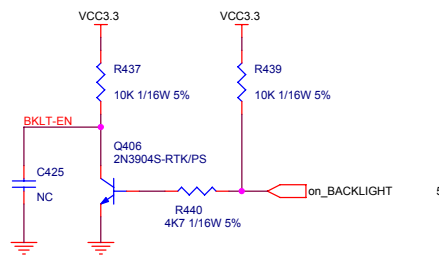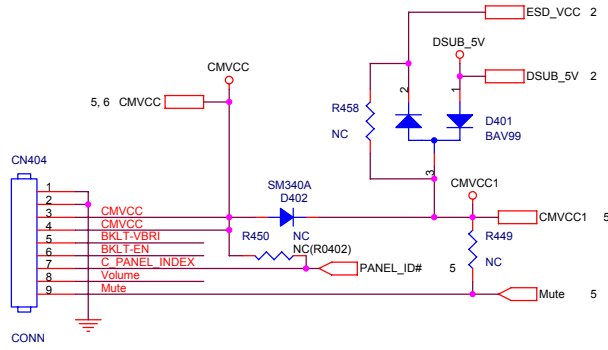
- CN404 B1
- C422 D6
- C423 B7
- C425 B3
- C426 D5
- C427 D7
- C428 D5
- C432 B7
- D401 A2
- D402 B2
- FB403 C6
- Q406 B4
- Q408 D3
- Q409 B6
- Q410 B6
- R437 B4
- R439 B4
- R440 B4
- R441 C1
- R442 D1
- R446 C3
- R447 C4
- R448 D4
- R449 B3
- R450 B2
- R458 A2
- U404 C6




U404 can use package 232 or 252.

6.2 Power Board

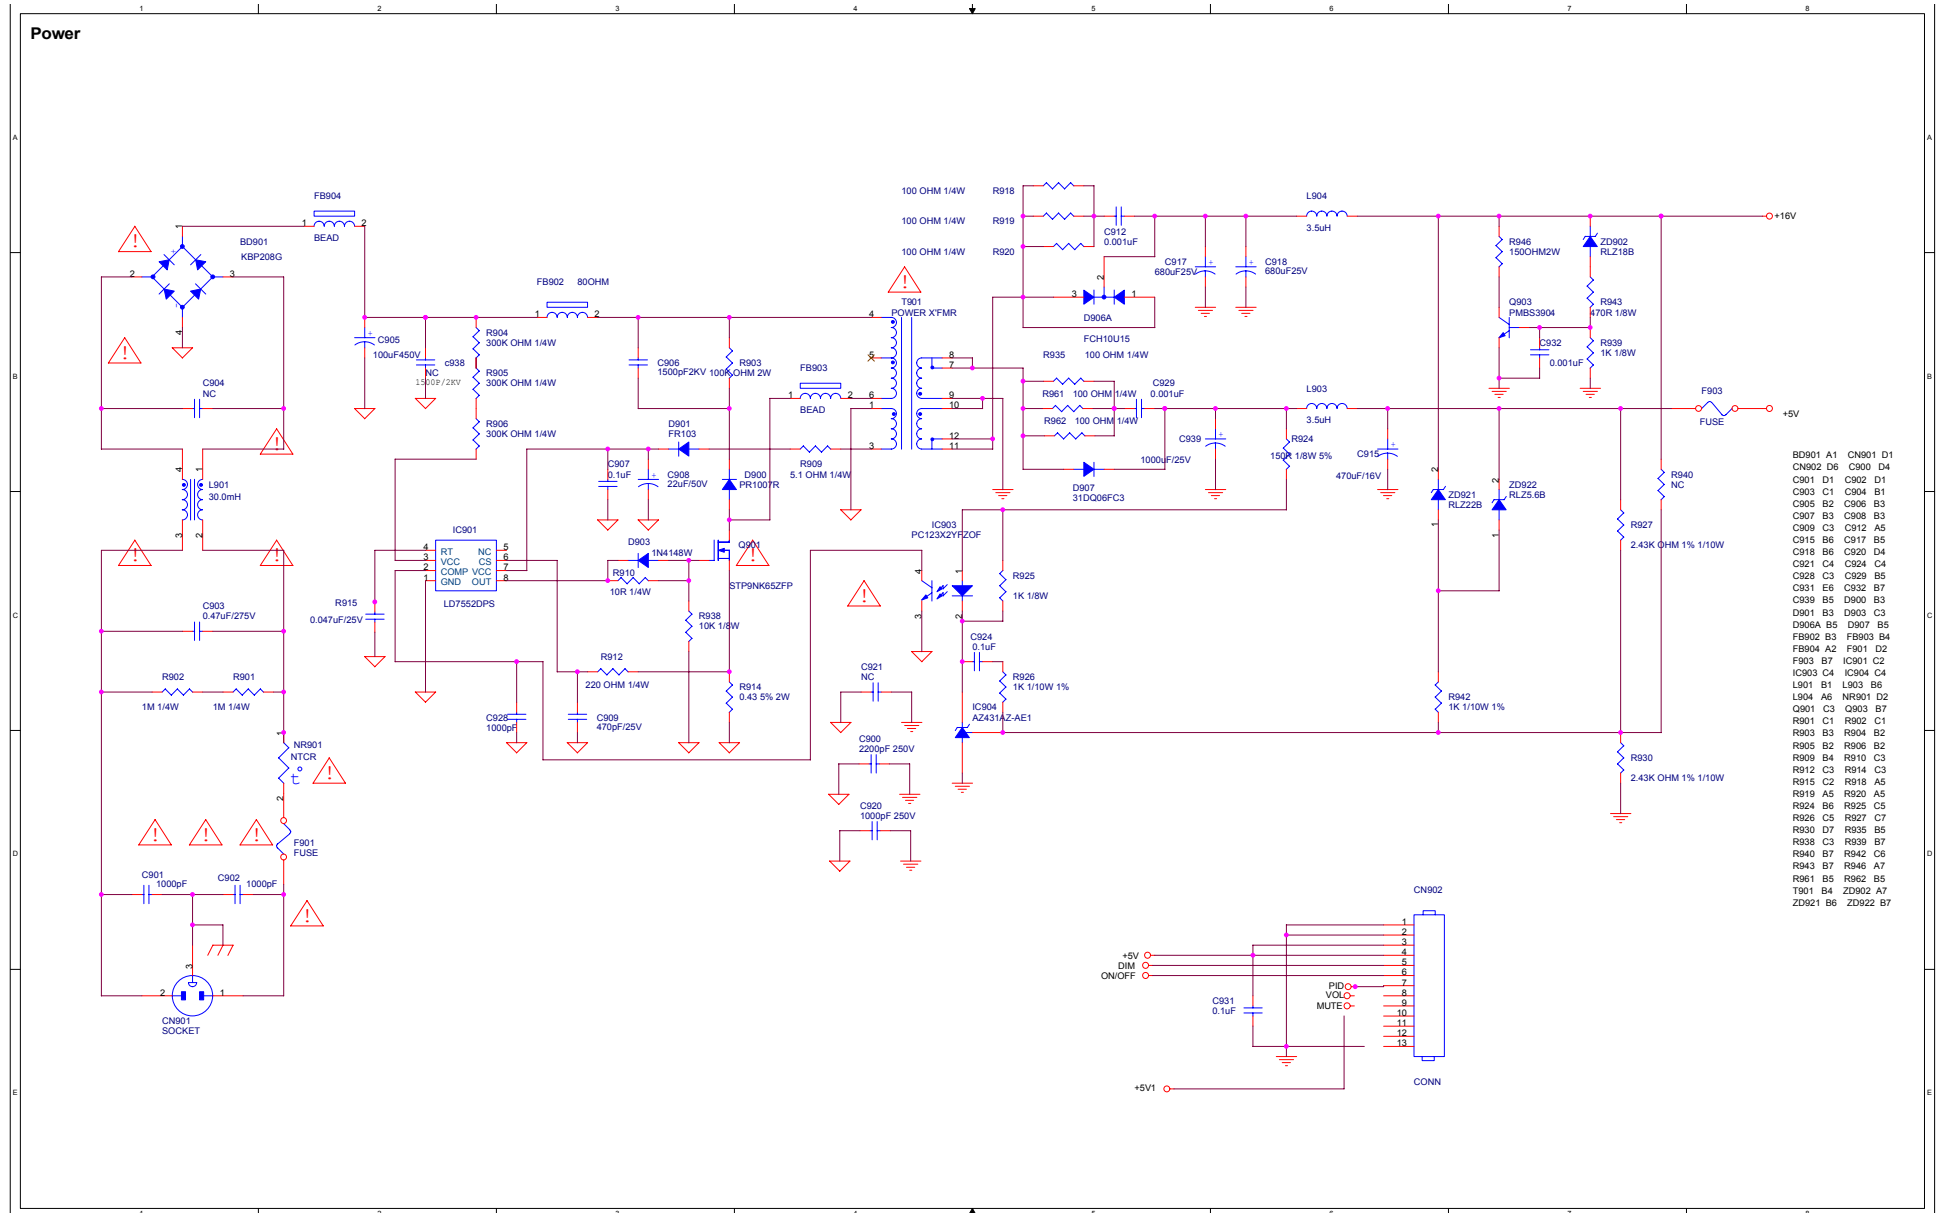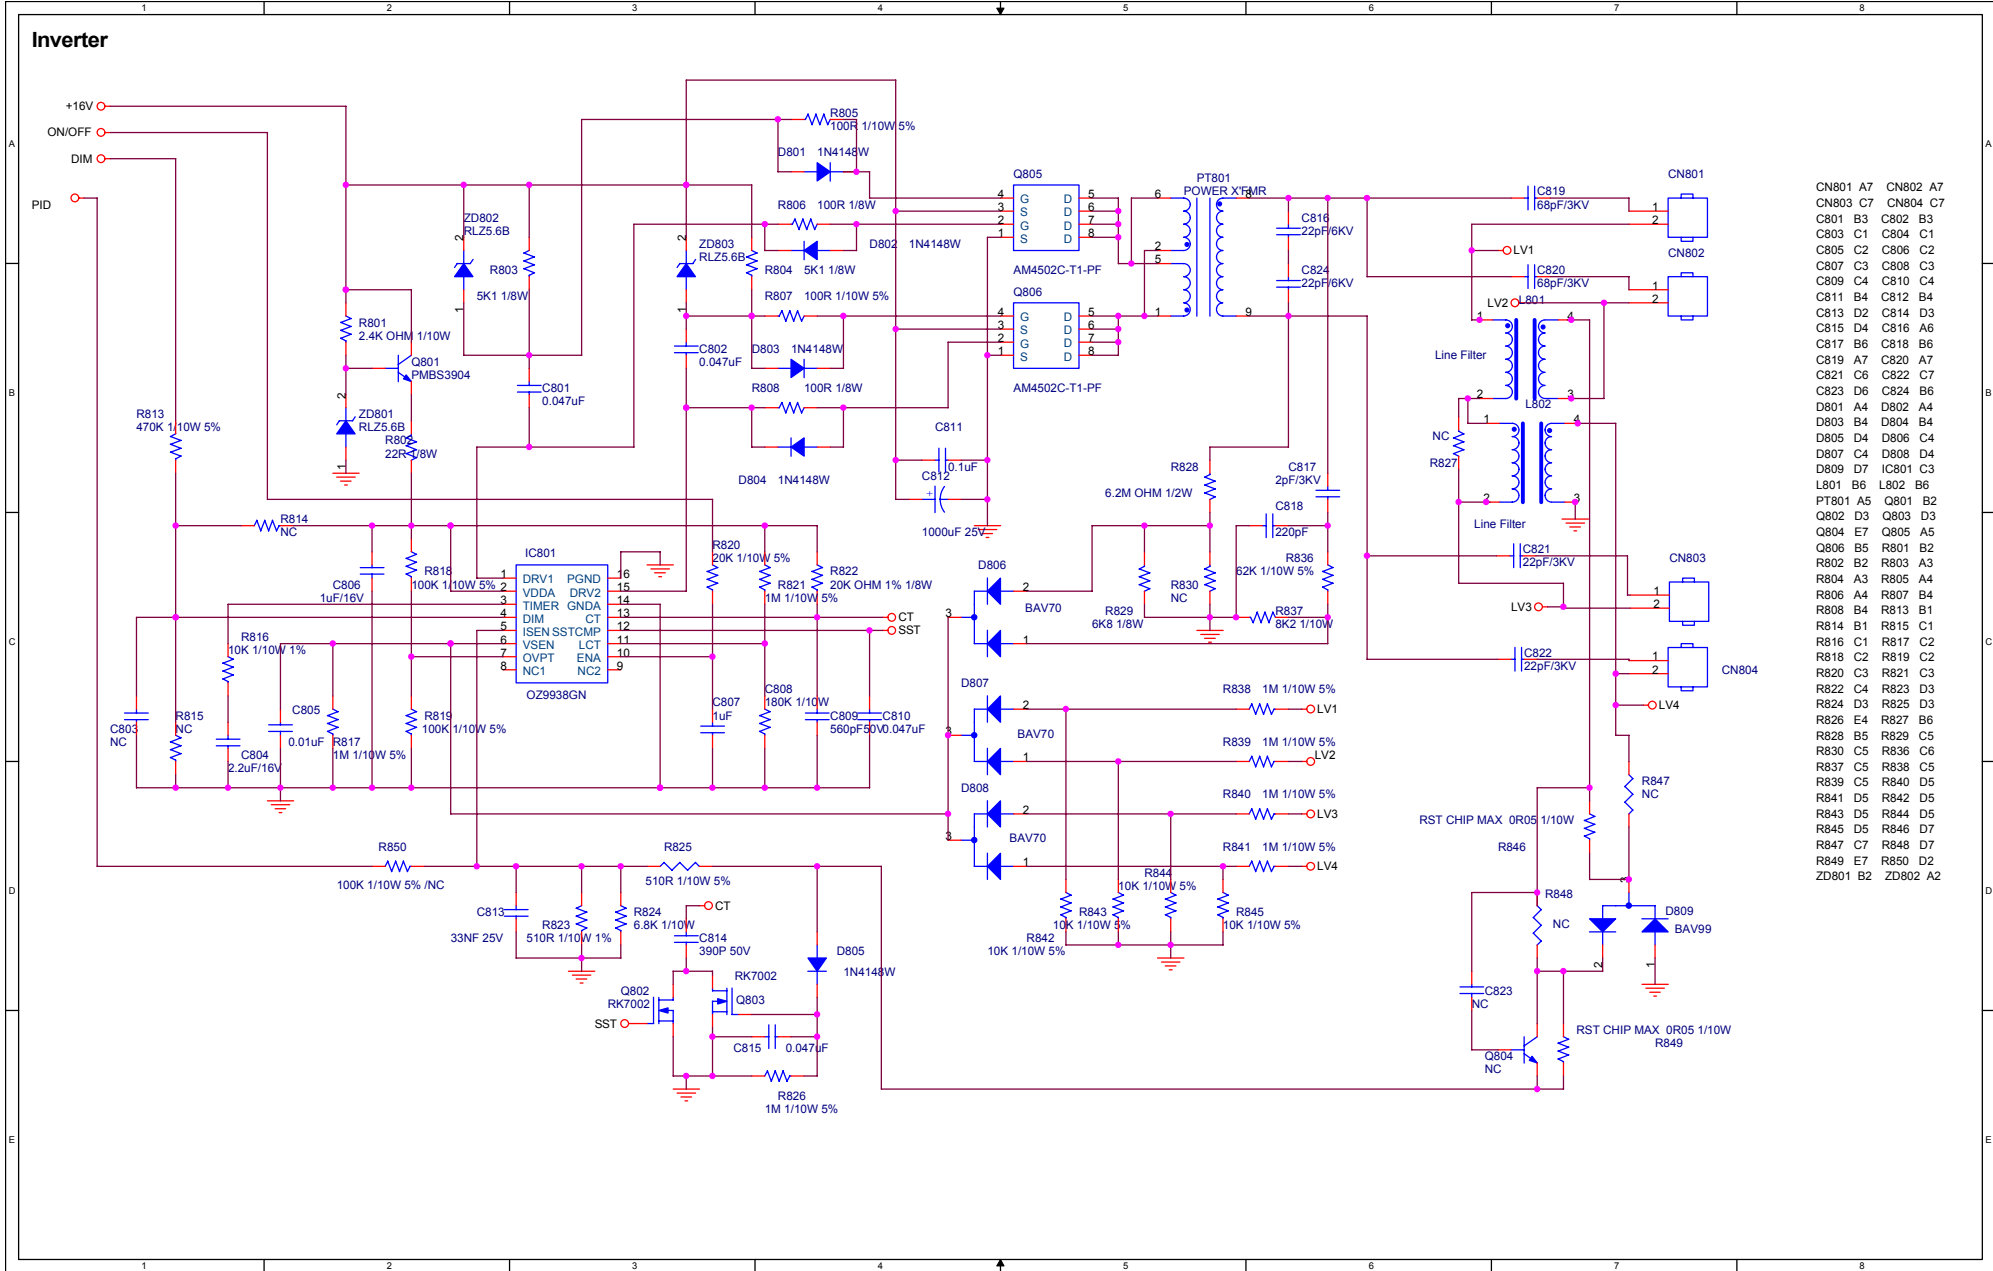715G2824-I






- CN801 A7
- CN802 A7
- CN803 C7
- CN804 C7
- C801 B3
- C802 B3
- C803 C1
- C804 C1
- C805 C2
- C806 C2
- C807 C3
- C808 C3
- C809 C4
- C810 C4
- C811 B4
- C812 B4
- C813 D2
- C814 D3
- C815 D4
- C816 A6
- C817 B6
- C818 B6
- C819 A7
- C820 A7
- C821 C6
- C822 C7
- C823 D6
- C824 B6
- D801 A4
- D802 A4
- D803 B4
- D804 B4
- D805 D4
- D806 C4
- D807 C4
- D808 D4
- D809 D7
- IC801 C3
- L801 B6
- L802 B6
- PT801 A5
- Q801 B2
- Q802 D3
- Q803 D3
- Q804 E7
- Q805 A5
- Q806 B5
- Q807 B2
- Q808 A3
- R804 A3
- R805 A4
- R806 A4
- R807 B4
- R808 B4
- R813 B1
- R814 B1
- R815 C1
- R816 C1
- R817 C2
- R818 C2
- R819 C2
- R820 C3
- R821 C3
- R822 C4
- R823 D3
- R824 D3
- R825 D3
- R826 E4
- R827 B6
- R828 B5
- R829 C5
- R830 C5
- R836 C6
- R837 C5
- R838 C5
- R839 C5
- R840 D5
- R841 D5
- R842 D5
- R843 D5
- R844 D5
- R845 D5
- R846 D7
- R847 C7
- R848 D7
- R849 E7
- R850 D2
- ZD801 B2
- ZD802 A2

6.3 Key Board

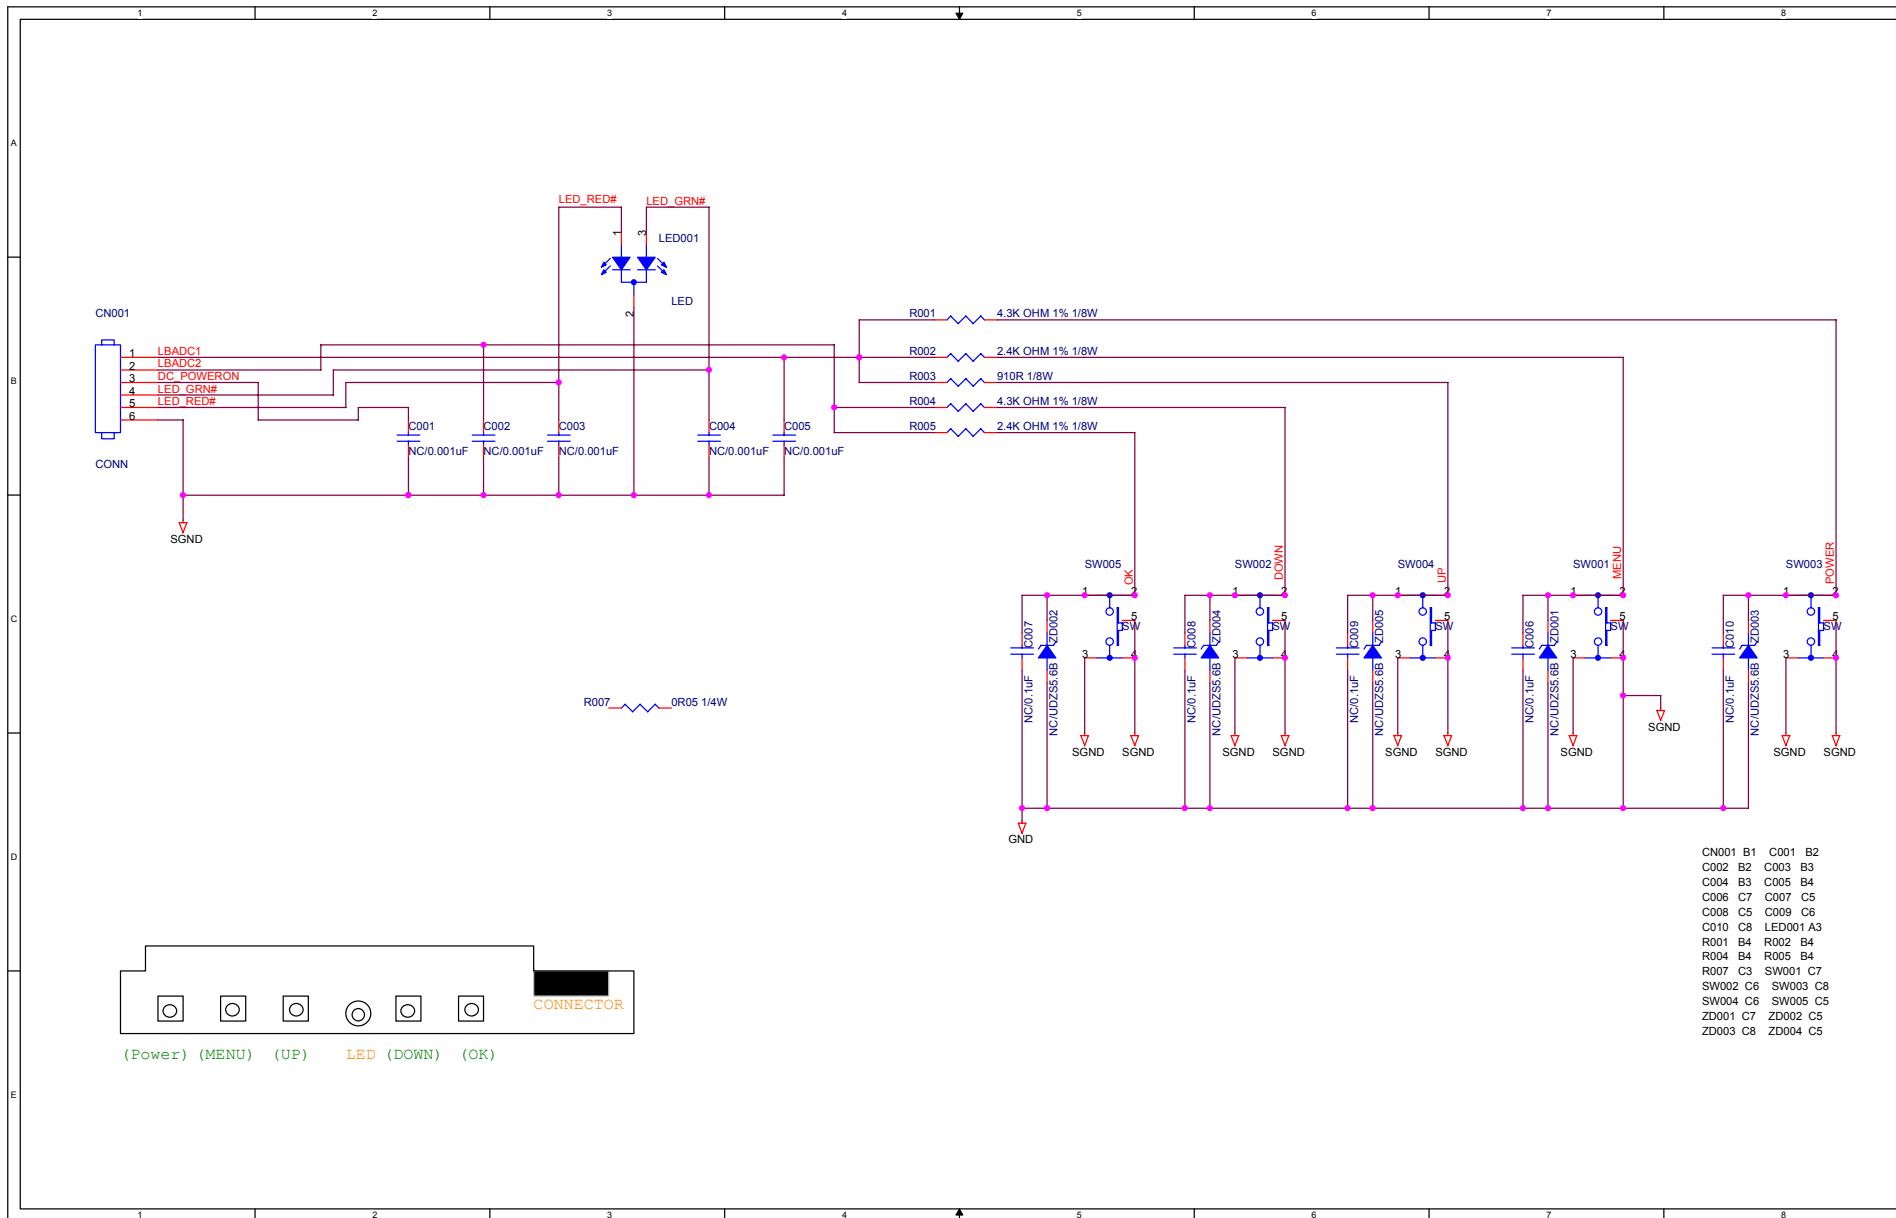715G3016-1







# 7. PCB Layout

## 7.1 Main Board

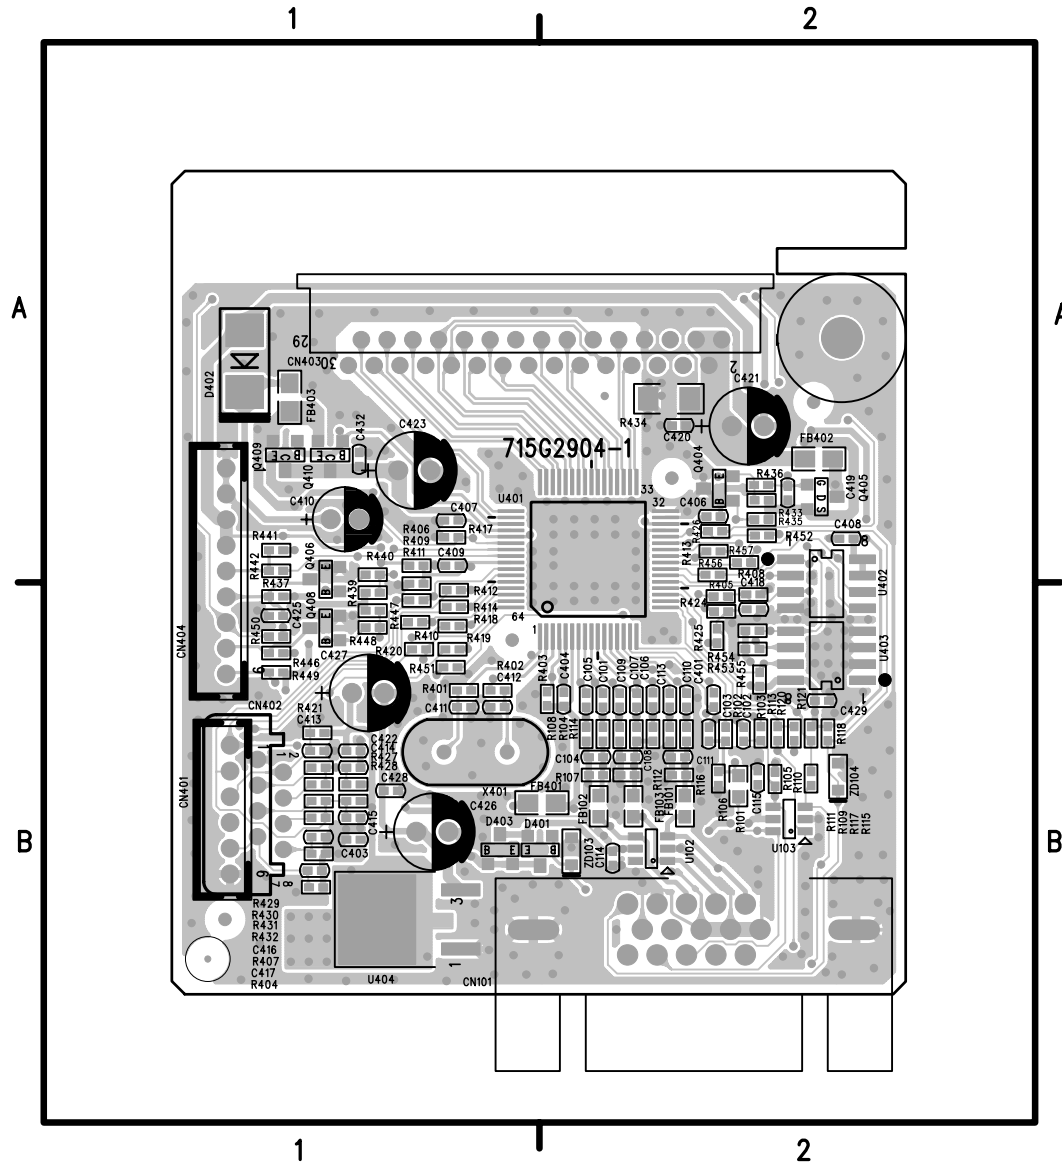715G2904-1




C101	B2	FB101	B2	R418	B1	C428	B1
C102	B2	FB102	B2	R419	B1	R405	B2
C103	B2	FB103	B2	R420	B1	SEN4	B1
C104	B2	FB401	B2	R421	B1	C429	B2
C105	B2	FB402	A2	R424	B2	R406	A1
C106	B2	FB403	A1	R425	B2	U102	B2
C107	B2	FDT2	?1	R426	A2	C432	A1
C108	B2	FDT3	?6	R427	B1	R407	B1
C109	B2	Q404	A2	R428	B1	U103	B2
C110	B2	Q405	A2	R429	B1	CN101	B2
C111	B2	Q406	B1	R430	B1	R408	B2
C113	B2	Q408	B1	R431	B1	U401	A2
C114	B2	Q409	A1	R432	B1	CN401	B1
C115	B2	Q410	A1	R433	A2	R409	B1
C401	B2	R101	B2	R434	A2	U402	A2
C403	B1	R102	B2	R435	A2	CN402	B1
C404	B2	R103	B2	R436	A2	R410	B1
C406	A2	R104	B2	R437	B1	U403	B2
C407	A1	R105	B2	R439	B1	CN403	A1
C408	A2	R106	B2	R440	A1	R411	B1
C409	A1	R107	B2	R441	A1	U404	B1
C410	A1	R108	B2	R442	A1	CN404	A1
C411	B1	R109	B2	R446	B1	R412	B1
C412	B1	R110	B2	R447	B1	X401	B1
C413	B1	R111	B2	R448	B1	D401	B2
C414	B1	R112	B2	R449	B1	R413	A2
C415	B1	R113	B2	R450	B1	ZD103	B2
C416	B1	R114	B2	R451	B1	D402	A1
C417	B1	R115	B2	R452	A2	R414	B1
C418	B2	R116	B2	R453	B2	ZD104	B2
C419	A2	R117	B2	R454	B2	D403	B1
C420	A2	R118	B2	R455	B2	R417	A1
C427	B1	R404	B1	SEN3	A2		

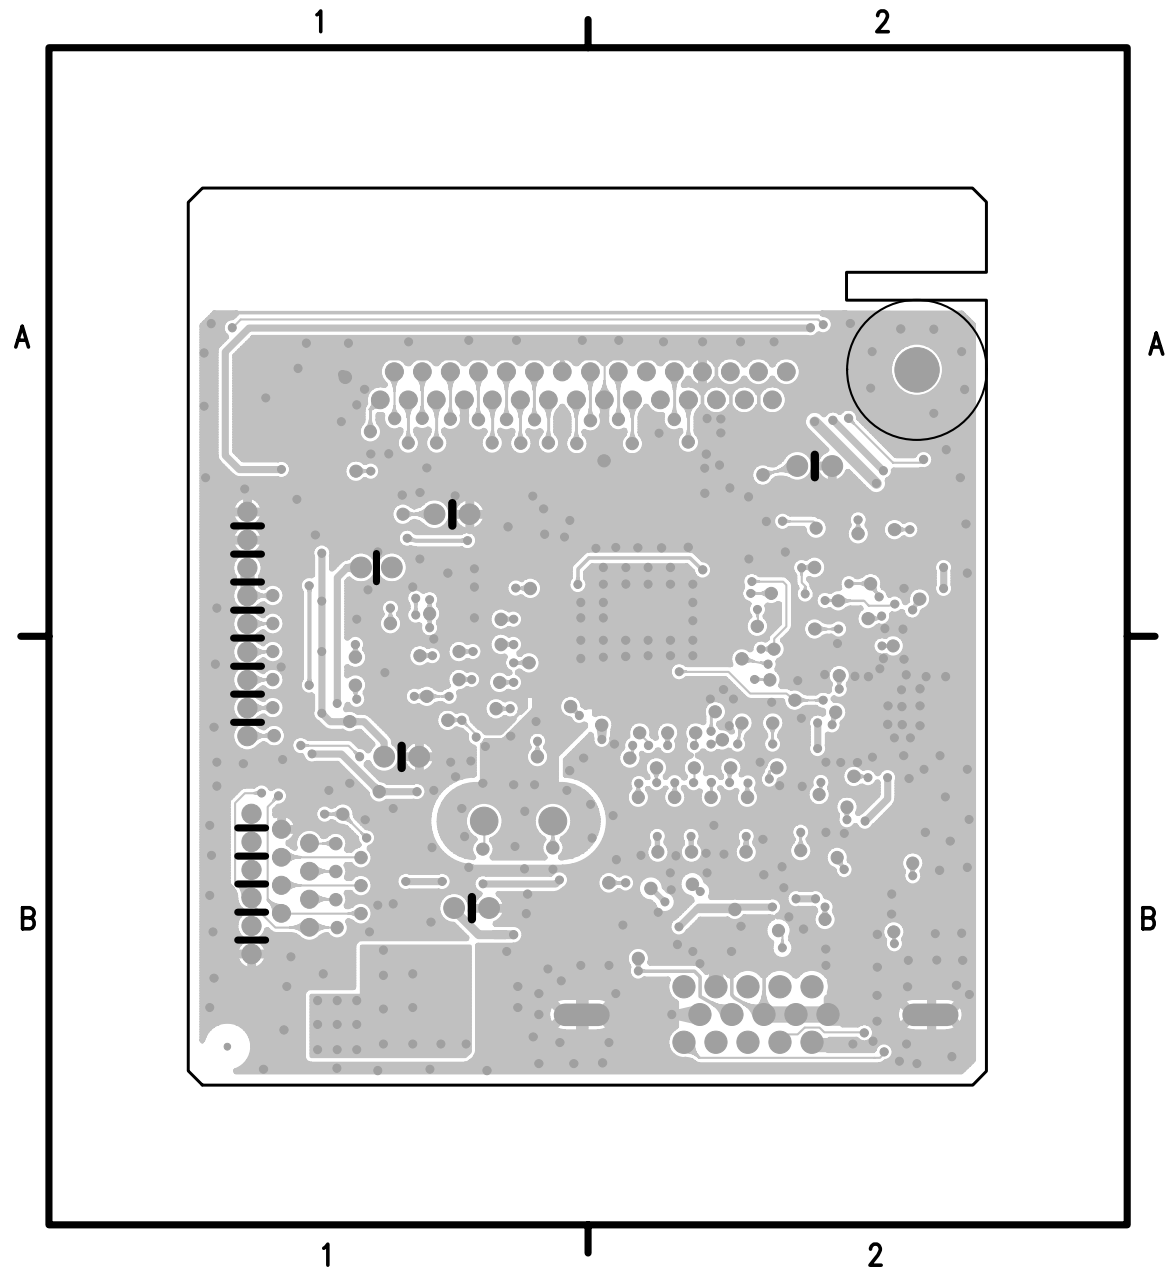


7.2 Power Board

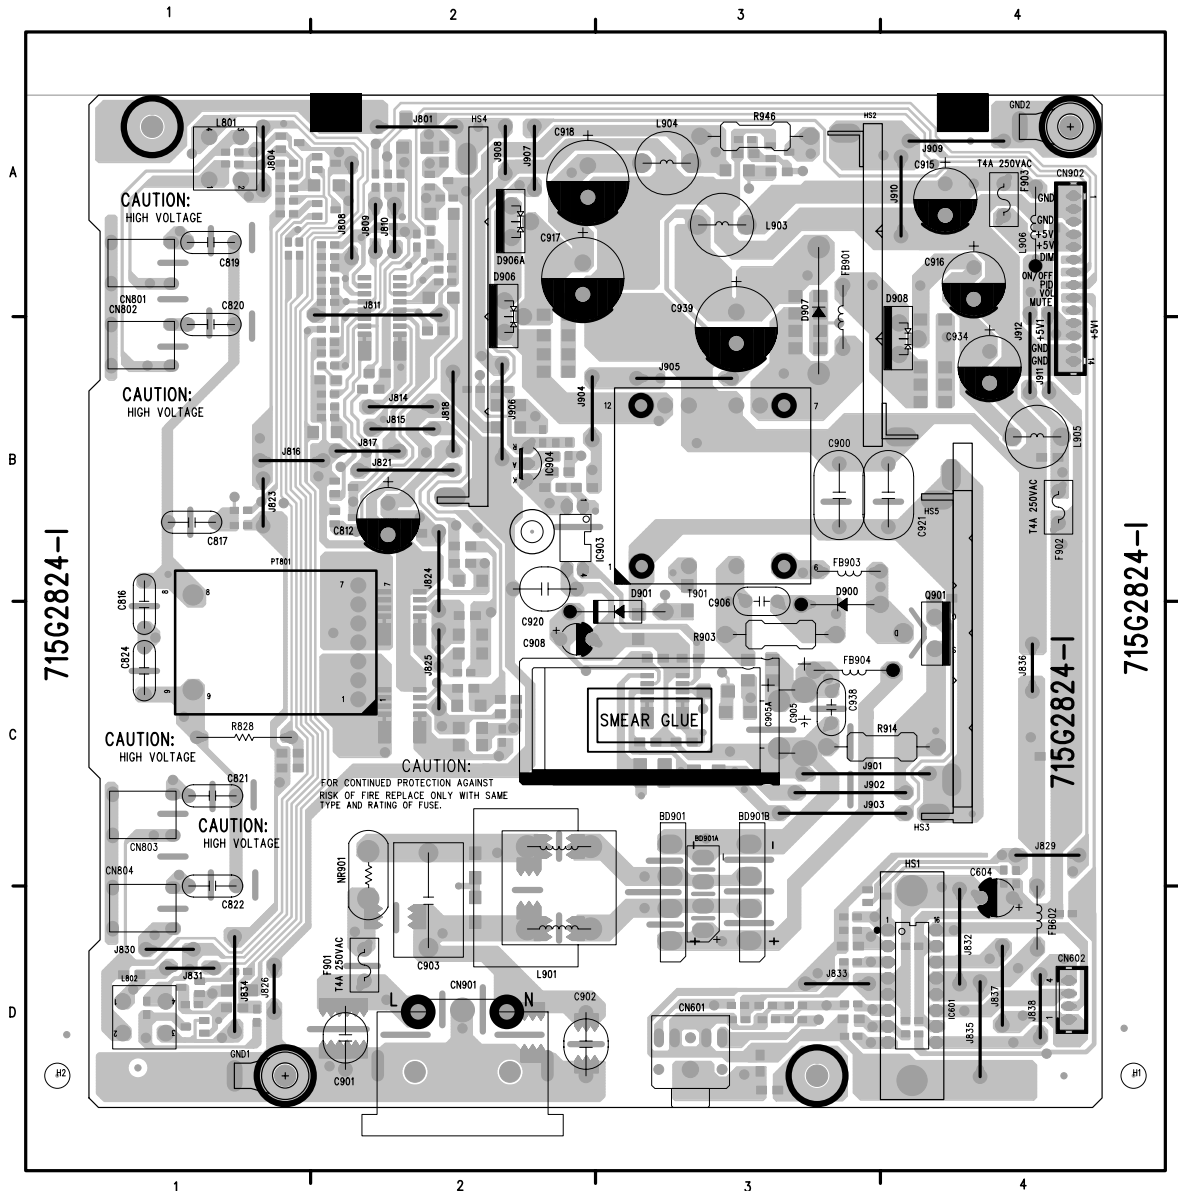715G2824-I




BD901	D3	J821	B2
BD901A	D3	J823	B1
BD901B	D3	J824	B2
C604	D4	J825	C2
C812	B2	J826	D1
C816	C1	J829	C4
C817	B1	J830	D1
C819	A1	J831	D1
C820	B1	J832	D4
C821	C1	J833	D3
C822	C1	J834	D1
C824	C1	J835	D4
C900	B3	J836	C4
C901	D2	J837	D4
C902	D2	J838	D4
C903	D2	J901	C4
C905	C3	J902	C3
C905A	C3	J903	C3
C906	B3	J904	B2
C908	C2	J905	B3
C915	A4	J906	B2
C916	A4	J907	A2
C917	A2	J908	A2
C918	A2	J909	A4
C920	B2	J910	A4
C921	B4	J911	B4
C934	B4	J912	B4
C938	C3	L801	A1
C939	B3	L802	D1
CN601	D3	L901	D2
CN602	D4	L903	A3
CN801	A1	L904	A3
CN802	B1	L905	B4

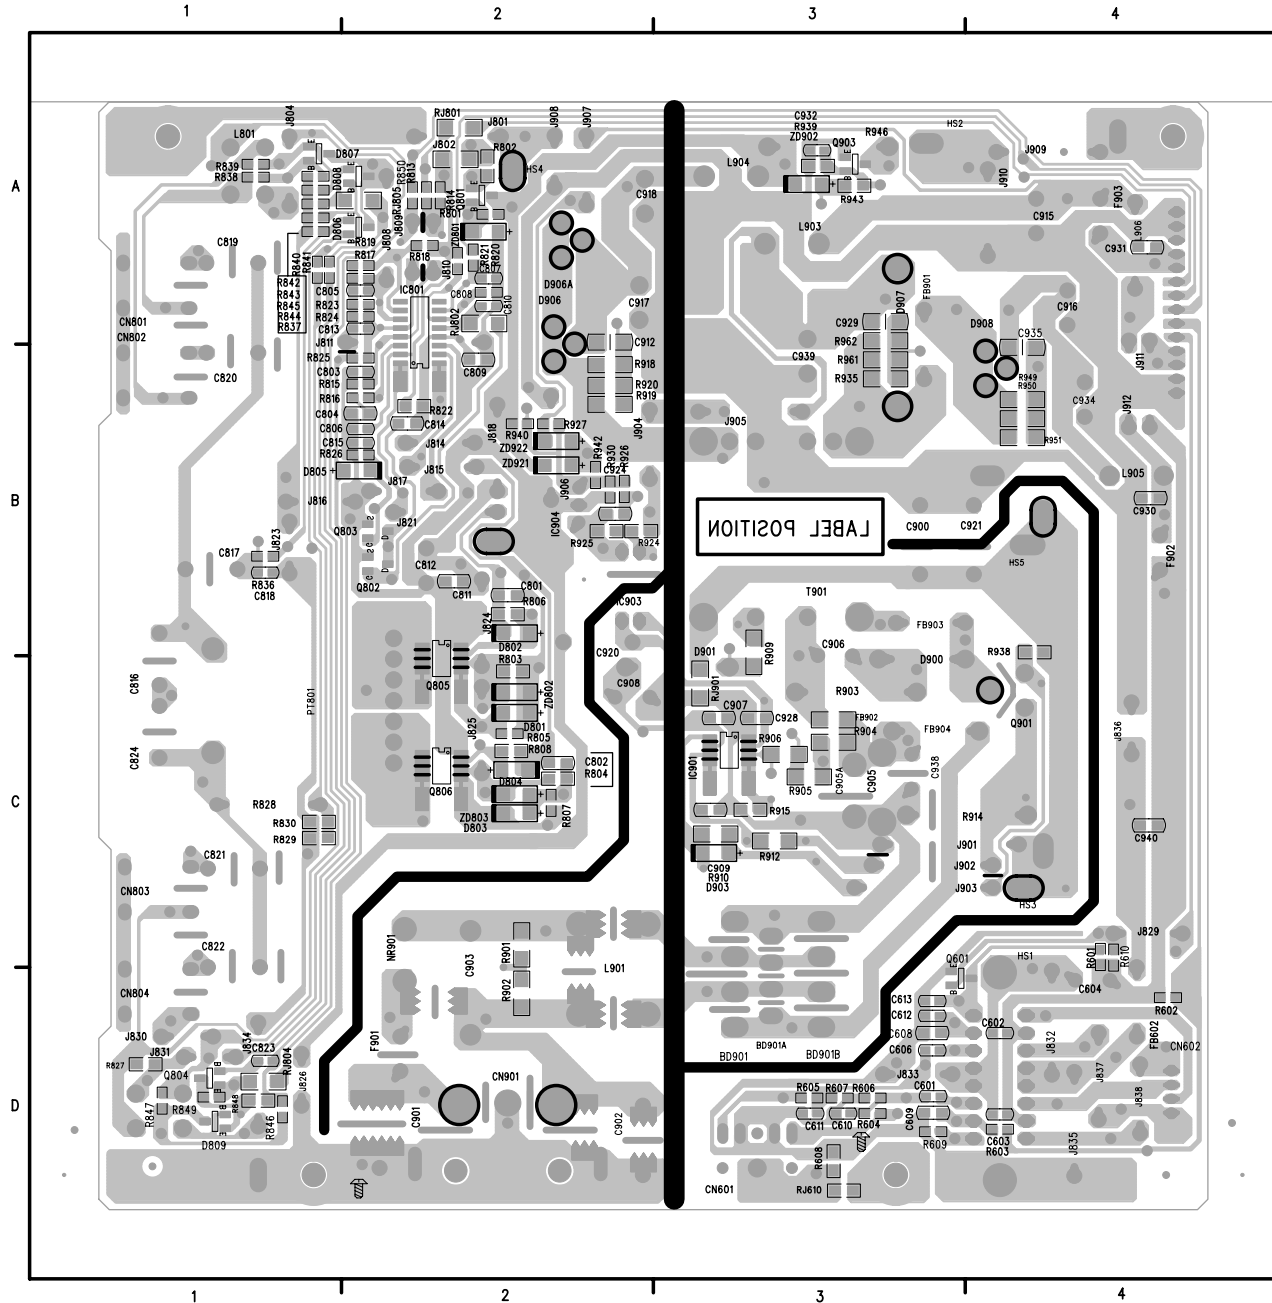


C601	D3	R818	A2	D805	B2	R926	B2
C602	D4	R819	A2	D806	A2	R927	B2
C603	D4	R820	A2	D807	A1	R930	B2
C606	D3	R821	A2	D808	A2	R935	B3
C608	D3	R822	B2	D809	D1	R938	B4
C609	D3	R823	A2	D903	C3	R939	A3
C610	D3	R824	A2	FB902	C3	R940	B2
C611	D3	R825	B2	IC801	B2	R942	B2
C612	D3	R826	B2	IC901	C3	R943	A3
C613	D3	R827	D1	J802	A2	R949	B4
C801	B2	R829	C1	Q601	D3	R950	B4
C802	C2	R830	C1	Q801	A2	R951	B4
C803	B2	R836	B1	Q802	B2	R961	B3
C804	B2	R837	A1	Q803	B2	R962	A3
C805	A2	R838	A1	Q804	D1	RJ610	D3
C806	B2	R839	A1	Q805	B2	RJ801	A2
C807	A2	R840	A1	Q806	C2	RJ802	A2
C808	A2	R841	A1	Q903	A3	RJ804	D1
C809	B2	R842	A1	R601	C4	RJ805	A2
C810	A2	R843	A1	R602	D4	RJ901	C3
C811	B2	R844	A1	R603	D4	SG12	=4
C813	A2	R845	A1	R604	D3	SG13	D2
C814	B2	R846	D1	R605	D3	SG14	D2
C815	B2	R847	D1	R606	D3	SG15	D2
C818	B1	R848	D1	R607	D3	SG16	D2
C823	D1	R849	D1	R608	D3	SG18	D1
C907	C3	R850	A2	R609	D3	SG19	D2
C909	C3	R901	C2	R610	C4	SG20	D2
C912	A2	R902	D2	R801	A2	SG21	D2
C924	B2	R904	C3	R802	A2	SG22	D2
C928	C3	R905	C3	R803	C2	SG23	D2
C929	A3	R906	C3	R804	C2	SG24	D2
C930	B4	R909	B3	R805	C2	SG25	D2
C931	A4	R910	C3	R806	B2	SG26	C2
C932	A3	R912	C3	R807	C2	SG27	C2
C935	B4	R915	C3	R808	C2	ZD801	A2
C940	C4	R918	B2	R813	A2	ZD802	C2
D801	C2	R919	B2	R814	A2	ZD803	C2
D802	B2	R920	B2	R815	B2	ZD902	A3
D803	C2	R924	B2	R816	B2	ZD921	B2
D804	C2	R925	B2	R817	A2	ZD922	B2

### 7.3 Key Board

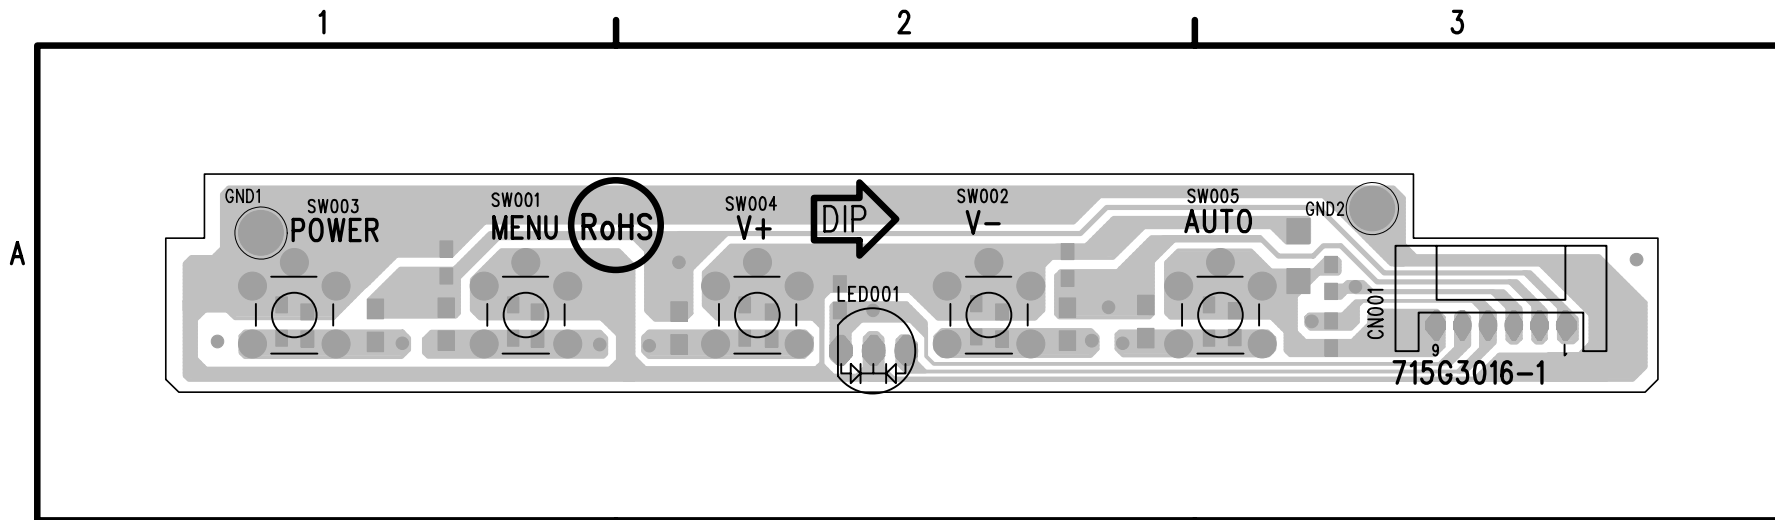715G3016-1




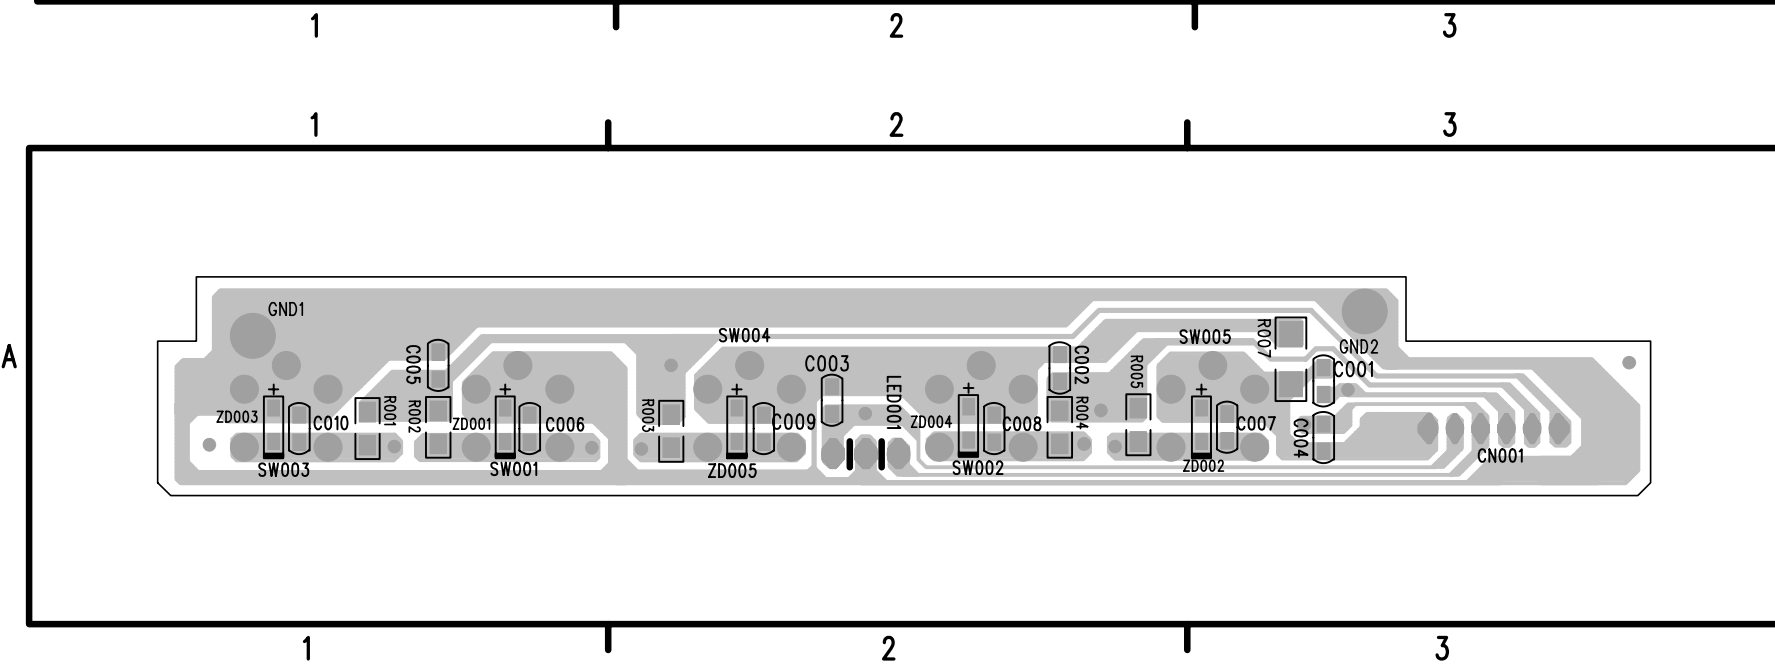- CN001 A3
- GND1 A1
- GND2 A3
- LED001 A2
- SW001 A1
- SW002 A2
- SW003 A1
- SW004 A2
- SW005 A3



- C001 A3
- C002 A2
- C003 A2
- C004 A3
- C005 A1
- C006 A1
- C007 A3
- C008 A2
- C009 A2
- C010 A1
- R001 A1
- R002 A1
- R003 A2
- R004 A2
- R005 A2
- R007 A3
- ZD001 A1
- ZD002 A3
- ZD003 A1
- ZD004 A2
- ZD005 A2

# 8. Wiring Diagram

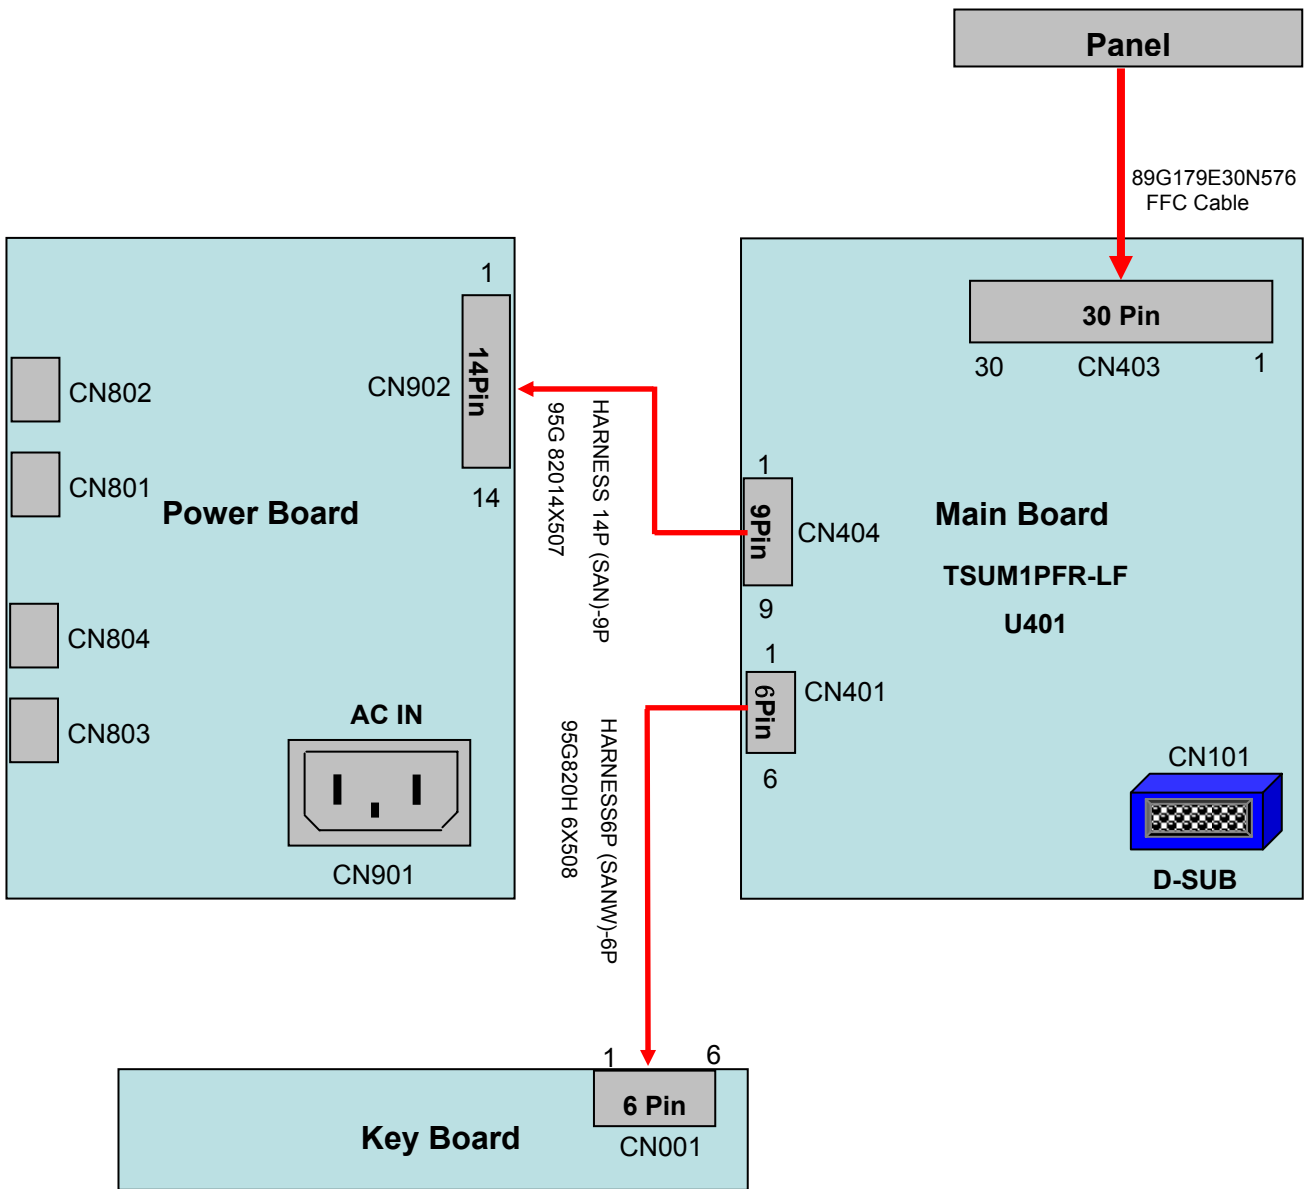







## 10. Mechanical Instructions

### 1. Back View as Fig1

Place the monitor face down on a smooth surface as Fig 1. Be careful to avoid scratch and injury during the uninstallation.



Fig1

### 2. Remove the hinge as Fig2.

Remove the three screws remarked in red to remove the hinge as Fig2.

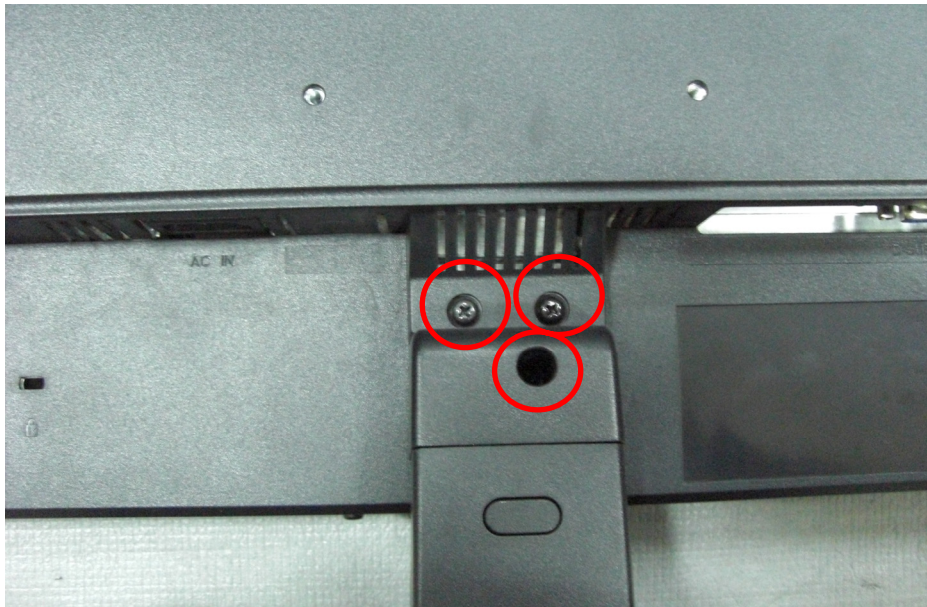


Fig2



3. Remove rear cover as Fig3~Fig7.



Fig3



Fig4



Fig5



Fig6



Fig7

4. Remove the bezel as Fig8.

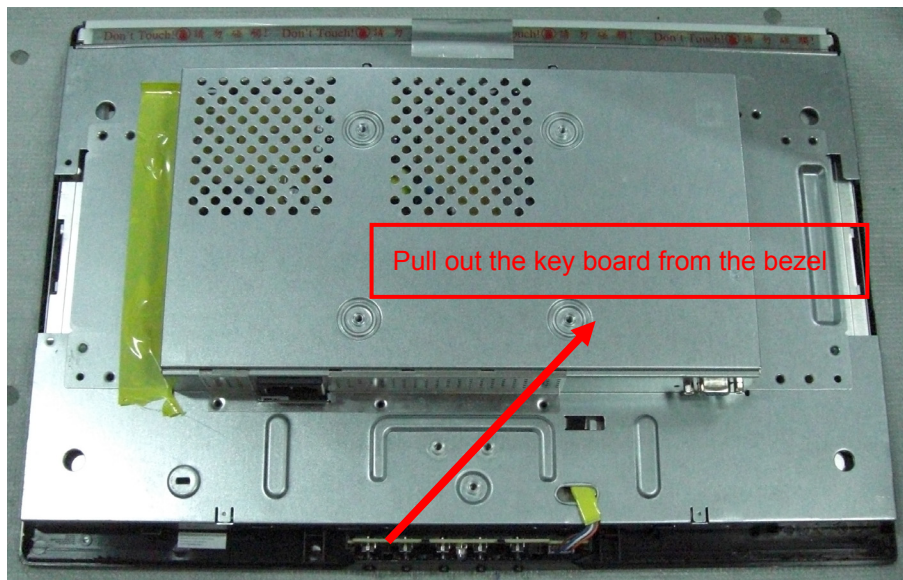


Fig8



5. Remove main frame cover as Fig9~Fig10.

- a. Remove the two screws marked in red as Fig9.
- b. Disconnect the four connector marked in blue as Fig9.
- c. Remove the two screws marked in red as Fig10.



Fig9



Fig10

6. Remove power board as Fig11.

- a. Remove the two screws marked in red as Fig11.
- b. Disconnect the connector marked in blue as Fig11.

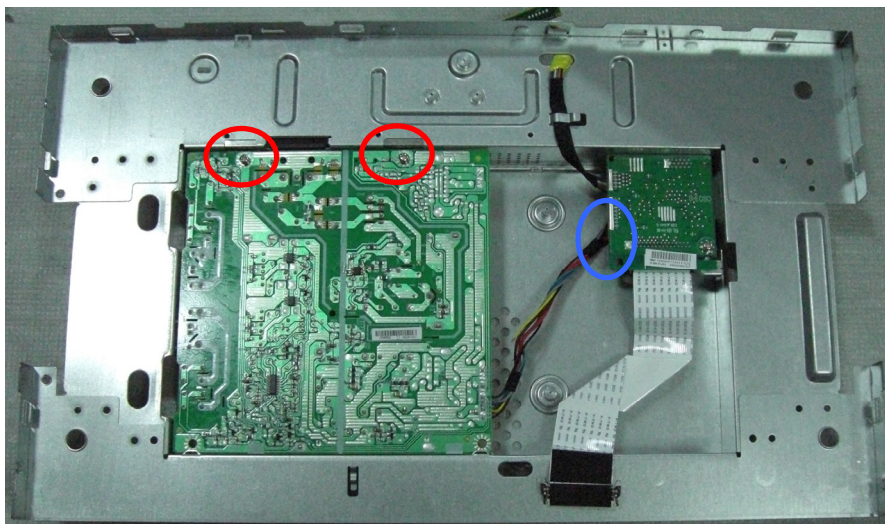


Fig11

**7. Remove scalar board as Fig12~Fig13.**

- a. Remove the screw remarked in red as Fig12.
- b. Disconnect the two connectors marked in blue as Fig12.
- c. Remove the two screws remarked in red as Fig13.

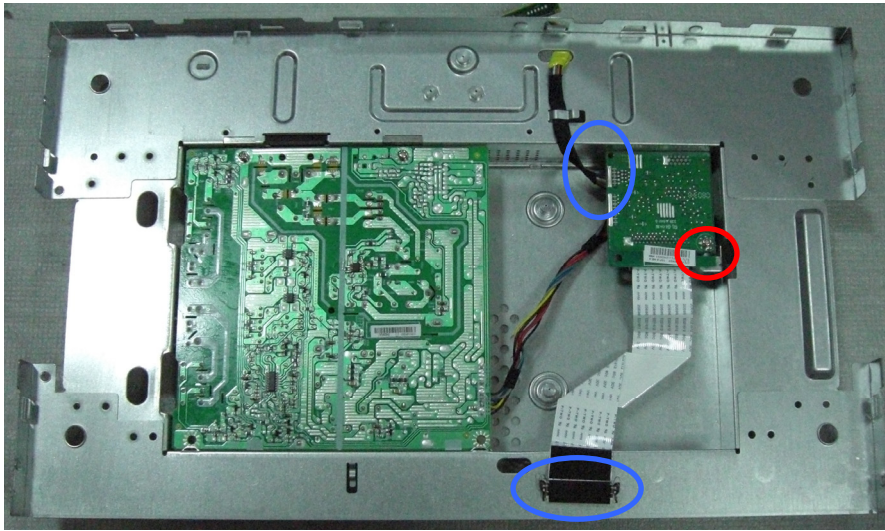


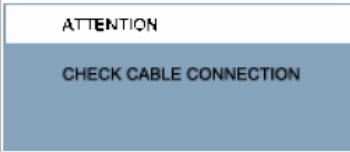
Fig12



Fig13

## 11. Trouble Shooting

This page deals with problems that can be corrected by a user. If the problem still persists after you have tried these solutions, contact Philips customer service representative.

Common Problems	
Having this problem	Check these items
No Picture (Power LED not lit)	<ul style="list-style-type: none"> <li>• Make sure the power cord is plugged into the power outlet and into the back of the monitor.</li> <li>• First, ensure that the power button on the front of the monitor is in the OFF position, then press it to the ON position.</li> </ul>
No Picture (Power LED is amber or yellow)	<ul style="list-style-type: none"> <li>• Make sure the computer is turned on.</li> <li>• Make sure the VGA cable is properly connected to your computer.</li> <li>• Check to see if the monitor cable has bent pins.</li> <li>• The Energy Saving feature may be activated</li> </ul>
Screen says 	<ul style="list-style-type: none"> <li>• Make sure the monitor cable is properly connected to your computer. (Also refer to the Quick Set-Up Guide).</li> <li>• Check to see if the monitor cable has bent pins.</li> <li>• Make sure the computer is turned on.</li> </ul>
AUTO button not working properly	<ul style="list-style-type: none"> <li>• The Auto Function is designed for use on standard Macintosh or IBM-compatible PCs running Microsoft Windows.</li> <li>• It may not work properly if using nonstandard PC or video card.</li> </ul>
Imaging Problems	
Display position is incorrect	<ul style="list-style-type: none"> <li>• Press the Auto button.</li> <li>• Adjust the image position using the Phase/Clock of More Settings in OSD Main Controls.</li> </ul>
Image vibrates on the screen	<ul style="list-style-type: none"> <li>• Check that the VGA cable is properly connected to the graphics board or PC.</li> </ul>



Vertical flicker appears



- Press the Auto button.
- Eliminate the vertical bars using the Phase/Clock of More Settings in OSD Main Controls.

Horizontal flicker appears



- Press the Auto button.
- Eliminate the vertical bars using the Phase/Clock of More Settings in OSD Main Controls.

The screen is too bright or too dark

- Adjust the contrast and brightness on On-Screen Display. (The backlight of the LCD monitor has a fixed life span. When the screen becomes dark or begins to flicker, please contact your sales representative).

An after-image appears

- If an image remains on the screen for an extended period of time, it may be imprinted in the screen and leave an after-image. This usually disappears after a few hours

An after-image remains after the power has been turned off.

- This is characteristic of liquid crystal and is not caused by a malfunction or deterioration of the liquid crystal. The after-image will disappear after a period of time.

Green, red, blue, dark, and white dots remains

- The remaining dots are normal characteristic of the liquid crystal used in today's technology.

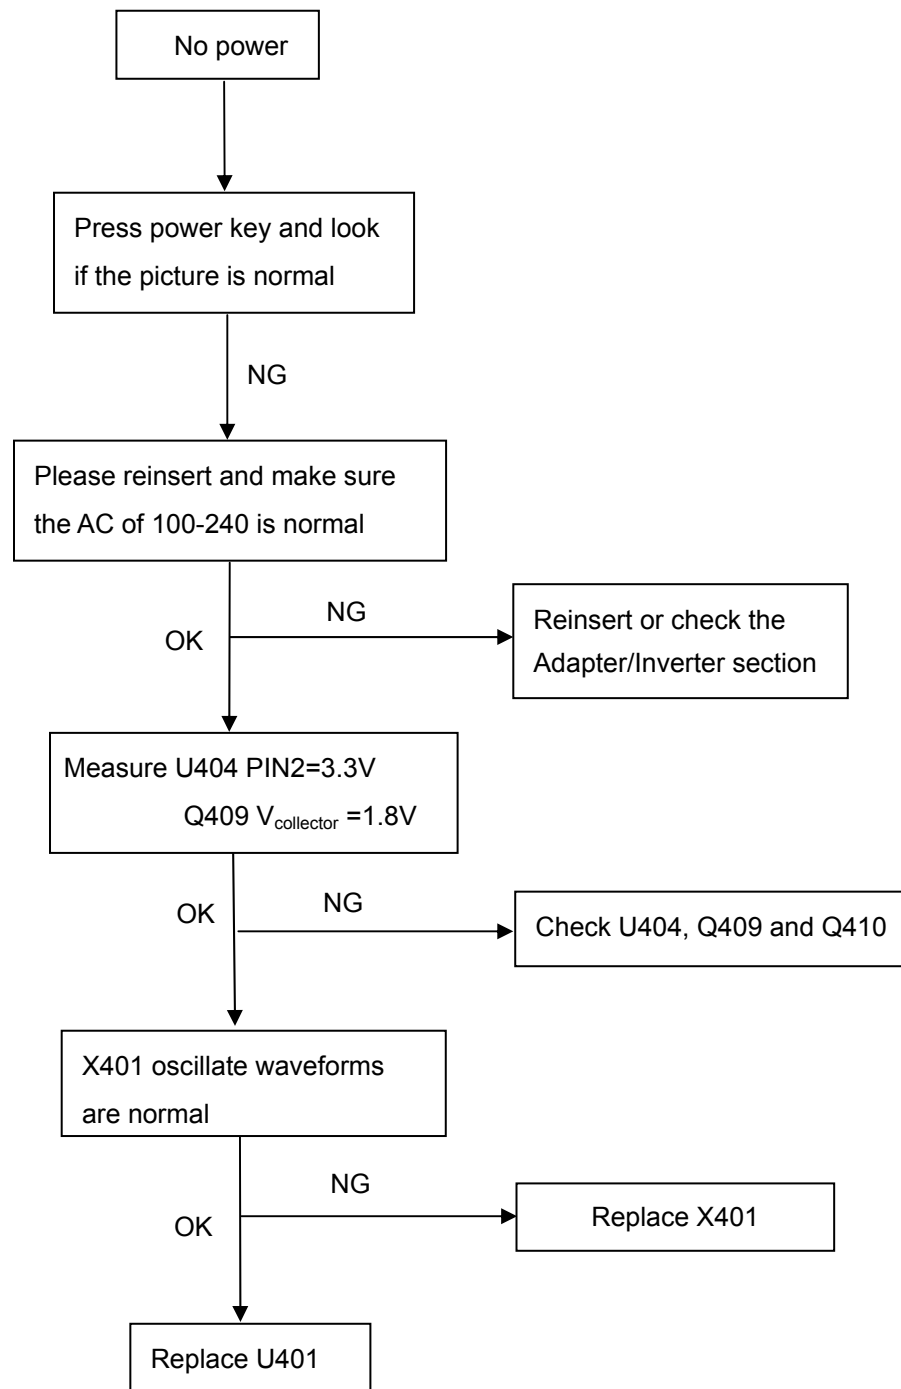
For further assistance, refer to the [Consumer Information Centers](#) list and contact Philips customer service representative.

[RETURN TO TOP OF THE PAGE](#)


## 12. Repair Flow Chart

### 12.1 Main Board

#### (1). No Power




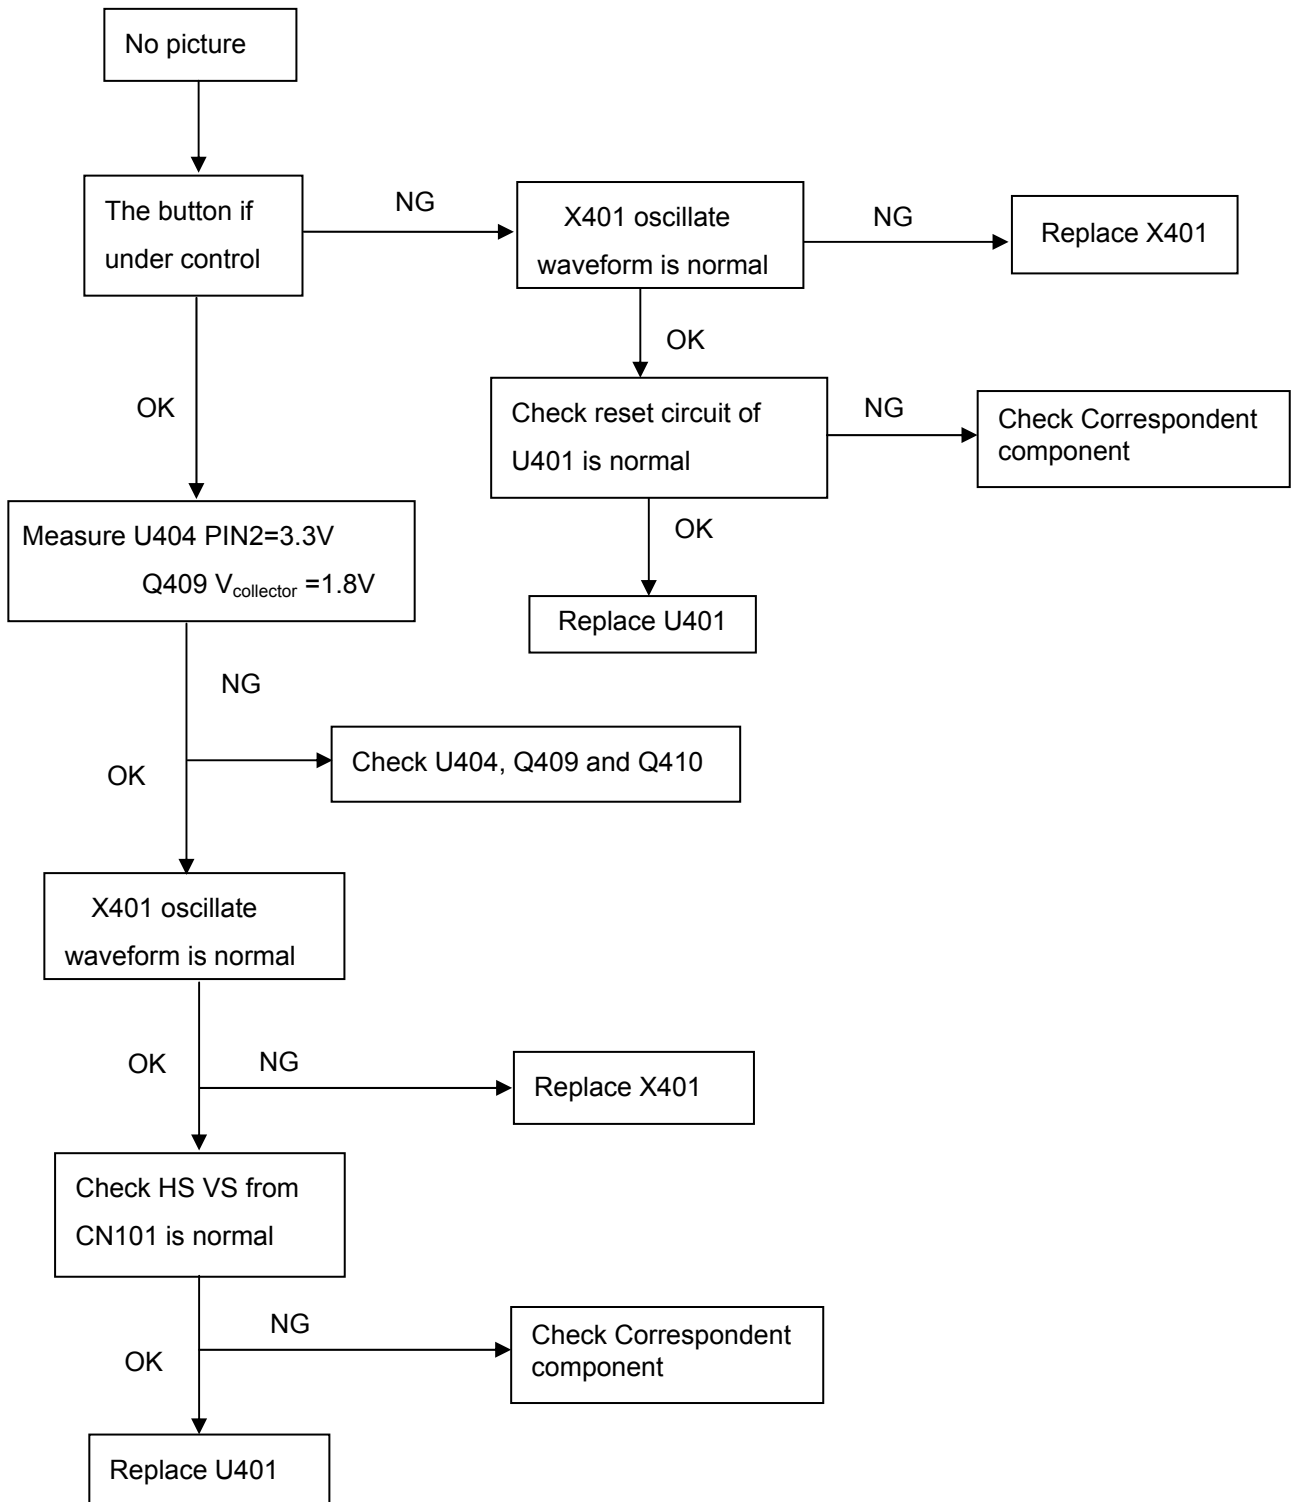(2). No Picture






## (3). White screen

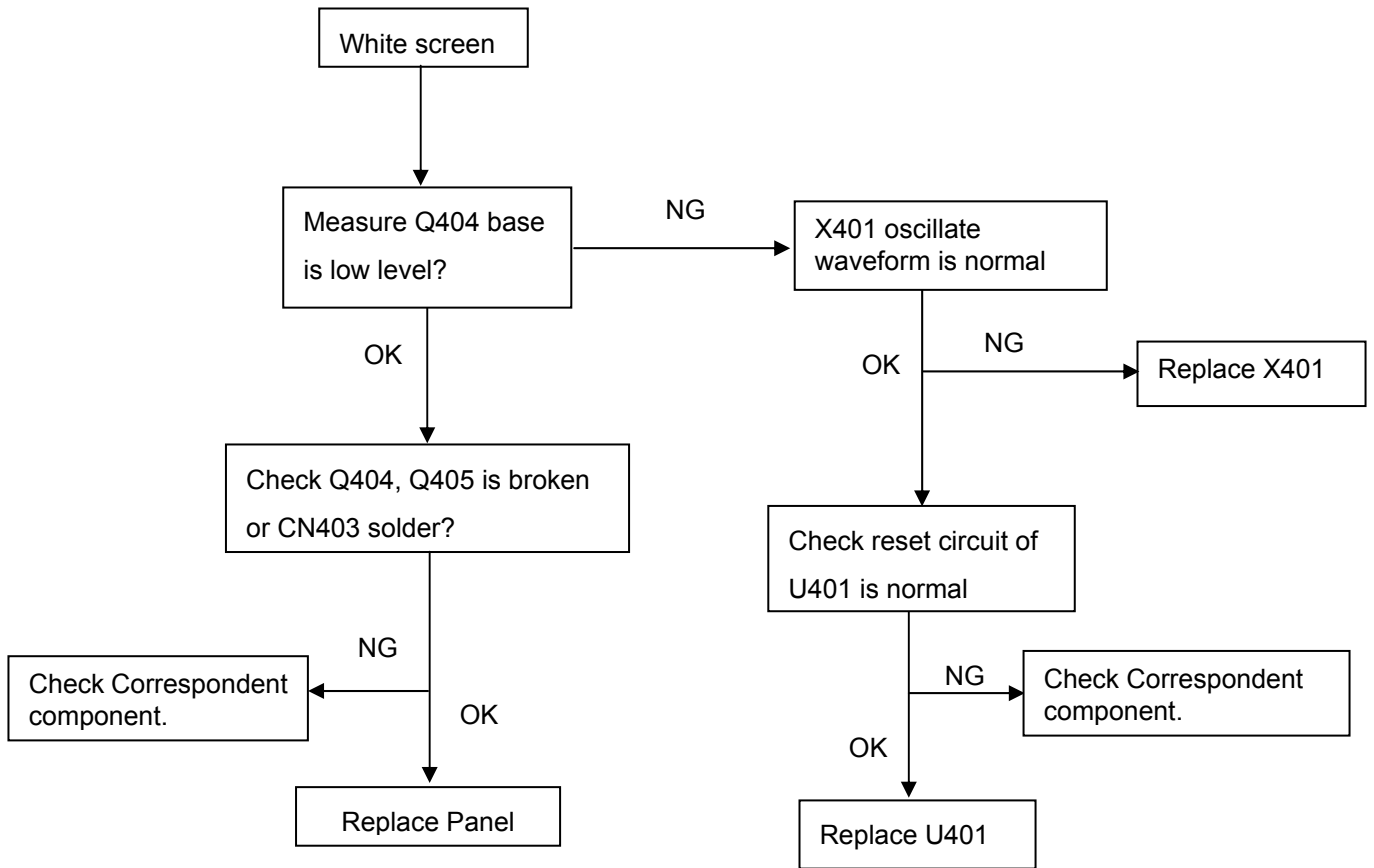


## 11.2. Power/Inverter Board

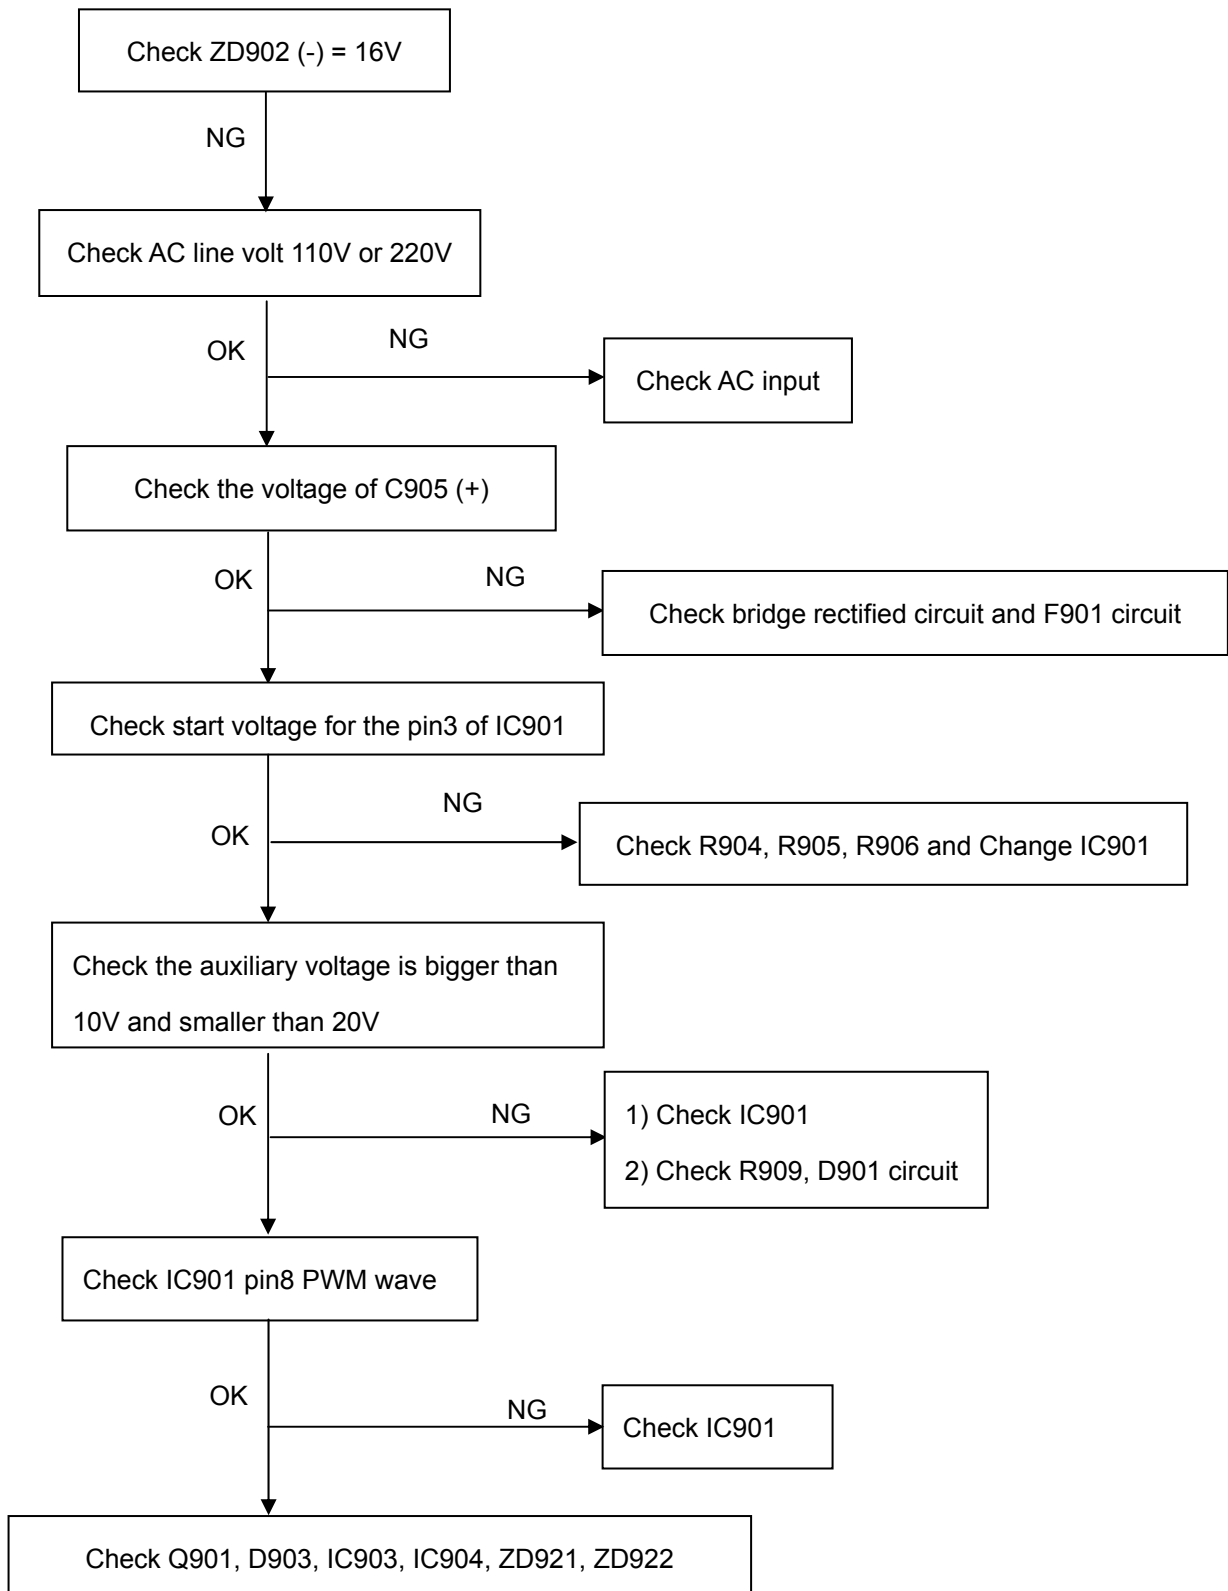
## (1) No power



## (2) W / LED, No Backlight

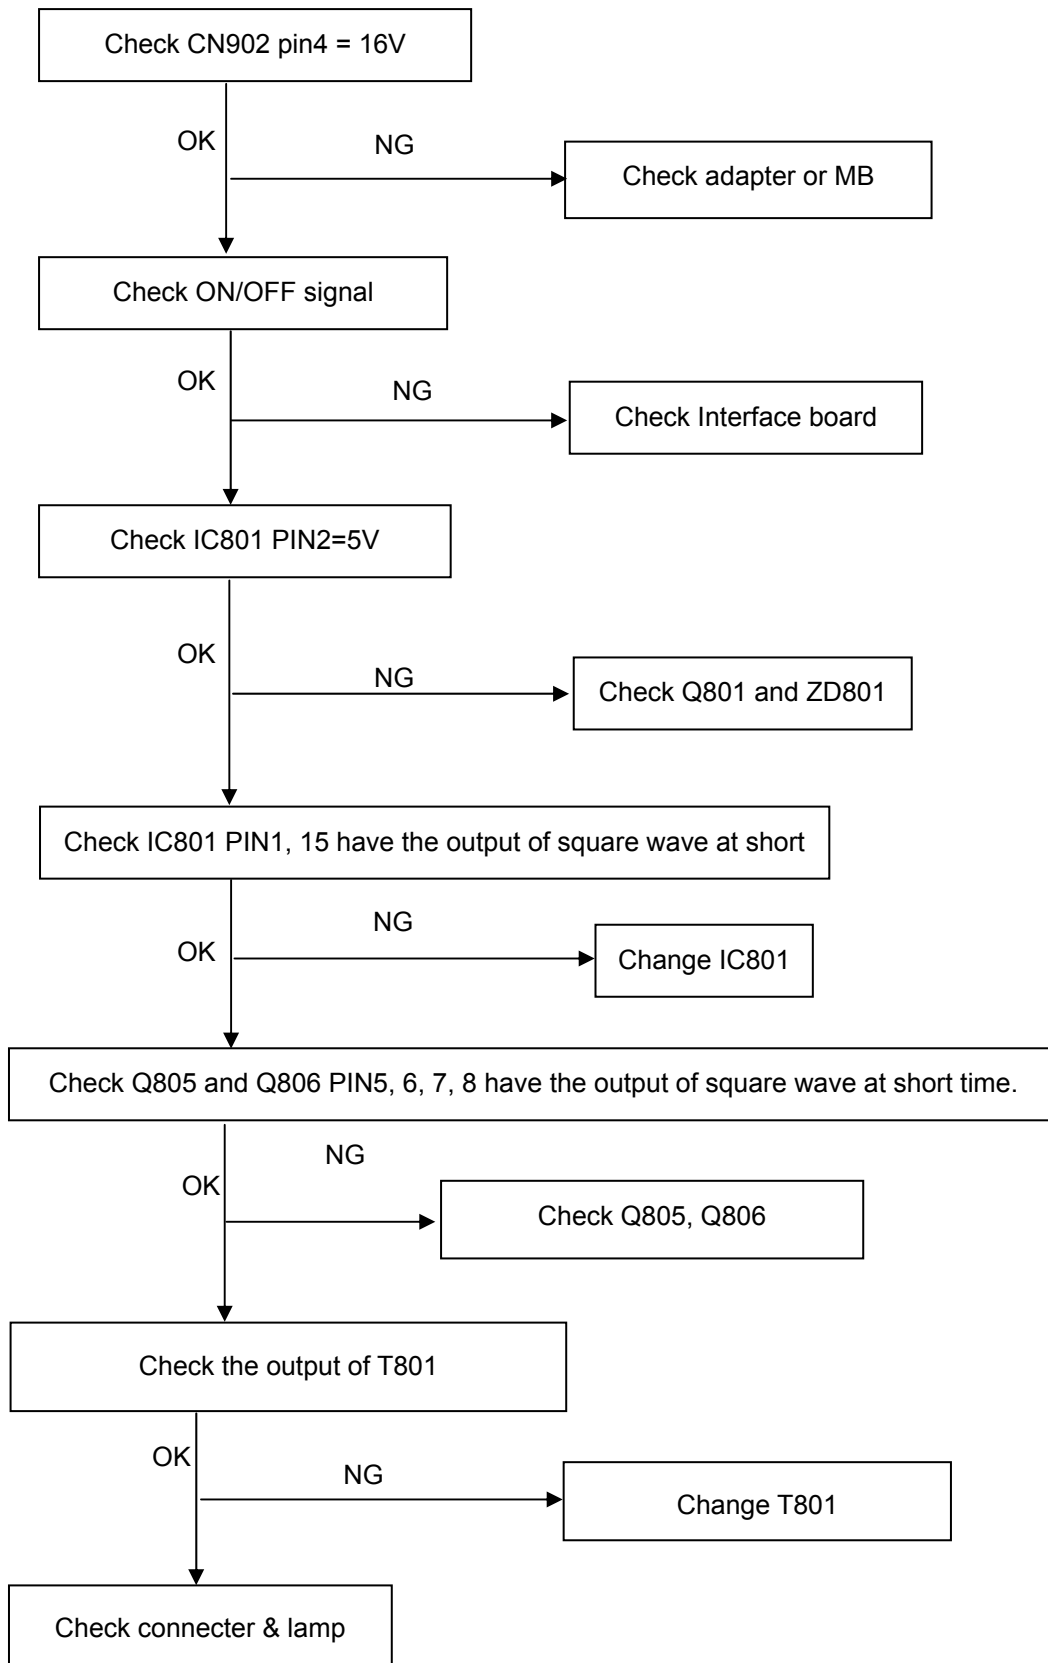

## 12.3 Key Board

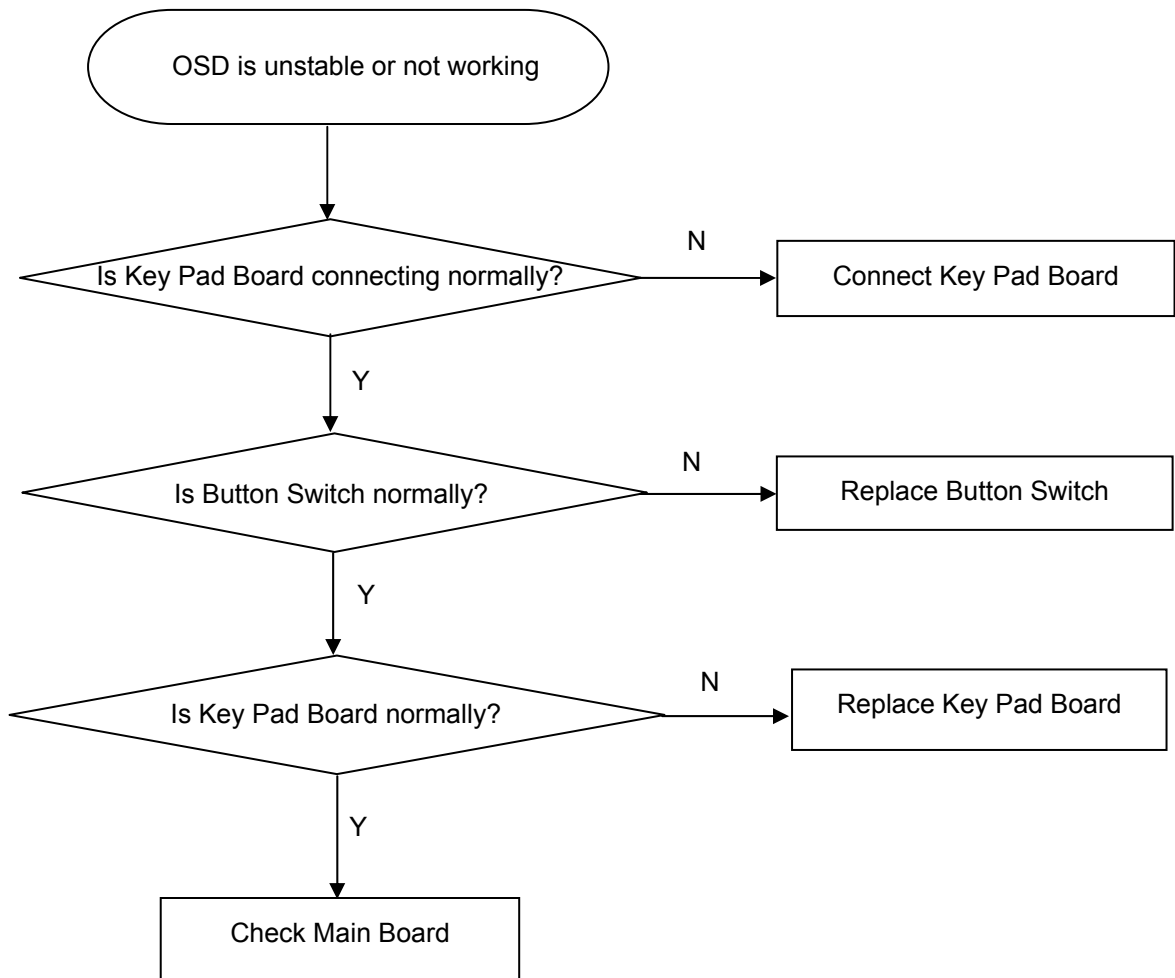

## 13. ISP Instruction


### 1. When do the part, need the tools as follow:

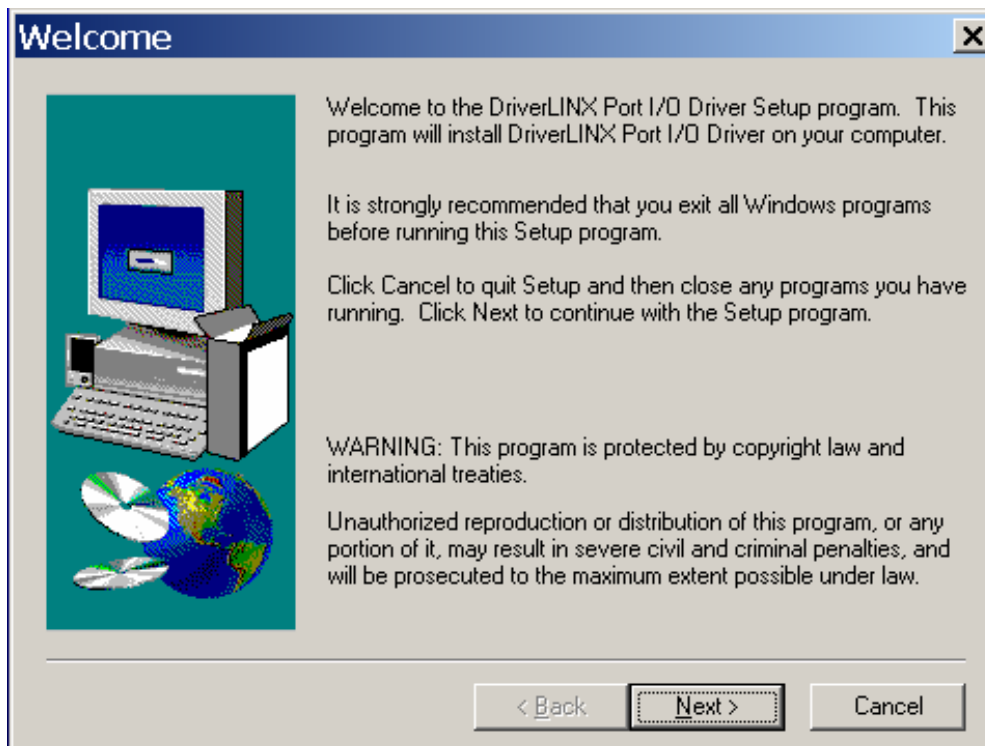
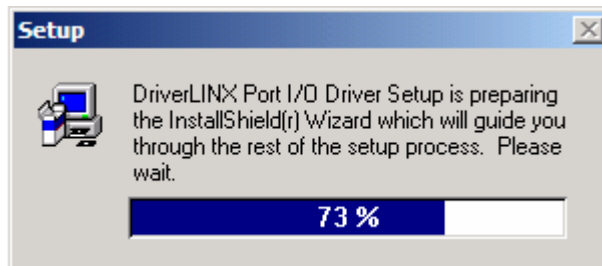

- a. An i486 (or above) personal computer or compatible.
- b. Microsoft operation system Windows 95/98/2000/XP.
- c. "PORT95NT.exe" program
- d. Software ISP SN Alignment kits

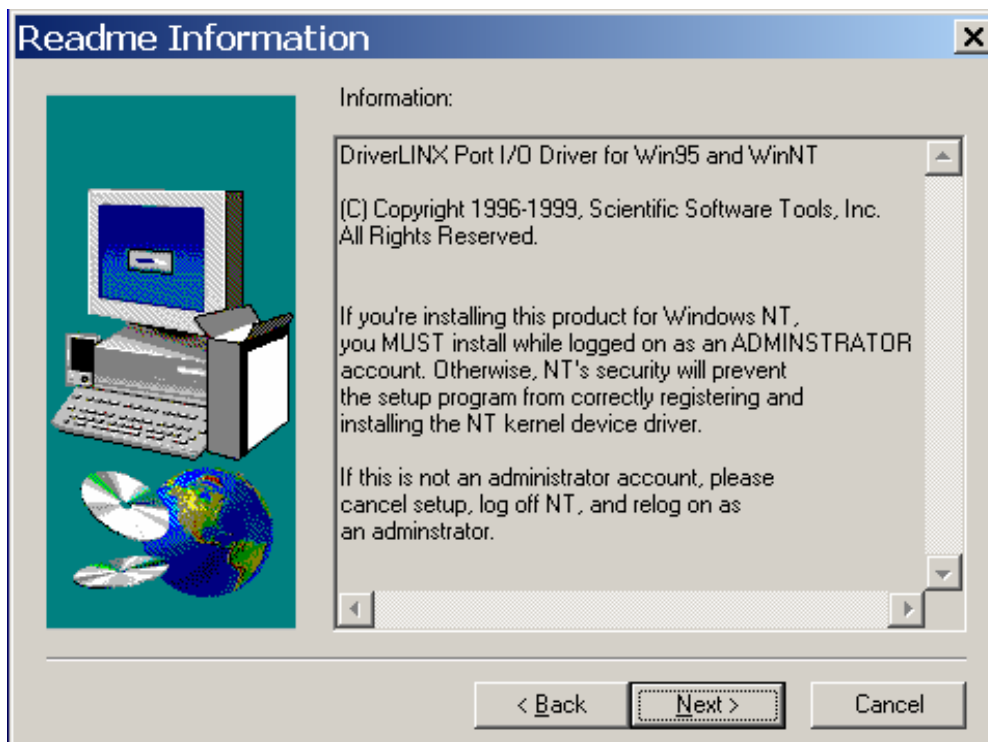
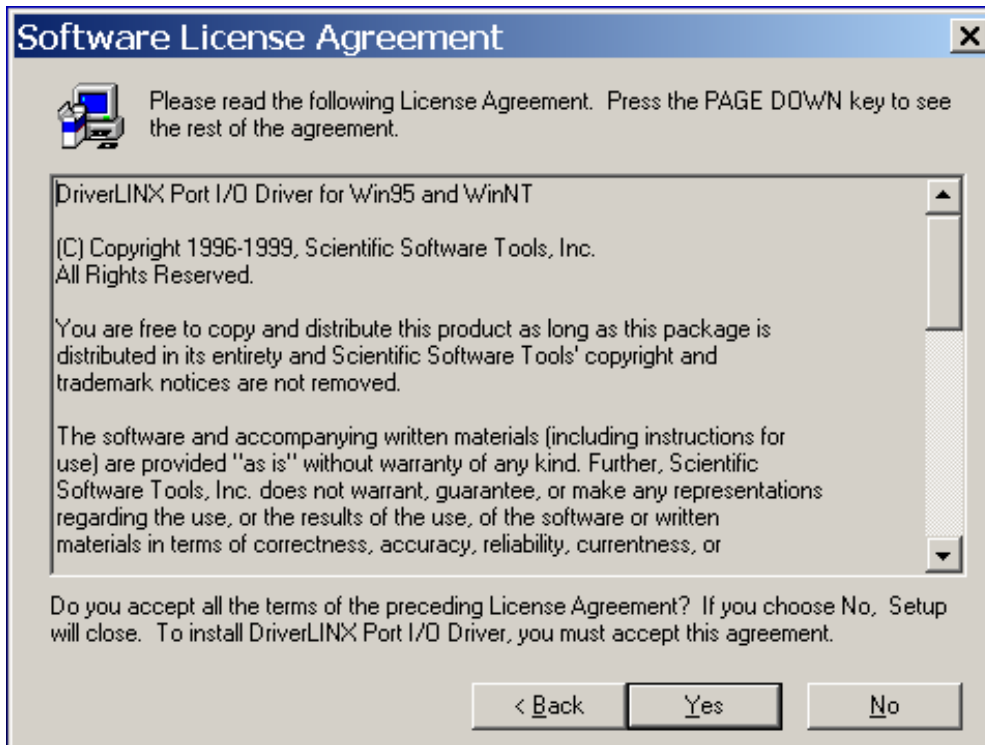
The kit contents:

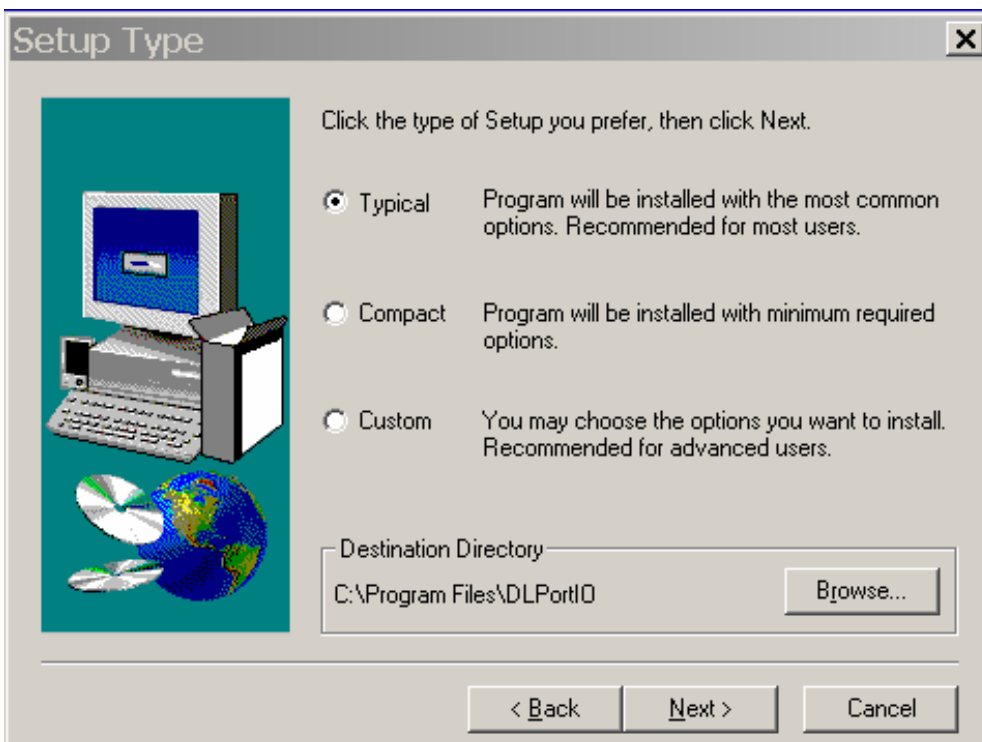
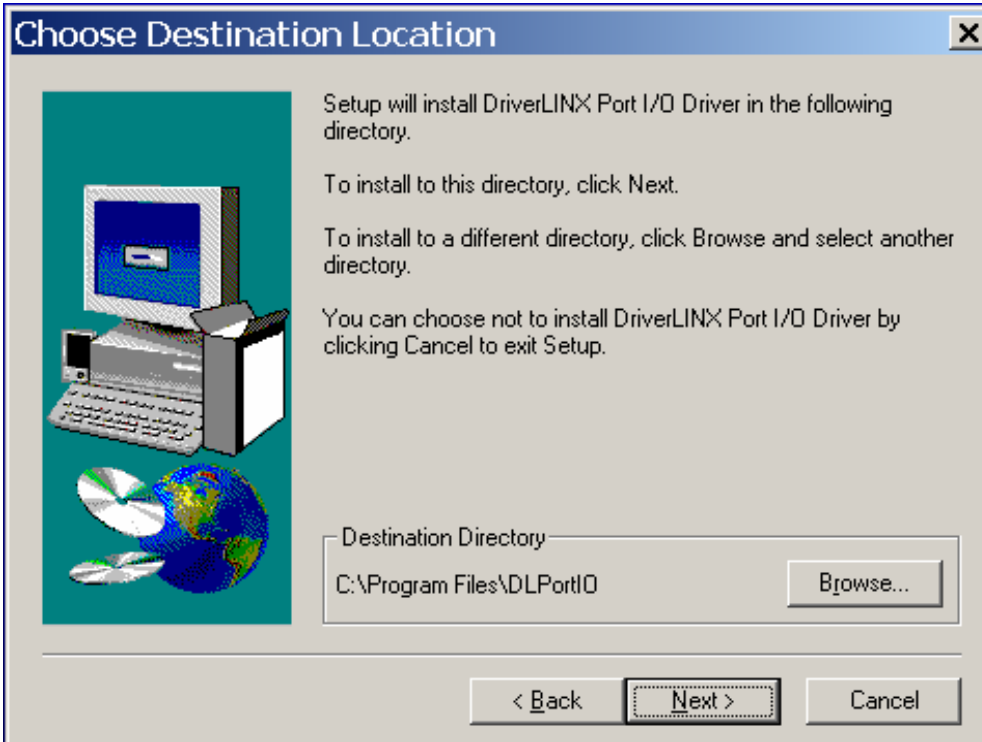
- a. ISP BOARD x1
- b. Printer cablex1
- c. VGA cable x1

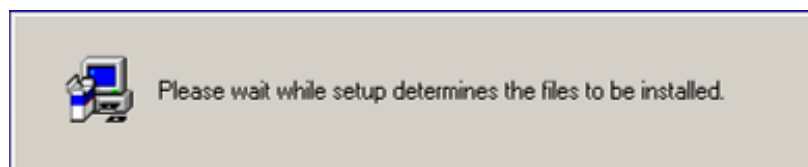
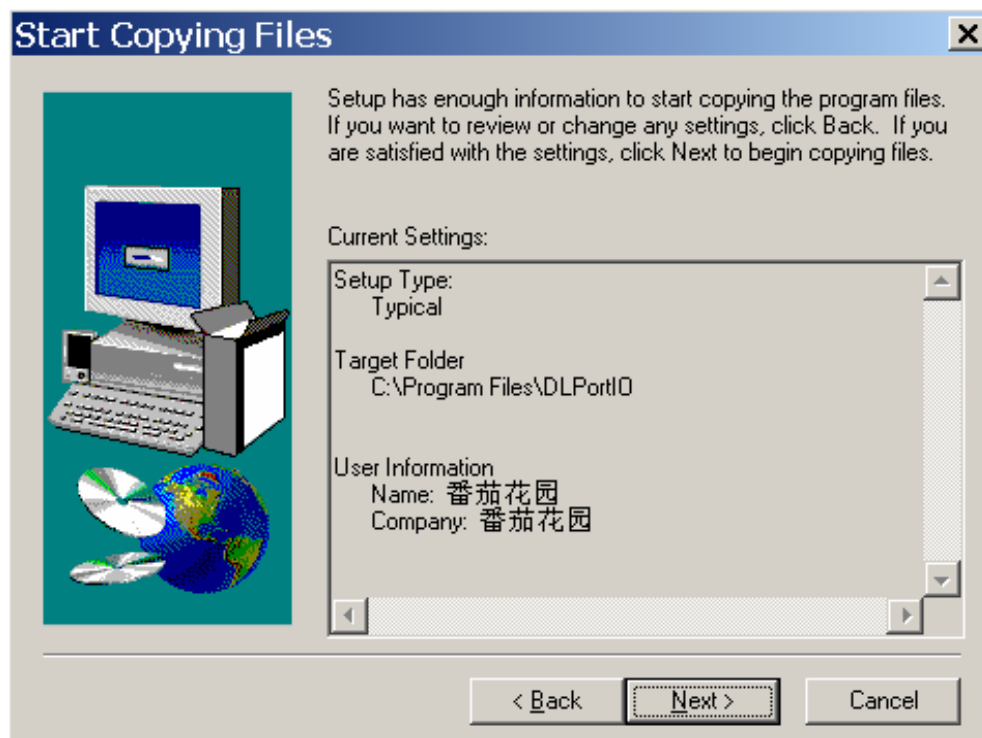
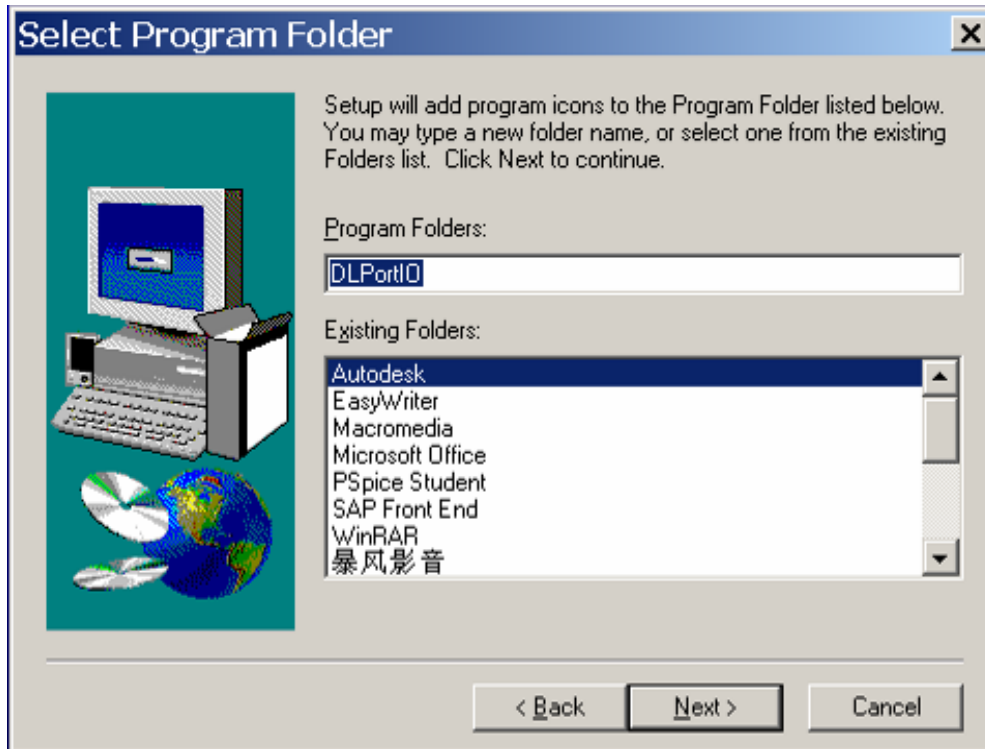
### 2. Install the "PORT95NT.EXE", and restart the computer.


You must install the  at the first. The processing as follows:











Click  to complete the installation.



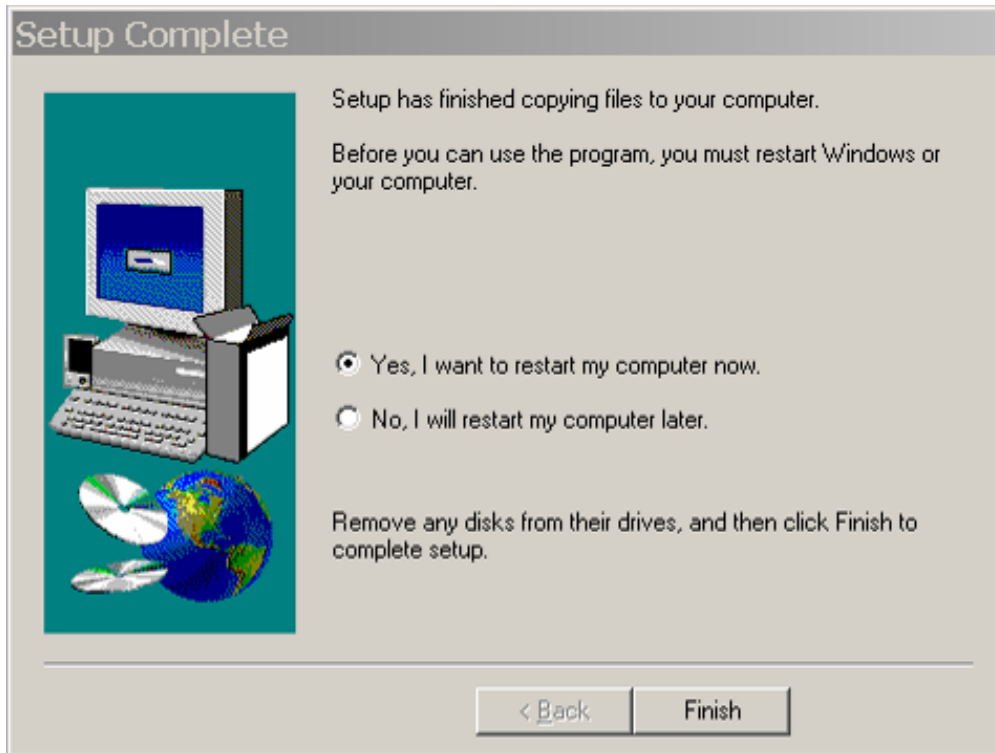



**Note:** After installation, you must restart the PC to take the setup to effect.


### 3. Connect the ISP board as follow:

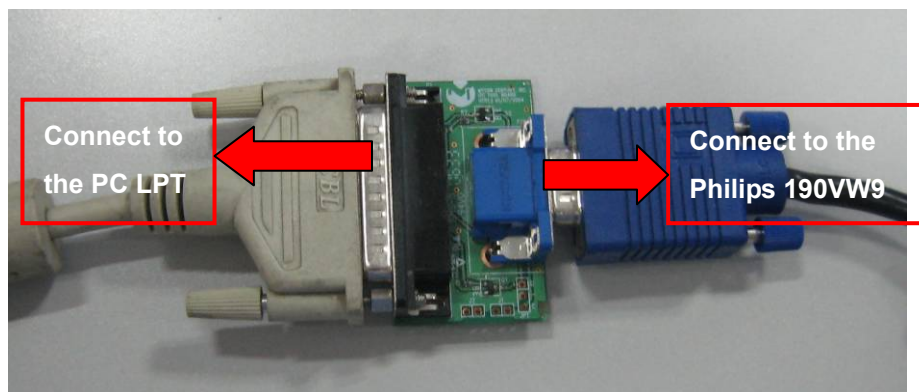

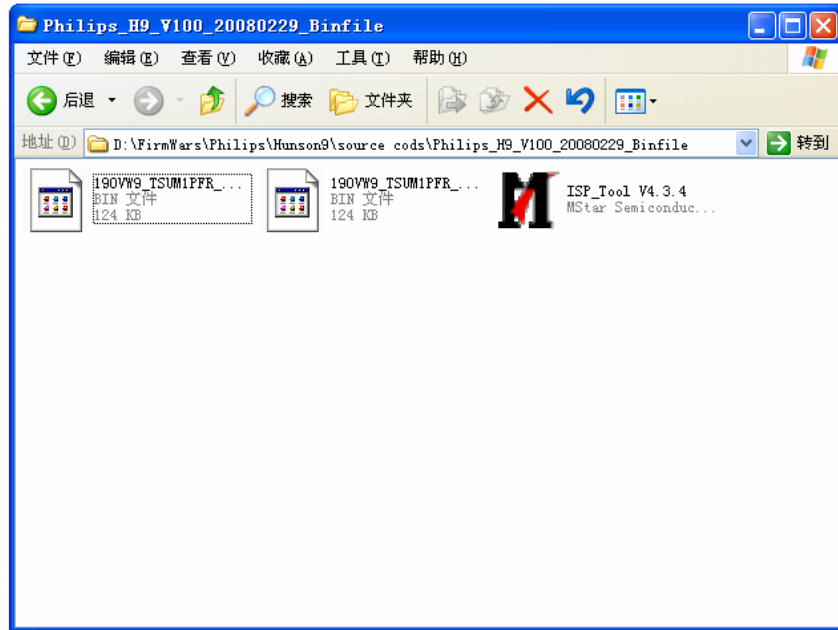
4. The process of ISP write is as follows.



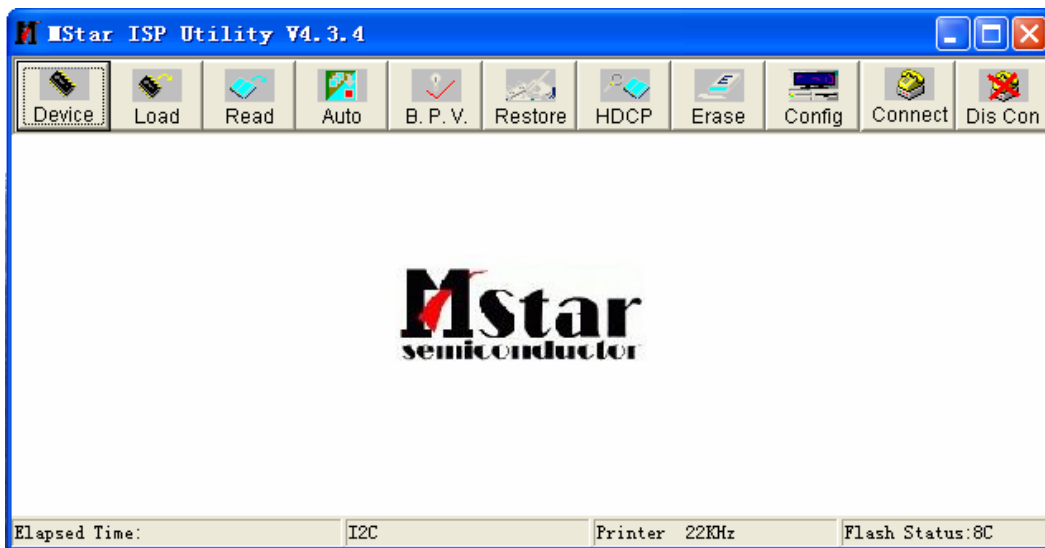a. Double-click  , running the program as follows:





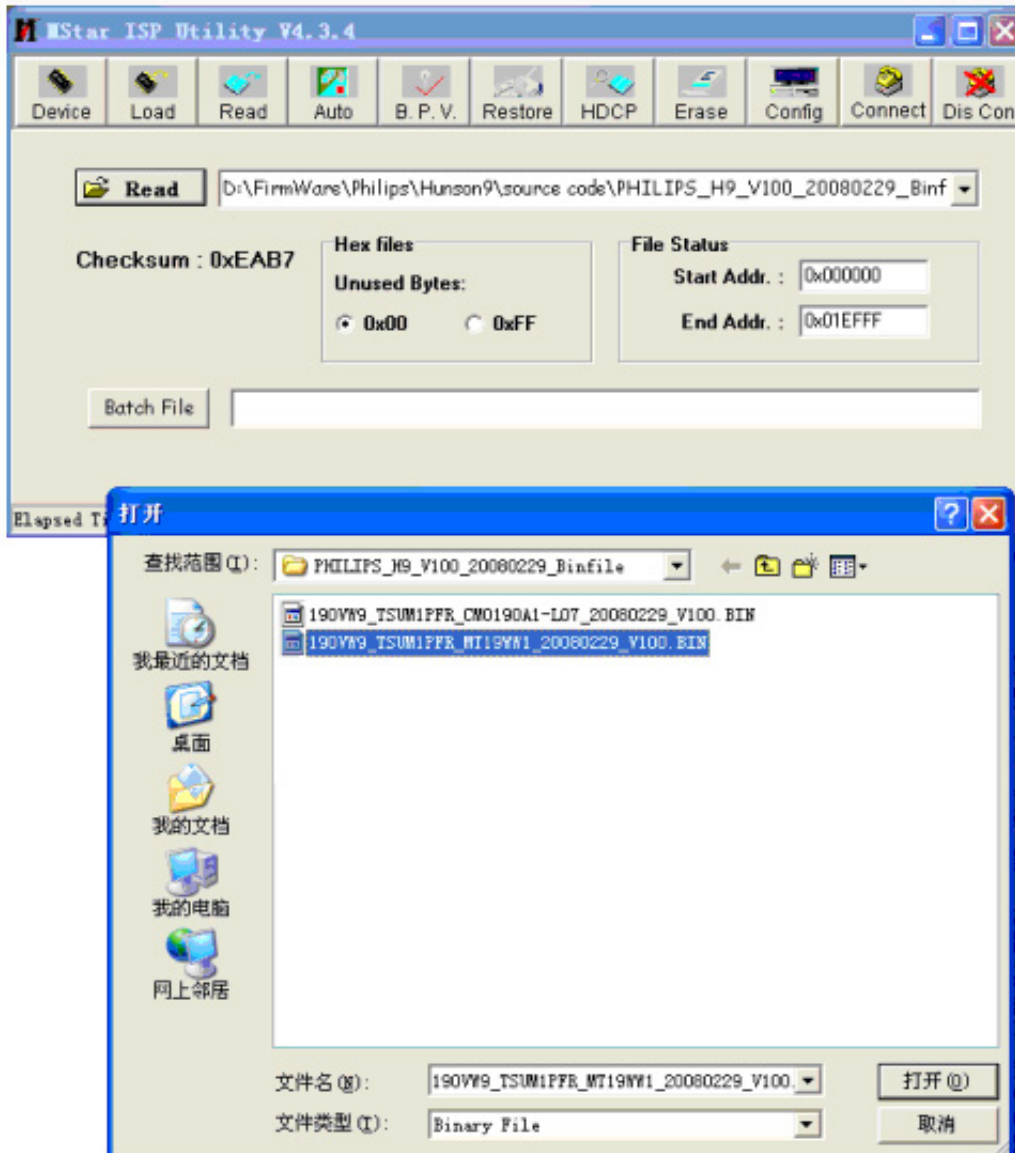b. Click  icon, search the program "190VW9\_TSUM1PFR\_MT19WW1\_20080229\_V100", and click **open**:





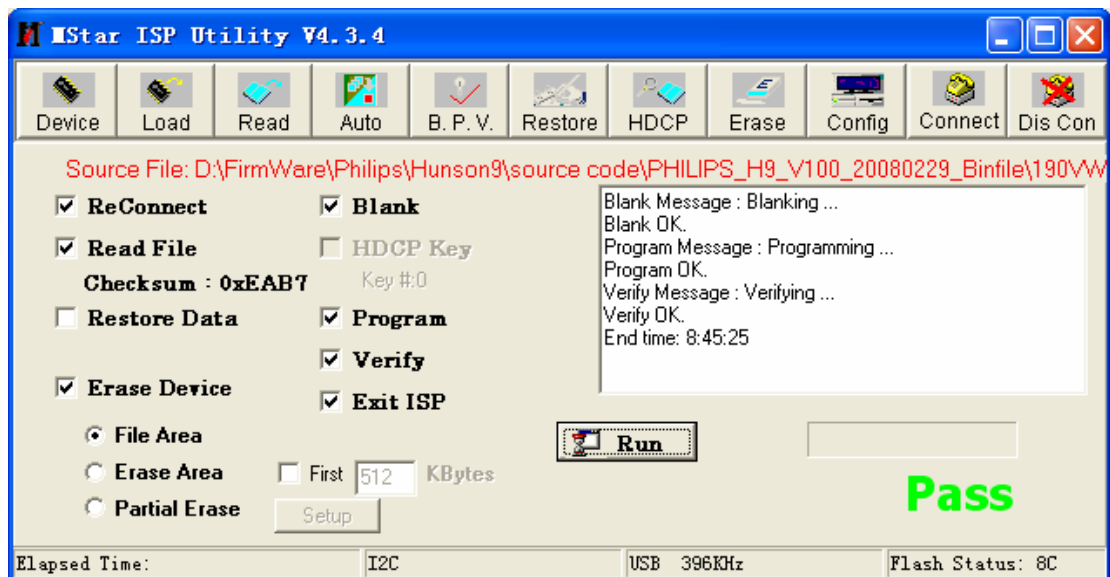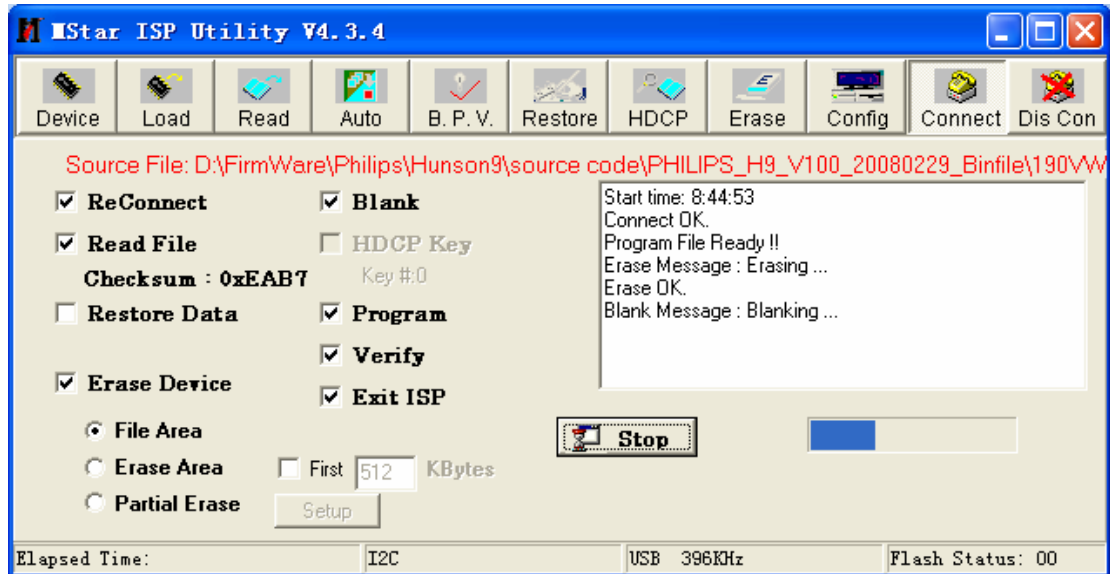c. Click **Connect** icon, it will auto run. If burn in success, it will show as the follow picture:



## 14. DDC Instruction

### General

#### DDC Data Re-programming

In case the main EEPROM with Software DDC which store all factory settings were replaced because a defect, repaired monitor' the serial numbers have to be re-programmed.

It is advised to re- soldered the main EEPROM with Software DDC from the old board onto the new board if circuit board have been replaced, in this case the DDC data does not need to be re-programmed.

Additional information about DDC (Display Data Channel) may be obtained from Video Electronics Standards Association (VESA). Extended Display Identification Data (EDID) information may be also obtained from VESA.

1. An i486 (or above) personal computer or compatible.
2. Microsoft operation system Windows 95/98/2000/XP.
3. " PORT95NT.exe, WinDDC\_ setup" program.
4. Software OSD SN Alignment kits

The kit contents:

- a. OSD SN BOARD x1
- b. Printer cable x1
- c. VGA cable x1
- d. Digital cable x1
- e. 12V DC power source

#### **1. Install the "PORT95NT.EXE", and restart the computer.**

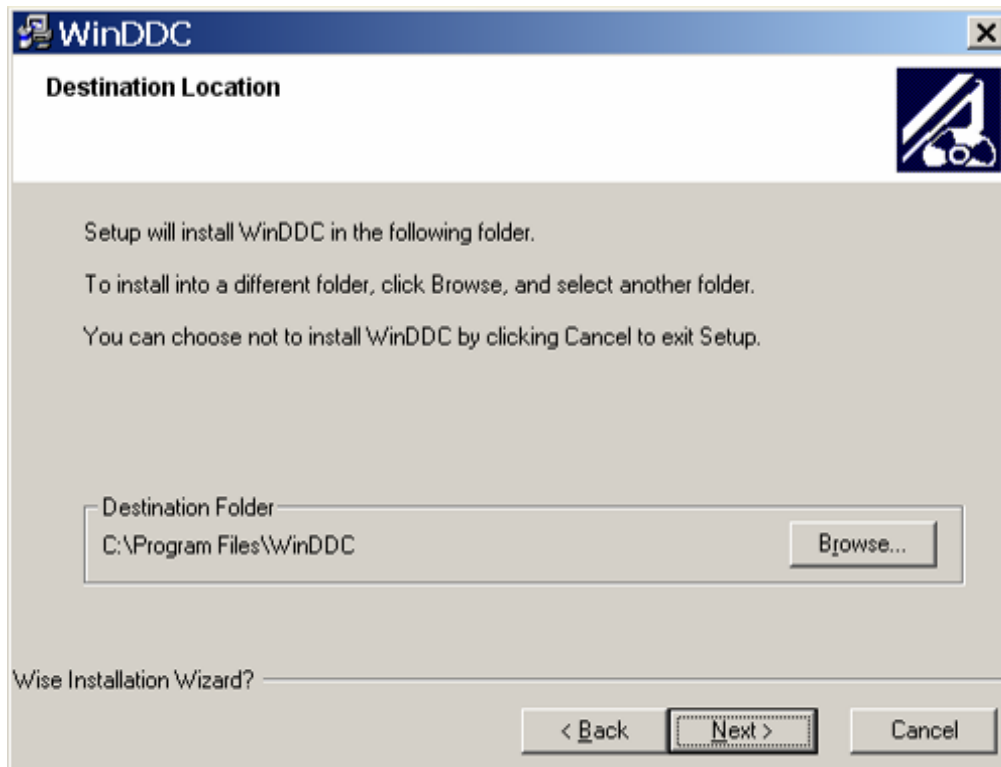
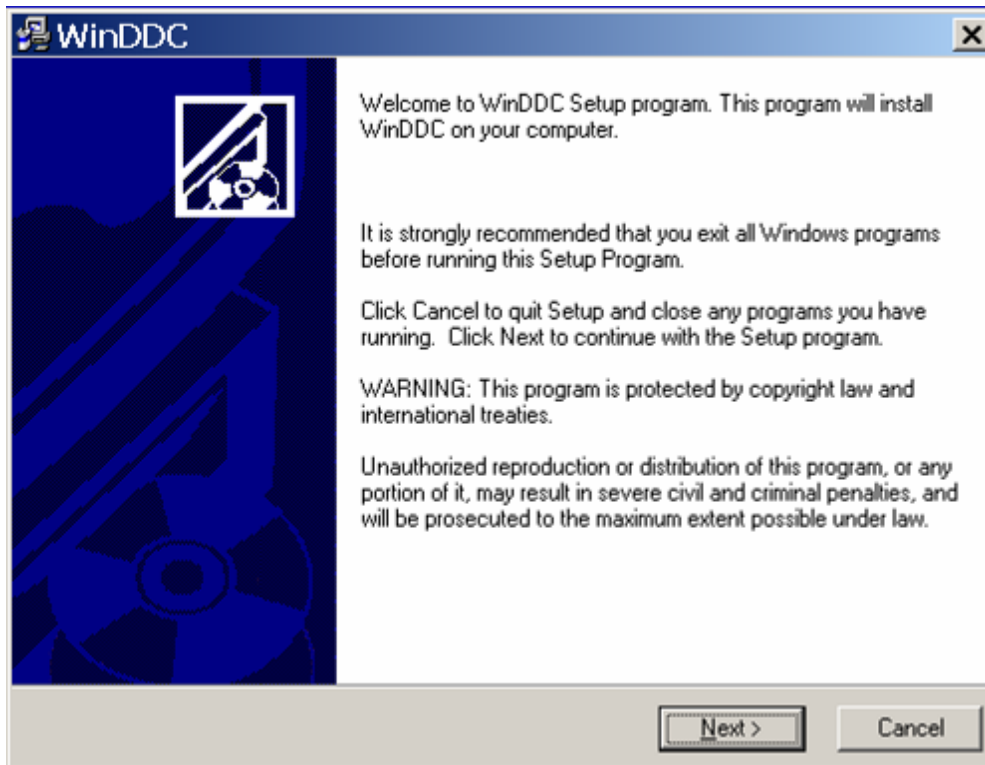
The process of installing "PORT95NT" has been specified in Item12, so it will not be specified again. If you have any problem, please read it in Item12.

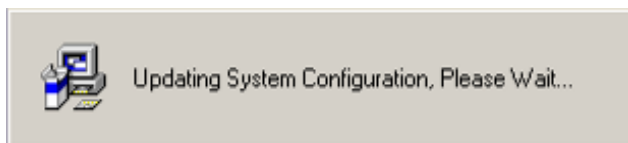
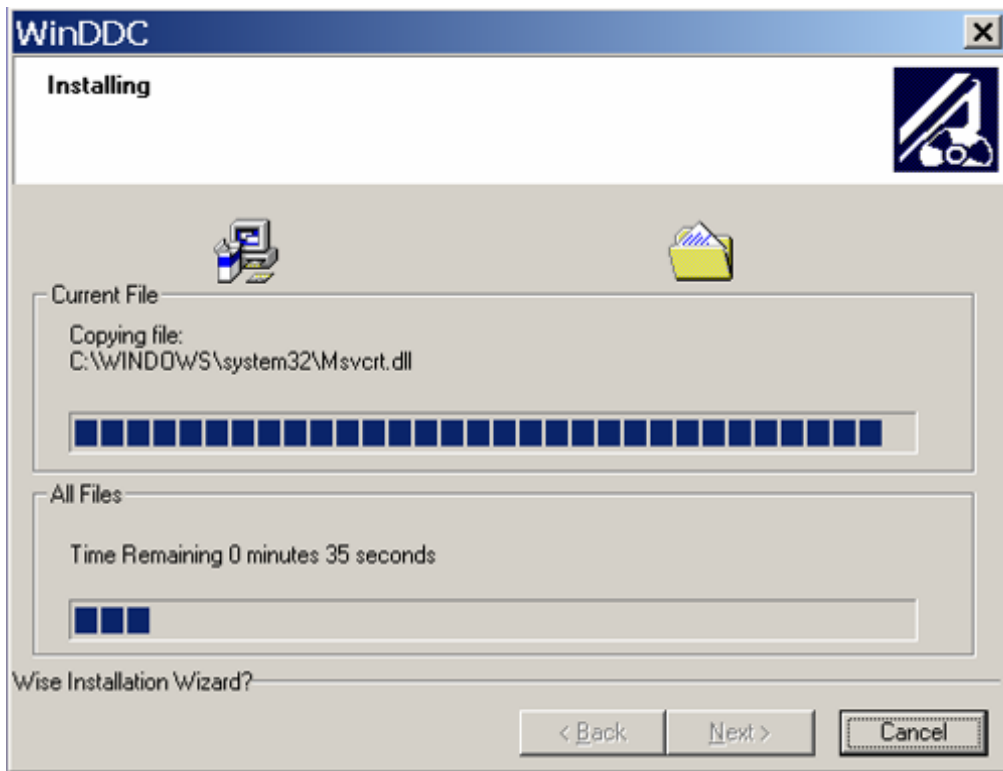
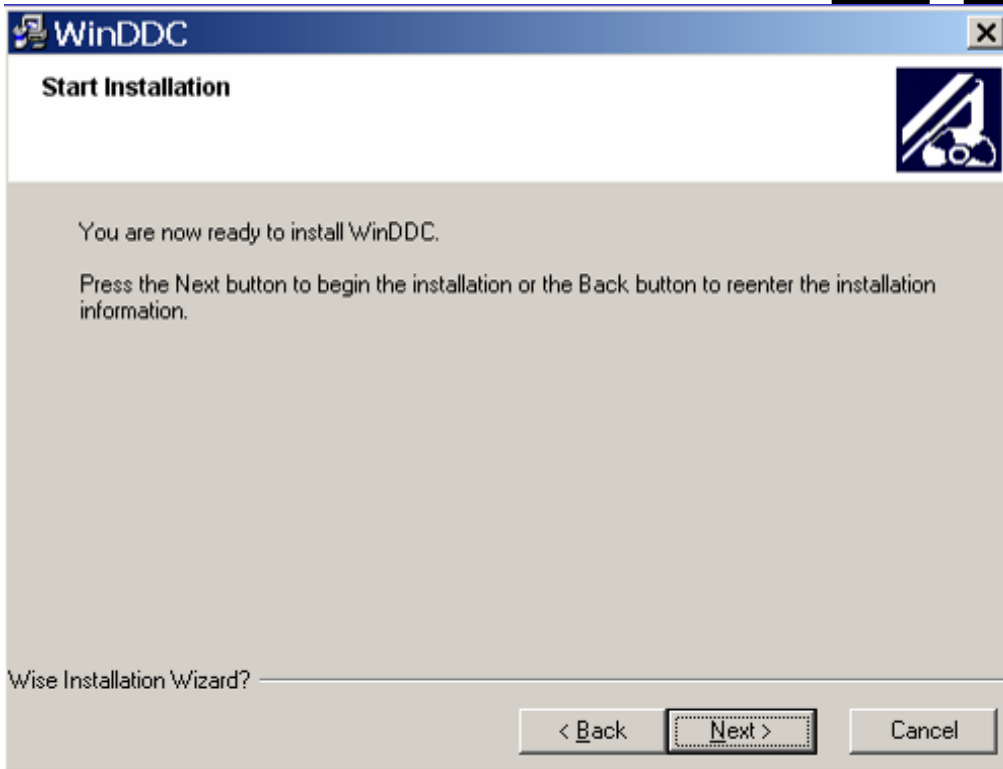
## 2. Install the “WinDDC\_setup”




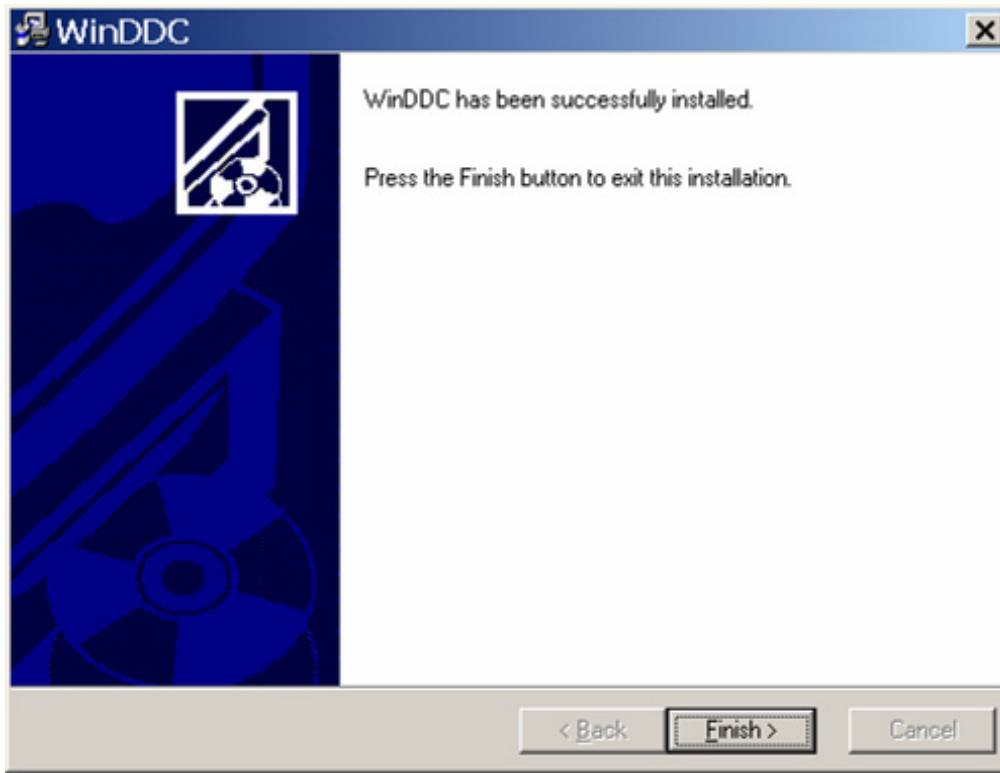
Second, you must install the

. The processing as follows:





Click  to complete the installation.



3. Connect the DDC board as follow:




When you write analog EDID, Connect this port to the Philips 190VW9's VGA port

12V Input

Connect to the PC LPT



#### 4. Take analog DDC write for example, as follow

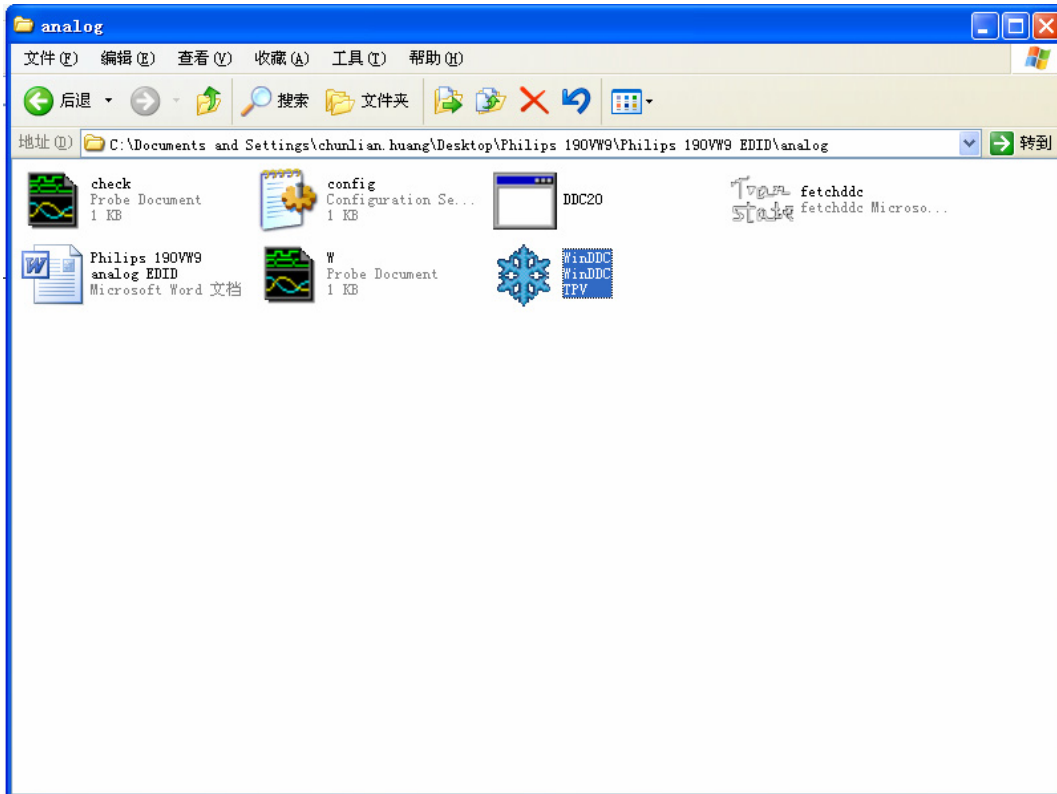

a. Double-click `WinDDC.exe`, appear as follow Figs :

```

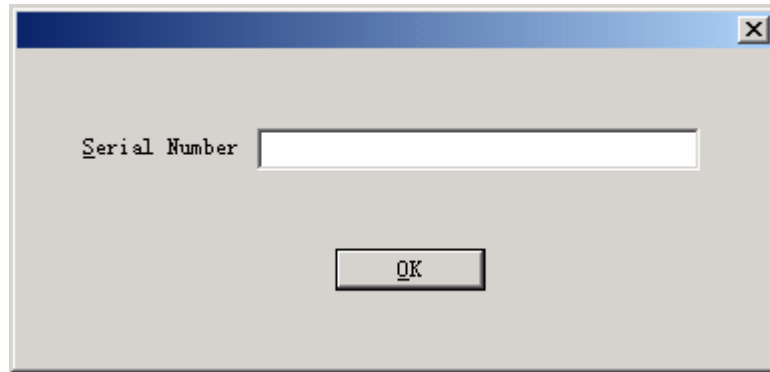
WinDDC
WriteEDID ReadEDID Help
EDID Data:
00 FF FF FF FF FF FF 00 41 0C 21 C0 07 B2 01 00
0F 11 01 03 0E 28 19 78 2A A1 50 A3 57 4C 9D 25
11 50 54 BF EE 80 71 4F 95 00 95 0F 01 01 01 01
01 01 01 01 01 01 9A 29 A0 D0 51 84 22 30 50 98
36 00 98 FF 10 00 00 1C 00 00 00 FF 00 31 31 31
31 37 31 35 31 31 31 31 31 00 00 00 FC 00 50
68 69 6C 69 70 73 20 31 39 30 56 57 00 00 00 FD
00 38 4C 1E 53 0E 00 0A 20 20 20 20 20 20 00 82

Manufacturer Name   : PHL
Product Code       : C021
Model Name         : Philips 190VW


Monitor SN         : 1111715111111[111111]
Week of Manufacture : 15
Year of Manufacture : 2007
InputSignal        : Analog

Checksum           : 82
  
```

b. Click

[WriteEDID](#)

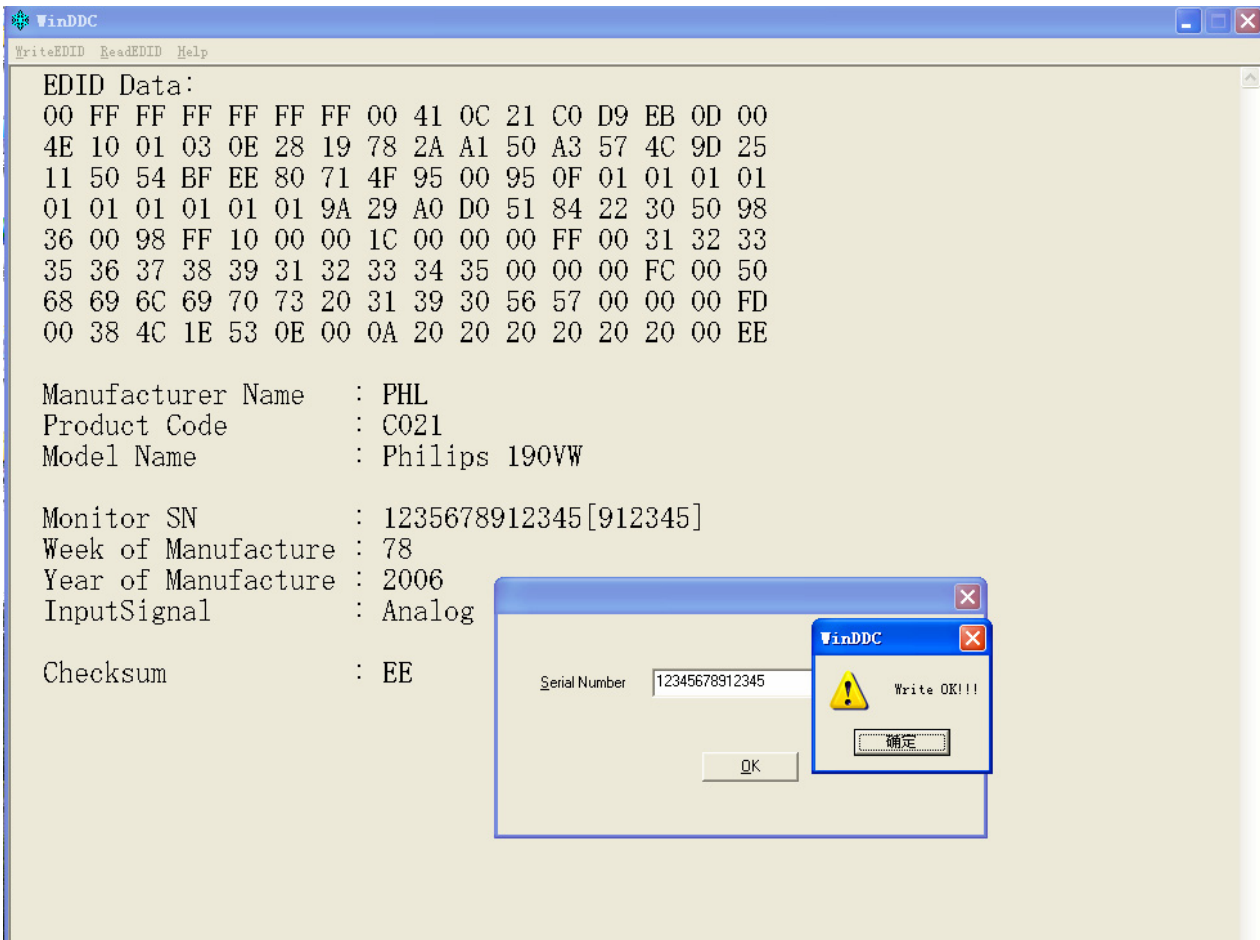c. Key 14 numbers in the Serial Number blank, then click "OK". Now analog DDC Write completes, as follow.



**190VW9 EDID****Analog**

128 bytes EDID Data (Hex):

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15

```

0: 00 FF FF FF FF FF FF 00 41 0C 21 C0 20 E7 04 00
16: 0C 0D 01 03 0E 28 19 78 2A A1 50 A3 57 4C 9D 25
32: 11 50 54 BF EE 80 71 4F 95 00 95 0F 01 01 01 01
48: 01 01 01 01 01 01 9A 29 A0 D0 51 84 22 30 50 98
64: 36 00 98 FF 10 00 00 1C 00 00 00 FF 00 31 32 33
80: 31 33 31 32 33 32 31 33 31 32 00 00 00 FC 00 50
96: 68 69 6C 69 70 73 20 31 39 30 56 57 00 00 00 FD
112: 00 38 4C 1E 53 0E 00 0A 20 20 20 20 20 20 00 18

```

Decoded EDID data

&lt;---Header---&gt;

Header: 00 FF FF FF FF FF FF 00

&lt;-x-Header-x-&gt;

&lt;---Vendor/Product Identification---&gt;

```

ID Manufacturer Name:  PHL
ID Product Code:      C021
ID Serial Number:     0004e720
Week of Manufacture:  12
Year of Manufacture:  2003

```

&lt;-x-Vendor/Product Identification-x-&gt;

&lt;---EDID Structure Version/Revision---&gt;

```

EDID Version#:        01
EDID Revision#:       03

```

&lt;-x-EDID Structure Version/Revision-x-&gt;

&lt;---Basic Display Parameters/Features---&gt;

```

Video i/p definition:  Analog
Signal Level Standard: 0.700V/0.300V(0.700Vpp)
Setup:                 Blank-to-Black not expected
Separate Sync Support: Yes
Composite Sync Support: Yes
Sync. on green video supported: Yes
Serration of the Vsync.Pulse is not required.
Max. H. Image Size :   40cm.
Max. V. Image Size :   25cm.
Display Gamma:         2.2
DPMS Features, Active off: Yes.
Display Type:          R/G/B color display.
Preferred Timing Mode: Yes.

```

&lt;---Basic Display Parameters/Features---&gt;

&lt;---Color Characteristics---&gt;

```

Red x: 0.6386718750
Red y: 0.3417968750
Green x: 0.2968750000
Green y: 0.6142578125
Blue x: 0.1455078125
Blue y: 0.0673828125
White x: 0.3125000000

```

White y: 0.3291015625

<-x-Color Characteristics-x->

<---Established Timings--->

Established Timings 1: BF

-720x400 @70Hz VGA,IBM

-640x480 @60Hz VGA,IBM

-640x480 @67Hz Apple,Mac II

-640x480 @72Hz VESA

-640x480 @75Hz VESA

-800x600 @56Hz VESA

-800x600 @60Hz VESA

Established Timings 2: EE

-800x600 @72Hz VESA

-800x600 @75Hz VESA

-832x624 @75Hz Apple,Mac II

-1024x768 @60Hz VESA

-1024x768 @70Hz VESA

-1024x768 @75Hz VESA

Established Timings 3: 80

-1152x870 @75Hz Apple,Mac II

<-x-Established Timings-x->

<---Standard Timing Identification--->

-1152x864@75

-1440x900@60

-1440x900@75

<-x-Standard Timing Identification-x->

<---Detailed Timing Descriptions--->

Detailed Timing: 1440x900 @ 60Hz.

<-x-Detailed Timing Descriptions-x->

<---Detailed Timing Descriptions--->

Detailed Timing: FF (Monitor SN) '123131232131'

Detailed Timing: FC (Monitor Name) 'Philips 190VW'

Detailed Timing: FD (Monitor limits)

Min. V. rate: 56Hz

Max. V. rate: 76Hz

Min. H. rate: 30KHz

Max. H. rate: 83KHz

Max. Pixel Clock: 140MHz

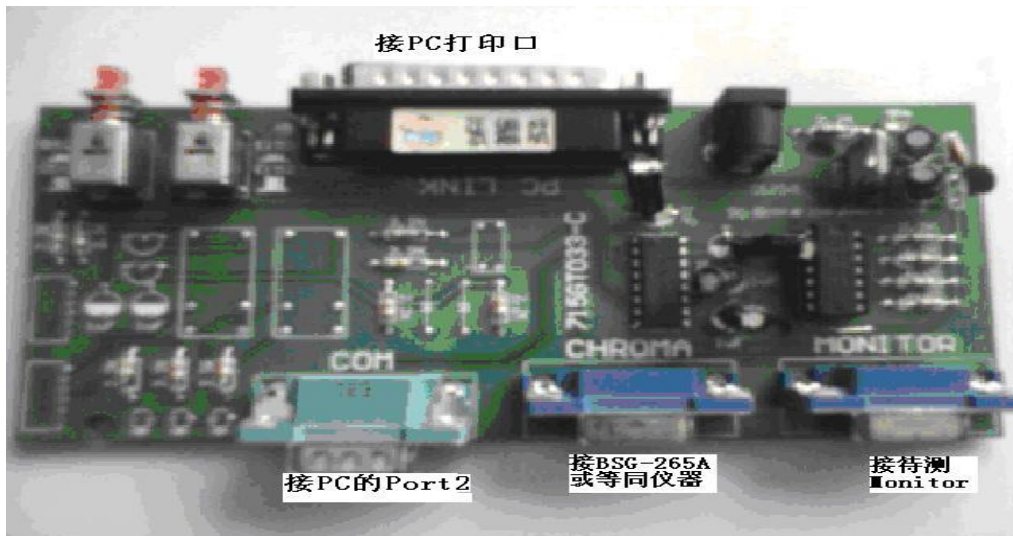
<-x-Detailed Timing Descriptions-x->

Extension Flag: 00

Checksum: 18

## 15. White Balance, Luminance Adjustment

1. Apparatuses and program: analyzer CA-210, PC, tool, FGA adjustment program (PHILIPS1190VW9.DDCI), Pattern generator.
2. Equipment installation:
  - a. Connect analyzer CA-210 to PC by USB connector, install drive program CA-SDK Ver4.00 for CA-210 and restart PC after finish installing.
  - b. Install Port95NT drive program, set PC printer connector mode as ECP mode and restart PC after finish installing.
  - c. Connect tools as follow:  
(Note: It is not necessary to connect Port2)




### 3. Adjustment

Preparation before adjustment:

- (1) Monitor should be warmed up for more than half an hour.
- (2) Make sure that the tools are connected right and drive programs have been installed OK.

Adjustment process:

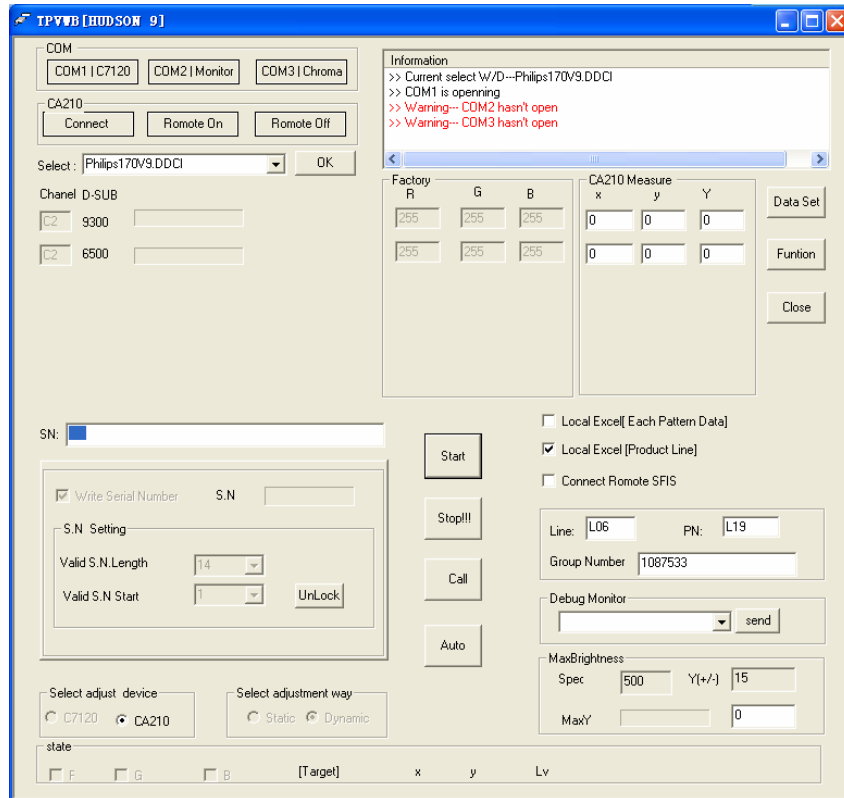
- (1) Press the power of CA-210, shut off the lens, press 0-Cal and open the lens after analyzer reset.
- (2) Start white balance adjustment program, select the right parameter according with the program and click OK.
- (3) Make sure that the lens of CA-210 aims at the center of the screen, then click Start and start adjusting.
- (4) After finish adjusting, the adjustment program displays pass, and the Start Button is changed to Next, which means you can adjust another monitor.



#### 4. Color Temp confirmation

Connect the signal to the monitor, the monitor display white-picture, use CA-210 to measure the Color Temp of the screen center and select the OSD to make sure whether the Color Temps accord with the SPEC.

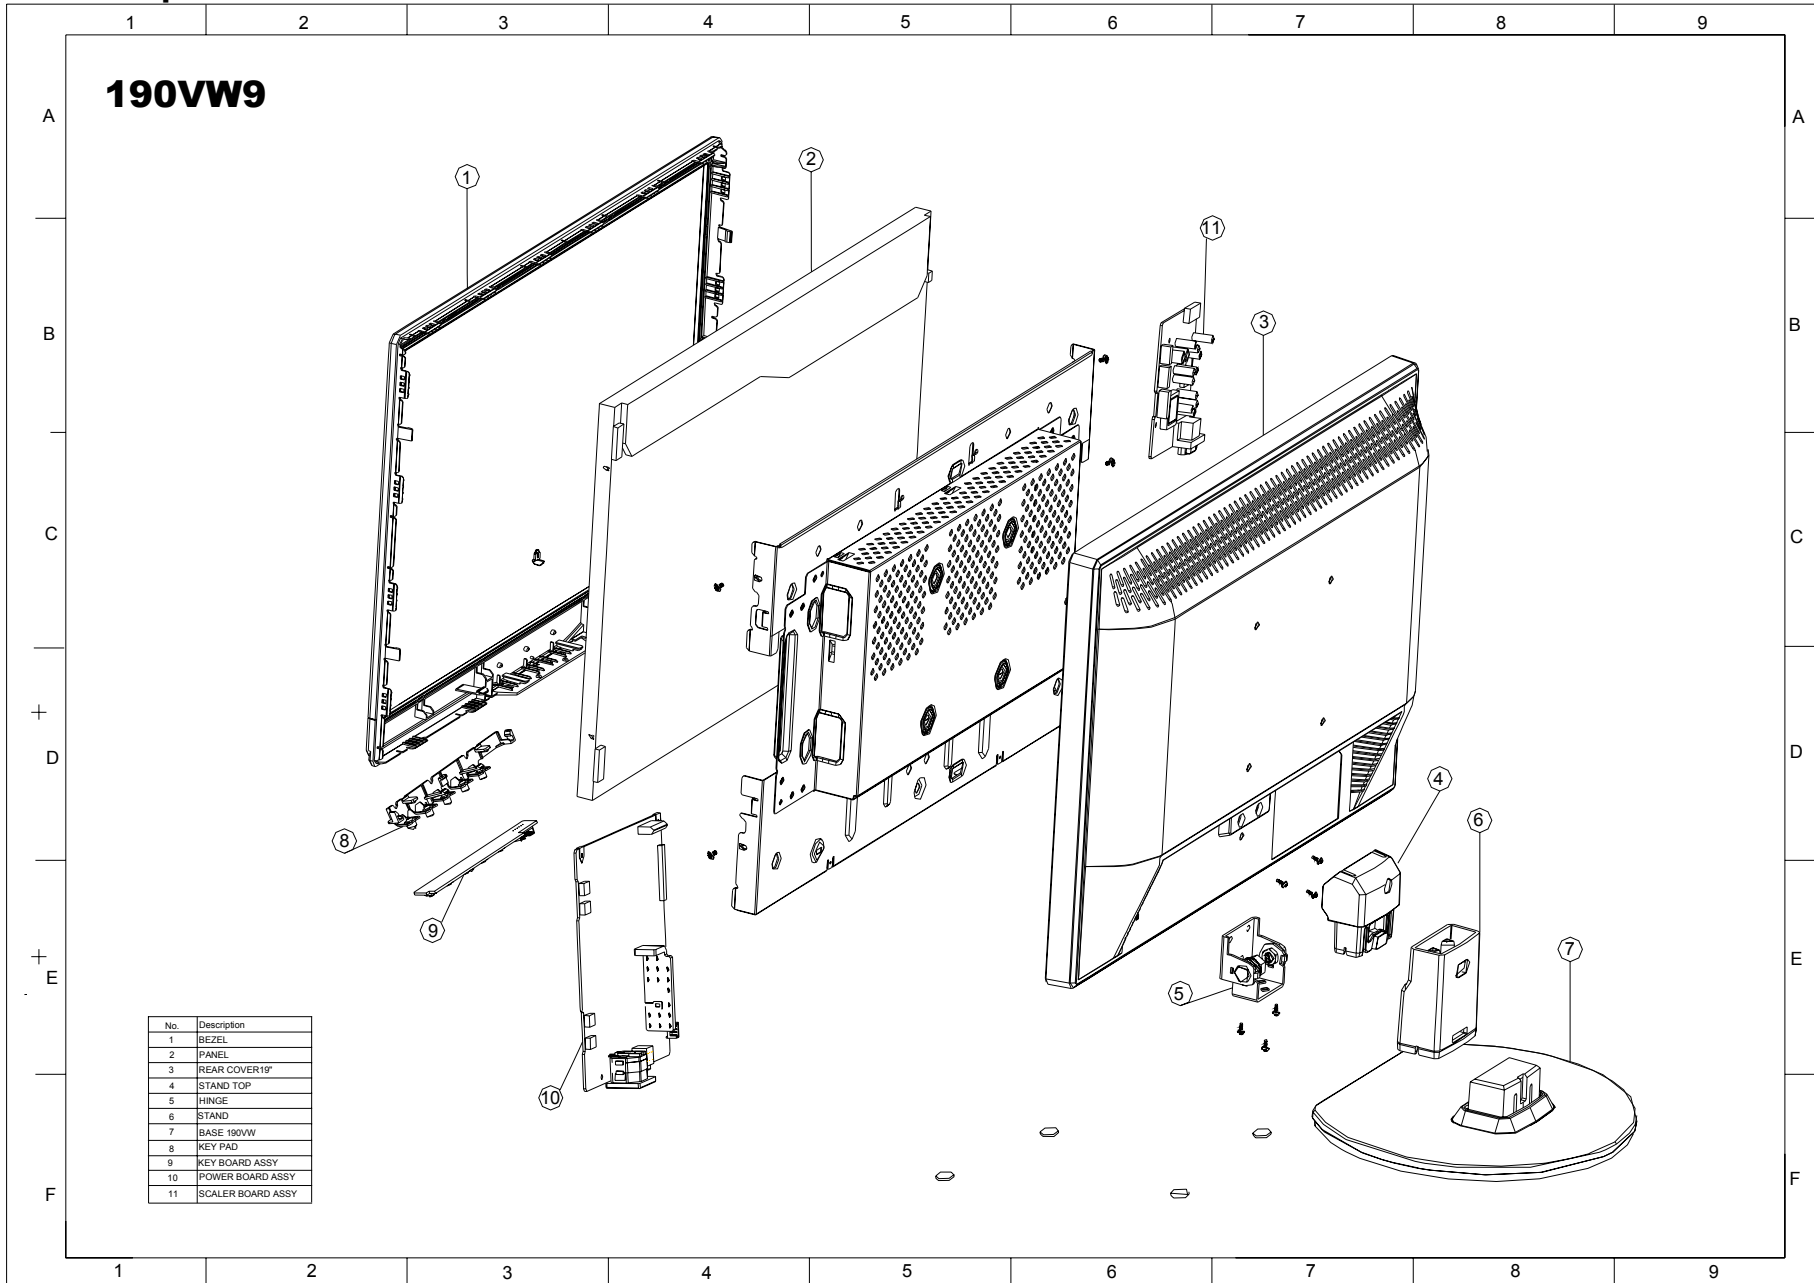16. Monitor Exploded View



190VW9

No.	Description
1	BEZEL
2	PANEL
3	REAR COVER 19"
4	STAND TOP
5	HINGE
6	STAND
7	BASE 190VW
8	KEY PAD
9	KEY BOARD ASSY
10	POWER BOARD ASSY
11	SCALER BOARD ASSY

## 17. Recommended &amp; Spare Parts List

## Recommended Parts List

190VW9FB/97(1)

Item	Location	Philips 12NC	PCM Codes	Description	Remark
1	FQ106	996510017732	Q34G0366ADTE1B0130	BEZEL_190VW	
2	FQ001	996510015573	750GLM90A1712N	PANEL M190A1-L07 C2 NB CMO	
2	FQ001B	996510015575	750GLJ90WW131N	PANEL M190MWW1 201 KS MTD	
3	FQ105	996510014815	Q34G0265ADT 4B0100	REAR COVER19"	
4	FQ107	996510014818	Q34G0266ADT 1B0100	STAND TOP	
5	FQ110	996510014821	Q37G0076011	HINGE	
6	FQ108	996510014819	Q34G0267ADT 1B0120	STAND	
7	FQ109	996510014820	Q34G0367ADT 1B0133	BASE 190VW	
8	FQ405	996510014814	Q33G0170ADT 1L	KEY PAD	
9	FQ004	996510014830	KEPC7QV9	KEY BOARD ASSY	
10	FQ003	996510014834	PWPC8941MQAM	POWER BOARD ASSY	CMO
10	FQ003B	996510014911	PWPC7941MQAJ	POWER BOARD ASSY	MTD
11	FQ002	996510014822	CBPC7MM5PHQV	SCALAR BOARD ASSY	CMO
11	FQ002B	996510015376	CBPC7LM5PHQV	SCALER BOARD ASSY	MTD
	E08902	996510014810	089G 725HAA DB	D-SUB	
	E08902	996510014809	089G 725CAA DB	D-SUB	2nd source
	E08907	996510014811	089G179E30N576	FFC CABLE	
	E08907	996510014812	089G179J30N576	FFC CABLE	2nd source
	FQ301	996510015663	089G404A15N IS	POWER CORD	
	FQ203	996510016085	Q45G 88609 77	EPE COVER	
	FQ205	996510016083	705GQ8CS002	CUSHION ASSY	
	FQ202	996510016084	Q44G9115813 1A	19 LCD PHILIPS CARTON	



	FQ103	996510014817	705GQ834046	STAND BASE ASS'Y	
	U401	996510014825	056G 562557	IC TSUM1PFR-LF	
	U404	996510005697	056G 563 52	IC AP1117D33LA TO252-3L ATC	
	U102	996510014826	056G 662 13	IC AZC099-04S SOT23-6L	
	U103	996510014826	056G 662 13	IC AZC099-04S SOT23-6L	
	U403	996500037783	056G1133 56	M24C16-WMN6TP	
	U402	996510015574	705GQ756200	MCU ASS'Y	CMO
	U402	996510015576	705GQ756201	MCU ASS'Y	MTD
	IC903	996500036055	056G 139 3A	IC PC123Y22FZ0F	
	IC901	996510014843	056G 379 98	IC LD7552DPS SOP-8	
	IC801	996500036059	056G 608 10	IC OZ9938GN-B SOIC-16	
	IC904	996510002780	056G 158 10 T	IC AZ431AZ-AE1 TO-92 BY AAC	
	F901	996510013724	084G 56 4 B	FUSE 4A 250V	
	F901	996510006276	084G 56 4W	FUSE 4.0A 250V	2nd source
	F903	996510013724	084G 56 4 B	FUSE 4A 250V	
	F903	996510006276	084G 56 4W	FUSE 4.0A 250V	2nd source
	T901	996510014841	S80GL22T3V	XFMR POWER 490uH TPV-PT	
	T901	996510014838	080GL22T 3 N	XFMR 510uH YUVA-822	
	T901	996510014837	080GL22T 3 L	XFMR 510uH PT-009287	2nd source
	PT801	996510014840	S80GL19T32V	Transformer ASSY	
	PT801	996510014836	080GL19T 32 DN	XFMR 787mH TK.2027R.101	
	X401	996510014824	093G 22 53 J	14.31818MHZ/32PF/49US	

## 190VW9FB/97(2)

Item	Location	Philips 12NC	PCM Codes	Description	Remark
1	FQ106	996510017608	Q34G0410ADTA1B0130	BEZEL(HUDSON9-190VW9)	
1	FQ106	996510017841	Q34G0410ADTB1B0130	BEZEL(HUDSON9-190VW9)	
2	FQ001	996510017606	750GLU190W1042N000	PANEL M190PW01 V200 SZ AUO	
2	FQ001		750GLG190W1G13M0PH	PANEL LM190WX1-TLG1 GZ LGD	
3	FQ105	996510017607	Q34G0265ADT 9B0100	REAR COVER19"	
3	FQ105		Q34G0265ADT 4B0100	REAR COVER19"	2nd source
4	FQ103	996510014817	705GQ834046	STAND BASE ASS'Y	
5					
6					
7					
8	FQ405	996510014903	Q33G0170ADT 1L0100	KEY PAD	AUO
8	FQ405		Q33G0170ADT 1L	KEY PAD	2nd source
9	FQ004	996510014830	KEPC7QV9	KEY BOARD ASSY	
10	FQ003	996510017609	PWPC8942MQA7	POWER BOARD ASSY	
11	FQ002	996510017610	CBPC8AM5PHQ1	SCALER BOARD ASSY	AUO
11	FQ002		CBPC8GM5PHQ1	SCALER BOARD ASSY	LGD
	E08901	996510015663	089G404A15N IS	POWER CORD	
	E08902	996510014810	089G 725HAA DB	D-SUB CABLE	
	E08907	996510014812	089G179J30N576	FFC CABLE	
	F901	996510017352	084G 56 3 B	FUSE 3.15A 250V	
	F903	996510017352	084G 56 3 B	FUSE 3.15A 250V	
	FQ202	996510016084	Q44G9115813 1A	19 LCD PHILIPS CARTON	
	FQ203	996510016085	Q45G 88609 77	EPE BAG FOR MONITOR	

	FQ205	996510016083	705GQ8CS002	CUSHION ASSY	
	IC903	996500036055	056G 139 3A	IC PC123Y22FZ0F	
	IC904	996500036054	056G 158 12	KIA431A-AT/P TO-92	
	T801	996510017351	080GL20T510 DN	X'FMR INVERTER 142uH	
	T802	996510017351	080GL20T510 DN	X'FMR INVERTER 142uH	
	T901	996510014838	080GL22T 3 N	X'FMR 510uH YUVA-822	
	U102	996510014826	056G 662 13	IC AZC099-04S SOT23-6L	
	U103	996510014826	056G 662 13	IC AZC099-04S SOT23-6L	
	U401	996510014825	056G 562557	IC TSUM1PFR-LF	
	U402	996510017611	705GQ856007	MCU ASS'Y	AUO
	U402		705GQ856012	MCU ASS'Y	LGD
	U404	996510005697	056G 563 52	IC AP1117D33LA TO252-3L ATC	
	U801	996510006256	056G 379 22	IC TL494IDR SOIC-16	
	U901	996510014843	056G 379 98	IC LD7552DPS SOP-8	
	X401	996510014824	093G 22 53 J	14.31818MHZ/32PF/49US	

**Service Kit**

Description	PCM Codes	Philips 12NC	Remark
DDC KIT	715L2005C2	9965 000 43197	FOR ALL MODEL
OSD SN KIT	715GT033 C	9965 000 43252	FOR ALL MODEL
NOVATEK ISP KIT	715LT035A	9965 000 43198	FOR ALL HUDSON 7
			FOR 170A8, 190B8, 150S8, 170S8,190S8, 170V8,190V8
MSTAR ISP KIT	715GT039 A	996510010027	200CW8 190VW9
REALTEK ISP KIT	715GT039 A	996510010027	170CW8

## 18. Different Part List

Diversity of 190VW9FB/27(1) compared with 190VW9FB/97(1)						
Location	190VW9FB/27(1)			190VW9FB/97(1)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301		089G402A15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD
FQ201		Q40G 19N81328A	RATING LABEL	996520034250	Q40G 19N81325A	RATING LABEL
FQ106		Q34G0366ADTC1B0130	BEZEL_190VW	996510017732	Q34G0366ADTE1B0130	BEZEL_190VW

Diversity of 190VW9FB/05(1) compared with 190VW9FB/97(1)						
Location	190VW9FB/05(1)			190VW9FB/97(1)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301		89G410A 15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD
FQ106		Q34G0366ADTC1B0130	BEZEL_190VW	996510017732	Q34G0366ADTE1B0130	BEZEL_190VW

Diversity of 190VW9FB/75(1) compared with 190VW9FB/97(1)						
Location	190VW9FB/75(1)			190VW9FB/97(1)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301	996510016841	089G412A15NIS3	POWER CORD	996510015663	089G404A15N IS	POWER CORD

Diversity of 190VW9FB/94(1) compared with 190VW9FB/97(1)						
Location	190VW9FB/94(1)			190VW9FB/97(1)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301	996510015866	089G417A15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD

Diversity of 190VW9FB/93(1) compared with 190VW9FB/97(1)						
Location	190VW9FB/93(1)			190VW9FB/97(1)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301	996510015859	089G414A15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD
FQ106	996510017731	Q34G0366ADTF1B0130	BEZEL 190VW9	996510017732	Q34G0366ADTE1B0130	BEZEL_190VW
FQ202	996510017314	Q44G9115813 2A	19 LCD PHILIPS CARTON	996510016084	Q44G9115813 1A	19 LCD PHILIPS CARTON

Diversity of 190VW9FB/78(1) compared with 190VW9FB/97(1)						
Location	190VW9FB/78(1)			190VW9FB/97(1)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301		089G402A15NIS1	POWER CORD	996510015663	089G404A15N IS	POWER CORD
FQ103		705GQ834258	19" LCD STAND BSAE ASS'Y	996510014817	705GQ834046	STAND BASE ASSY
FQ106		Q34G0366ADTE1B0100	BEZEL(19")	996510017732	Q34G0366ADTE1B0130	BEZEL_190VW
FQ002		CBPC7MM5PHQ1	SCALER BOARD ASSY	996510014822	CBPC7MM5PHQV	SCALER BOARD ASSY
FQ004		KEPC7QPH	KEY BOARD ASSY	996510014830	KEPC7QV9	KEY BOARD ASSY

The BOMS of 190VW9FB/62(1) and 190VW9FB/00(1) are the same as the BOM of 190VW9FB/97(1).

Diversity of 190VW9FB/27(2) compared with 190VW9FB/97(2)						
Location	190VW9FB/27(2)			190VW9FB/97(2)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
E08901		089G402A15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD
FQ202		Q44G9115813 3A	19 LCD PHILIPS CARTON		Q44G9115813 1A	19 LCD PHILIPS CARTON
IC904		056G 158504AME	IC AME431BAJATB25Z AME		056G 158 12	KIA431A-AT/P TO-92

Diversity of 190VW9FB/62(2) compared with 190VW9FB/97(2)						
Location	190VW9FB/62(2)			190VW9FB/97(2)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301	996510015663	089G404A15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD

Diversity of 190VW9FB/75(2) compared with 190VW9FB/97(2)						
Location	190VW9FB/75(2)			190VW9FB/97(2)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301	996510016841	089G412A15NIS3	POWER CORD	996510015663	089G404A15N IS	POWER CORD
IC904		056G 158504AME	IC AME431BAJATB25Z AME		056G 158 12	KIA431A-AT/P TO-92

Diversity of 190VW9FB/94(2) compared with 190VW9FB/97(2)						
Location	190VW9FB/94(2)			190VW9FB/97(2)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
E08901	996510015866	089G417A15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD
FQ205	996510014817	705GQ834046	STAND BASE ASS'Y		705GQ8CS002	CUSHION ASSY

Diversity of 190VW9FB/93(2) compared with 190VW9FB/97(2)						
Location	190VW9FB/93(2)			190VW9FB/97(2)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
E08901	996510015859	089G414A15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD
FQ106	996510017841	Q34G0410ADTB1B0130	BEZEL(HUDSON9-190VW9)	996510017608	Q34G0410ADTA1B0130	BEZEL(HUDSON9-190VW9)
FQ202	996510017314	Q44G9115813 2A	19 LCD PHILIPS CARTON	996510016084	Q44G9115813 1A	19 LCD PHILIPS CARTON
FQ204	996520034251	Q70G9002813 4A	CD MANUAL			
FQ206	996510017313	Q41G780081375A	QSG FOR 190VW			

Diversity of 190VW9FB/00(2) compared with 190VW9FB/97(2)						
Location	190VW9FB/00(2)			190VW9FB/97(2)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
FQ301		089G404A15N IS	POWER CORD	996510015663	089G404A15N IS	POWER CORD
IC904		056G 158504AME	IC AME431BAJATB25Z AME		056G 158 12	KIA431A-AT/P TO-92

Diversity of 190VW9FB/05(2) compared with 190VW9FB/97(2)						
Location	190VW9FB/05(2)			190VW9FB/97(2)		
	Philips 12NC	PCM Codes	Description	Philips 12NC	PCM Codes	Description
E08901		089G410A15N IS	POWER CORD WALL-OUT FOR UK	996510015663	089G404A15N IS	POWER CORD
IC904		056G 158504AME	IC AME431BAJATB25Z AME		056G 158 12	KIA431A-AT/P TO-92

## 19. General Product Specification

### CONTENTS

- 1 FOREWORD
- 2 PRODUCT PROFILE
  - 2.1 LCD
  - 2.2 SCANNING FREQUENCIES
  - 2.3 AMBIENT TEMPERATURE: 0 °C - 40 °C
- 3 ELECTRICAL CHARACTERISTICS
  - 3.1 INTERFACE SIGNALS
  - 3.2 INTERFACE
  - 3.3 TIMING REQUIREMENT
  - 3.4 HORIZONTAL SCANNING
  - 3.5 VERTICAL SCANNING
  - 3.6 POWER INPUT CONNECTION
  - 3.7 POWER MANAGEMENT
  - 3.8 VGA DISPLAY IDENTIFICATION
  - 3.9. DDC/ CI SUPPORT
  - 3.10. DATA FOR EDID & INF FILE
  - 3.11. HOT-KEY DEFINITION
- 4 VISUAL CHARACTERISTICS
  - 4.1 TEST CONDITIONS
  - 4.2 BRIGHTNESS
  - 4.3 IMAGE SIZE
  - 4.4 BRIGHTNESS UNIFORMITY
  - 4.5 CHECK CROSS TALK (S)
  - 4.6 WHITE COLOR ADJUSTMENT
- 5 MECHANICAL CHARACTERISTICS
  - 5.1 COSMETIC PHILIPS ID
  - 5.2 MECHANICAL DATA FILES PROE FILES REQUIRED
  - 5.3 LOCATION OF PHILIPS LOGO PER PHILIPS MAKE-UP SHEET
  - 5.4 GAP BETWEEN PANEL AND FRONT BEZEL 1.4MM (TYPE)
  - 5.5 LOCATION OF CONTROL ICONS- PER PHILIPS GRAPHIC SHEET
  - 5.6 COLOR FOR RESIN/PAINT PER PHILIPS MAKE-UP SHEET
  - 5.7 RESINS
  - 5.8 IF RAIN IS USED
  - 5.9 PLASTIC MOLD TOOLING
  - 5.10 PLASTICS FLAMMABILITY
  - 5.11 TEXTURE/GLOSSING OF HOUSING
  - 5.12 TILT AND SWIVEL BASE
  - 5.13 KENNINGTON LOCK
  - 5.14 LABEL
  - 5.15 PRODUCT DIMENSION/WEIGHT/ WEIGHT (REFER TO PHILIPS APPROVED SHT 191)
  - 5.16 TRANSPORTATION



5.17 PALLET/CONTAINER LOADING (REFER TO PHILIPS APPROVED SHT 560)

6. ENVIRONMENTAL CHARACTERISTICS

6.1 SUSCEPTIBILITY OF DISPLAY TO EXTERNAL ENVIRONMENT

6.2 TRANSPORTATION TESTS

6.3 DISPLAY DISTURBANCES FROM EXTERNAL ENVIRONMENT

6.4 DISPLAY DISTURBANCES TO EXTERNAL ENVIRONMENT

7. RELIABILITY

7.1 MEAN TIME BETWEEN FAILURES

8. QUALITY ASSURANCE REQUIREMENTS

8.1 ACCEPTANCE TEST

9. PHILIPS' FLAT PANEL MONITORS PIXEL DEFECT POLICY

10. REGULATORY COMPLIANCE

10.1 WORLDWIDE REGULATORY

10.2 EMC REQUIREMENTS

10.3 ROHS

10.4 WEEE

10.5 ONGOING REGULATORY

## 1. FOREWORD

This specification describes a 19" WXGA multi-scan color TFT LCD monitor with maximum resolution up to 1440\*900 /75 Hz non-interlaced. All optical characteristics (including WHITE-D, Brightness, and so on) are determined according to panel specification after warming up approximate 30 minutes that brightness stability is optimal, and follow strictly after panel specification.

## 2. PRODUCT PROFILE

This display monitor unit is a color display monitor enclosed in PHILIPS styling cabinet which has an integrated tilt base.

### 2.1 LCD

Tier1: MTD, CMO

2.1.1 Type NR.	: M190MWW1 (TN)
Outside dimensions	: 427.2(H) x 277.4(V) x 15.5(D) mm(Typ.)
Pitch (mm)	: 0.285mm (per one triad)x0.285mm
Color pixel arrangement	: RGB vertical stripes
Display surface	: Hard coating (3H), Anti-glare treatment of the front polarizer
Color depth	: 16.7M colors
Backlight	: CCFL edge light system
Active area ( WxH )	: 410.4 (H) x 256.5 (V)
View angle	: Horizontal 160 (Typ.), Vertical 160 (Typ.)
Contrast ratio	: 800:1(typical)
White luminance	: 300 nits (Typ.)
Gate IC	:
Source IC	:
Response time	: 5ms (typ)
MTBF	:
2.1.2 Type NR.	: CMO, M190A1-L07 (TN)
Outside dimensions	: 427.2(w) *277.4(h)*16.0(d) (Typ) mm
Pitch (mm)	: 0.285 mm x 0.285 mm
Color pixel arrangement	: RGB vertical stripes
Display surface	: low reflection, antiglare with hard coating
Color depth	: 16.7M colors
Backlight	: CCFL edge light system
Active area (WxH)	: 410.4 x 256.5mm (19.05" diagonal)
View angle (CR>10)	: Horizontal 85(Typ.), Vertical 80(Typ.)
Contrast ratio	: 630:1(Min) 1000:1(Tye)
White luminance ( center )	: 230 nits (Min), 300 nits (Typ.)
Gate IC	:
Source IC	:
Response time	: 5ms (typ)
MTBF	: 50000 hours

2.13 Type NR.	: AUO, M190PW01 (TN)
Outside dimensions	: 428.0(W) x278.0 (H) x18.5 (D)(Typ.)
Pitch (mm)	: 0.2835x0.2835
Color pixel arrangement	: RGB vertical stripes
Display surface	: Anti-glare type,Hardness 3H
Color depth	: 16.7M colors (RGB 6-bits+HiFRC)
Backlight	: CCFL edge light system
Active area ( WxH )	: 408.24(H)x255.15(V) (18.95")
View angle	: Horizontal 160 (Typ.), Vertical 160 (Typ.)
Contrast ratio	: 800:1(typical)
White luminance	: 300 nits (Typ.)
Gate IC	:
Source IC	:
Response time	: 5ms (typ)
MTBF	: 50000 hours

2.1.4. Type NR.	: LGD, LM190WX1-TLG1
Outside dimensions	: 428.0(w)*278.0(h)*16.5(d) (Typ.) mm
Pitch (mm)	: 0.2835 mm x 0.2835 mm
Color pixel arrangement	: RGB vertical stripes
Display surface	: Hard coating (3H), Anti-glare treatment of the front polarizer
Color depth	: 16.7M colors
Backlight	: CCFL edge light system
Active area (WxH)	: 408.24(H) x255.15 (V) (18.95")
View angle (CR>10)	: Horizontal 85(Typ.), Vertical 80(Typ.)
Contrast ratio	: 700:1(Min) 1000:1(Typ.)
White luminance ( center )	: 250 nits (Min), 300 nits (Typ.)
Gate IC	:
Source IC	:
Response time	: 5ms (typ.)
MTBF	: 50000 hours

## 2.2 Scanning frequencies

Hor. : 30 – 83 K Hz

Ver.: 56 - 76 Hz

Video dot rate: < 140 MHz

Power input: 90-264 V AC, 50/60 ± 2 Hz

Power consumption : <40W maximum,< 36W ( Typ.)

Functions:

(1) D-SUB analog R/G/B separate inputs, H/V sync separated, Composite (H+V) TTL level, SOG sync

**2.3 Ambient temperature:** 0 °C - 40°C

### 3. Electrical characteristics

#### 3.1 Interface signals

##### 1). D-Sub Analog

Input signal: Video, Hsync, Vsync

Video: 0.7 Vp-p, input impedance, 75 ohm @DC

Sync: Separate sync TTL level, input impedance 2.2k ohm terminate

Hsync Positive/Negative

Vsync Positive/Negative

Composite sync TTL level, input impedance 2.2k ohm terminate

(Positive/Negative)

Sync on green video 0.3 Vp-p Negative (Video 0.7 Vp-p Positive)

#### 3.2 Interface

##### 3.2.1 D-Sub Cable

Length : 1.5 M +/- 50 mm

Fix with monitor when packing, with transplant pin protective cover.

Connector type : D-Sub male with DDC2B pin assignments.

Blue connector thumb-operated jack screws

Pin assignments:

Pin No.	Signal
1	Red
2	Green/ SOG
3	Blue
4	Sense (GND)
5	Cable Detect (GND)
6	Red GND
7	Green GND
8	Blue GND
9	DDC +3.3V or +5V
10	Logic GND
11	Sense (GND)
12	Bi-directional data
13	H/H+V sync
14	V-sync
15	Data clock

## 3.2.2 Software control functions via OSD / control adjustable functions:

Please refer to following Hudson8 OSD definitions

Reset - No: Exit

Yes: Auto adjustment for displaying timing mode and recall factory preset

**OSD Tree**

Level 1	Level 2	Level 3	Default
Picture	Picture Format	Wide Screen	
		4:3	
	Brightness	(0~100)	100
	Contrast	(0~100)	50
Color	Color Temp.	(5000K,6500K,7500K,8200K,9300K,11500K)	6500K
	sRGB		
	User Define	(Red:0~100)	100
		(Green:0~100)	100
		(Blue:0~100)	100
Language	English		(English)
	Espanol		
	Francais		
	Deutsch		
	Italiano		
	Portugues		
	Russia		
	S.Chinese		
OSD Setting	Horizontal	(0~100)	50
	Vertical	(0~100)	50
	Transparency	(Off, 1, 2, 3, 4)	Off
	OSD Time out	(5, 10, 20, 30, 60)	20
Setup	Phase	(0~100)	
	Clock	(0~100)	
	H.Position	(0~100)	
	V.Position	(0~100)	
	Reset	(Yes, No)	No
	Resolution Notification	(On, Off)	<b>Off</b>
	Information		
Input	Auto		Auto
	VGA		
	DVI		

### 3.3 Timing requirement

#### Factory Preset mode definition :

1. Perfect FOS while presenting all required timings.
2. Required timings need to be specified in User's Manual

#### User mode

1. Can be showed (not over scalar or Panel spec.)
2. It needs to reserve the 22 timings space in memory size.

#### 3.3.1 Mode storing capacity

Factory preset modes : 11

User modes : 22

Note: 1. Screen displays perfect picture at 11 factory-preset modes.

2. Screen displays visible picture with OSD warning when input modes are the 22 preset modes.

#### 3.3.2 Factory preset modes

Factory modes and preset modes are defined in the enclosed timing table file.

Resolution		Pixel Rate ( MHz )	Horizontal ( KHz )	Vertical ( Hz )	V_Total ( Line )	Polarity ( H / V )	
DOS		640x350/70	25.18	31.47	70.09	449	p / n
DOS		720x400/70	28.32	31.47	70.09	449	n / p
DMT	4:3	640x480/60	25.18	31.47	59.94	525	n / n
MAC		640x480/67	30.24	35.00	66.67	525	n / n
DMT	4:3	640x480/72	31.50	37.86	72.81	520	n / n
DMT	4:3	640x480/75	31.50	37.50	75.00	500	n / n
DMT	4:3	800x600/56	36.00	35.16	56.25	625	p / p
DMT	4:3	800x600/60	40.00	37.88	60.32	628	p / p
DMT	4:3	800x600/72	50.00	48.08	72.19	666	p / p
DMT	4:3	800x600/75	49.50	46.88	75.00	625	p / p
MAC		832x624/75	57.28	47.73	74.55	667	n / n
DMT	4:3	1024x768/60	65.00	48.36	60.00	806	n / n
DMT	4:3	1024x768/70	75.00	56.48	70.07	806	n / n
DMT	4:3	1024x768/75	78.75	60.02	75.03	800	p / p
DMT		1152x864/75	108.00	67.50	75.00	900	p / p
MAC		1152x870/75	100.00	68.68	75.06	915	n / n
SUN		1152x900/66	92.94	61.80	65.95	937	p / p
SUN		1152x900/76	105.56	71.71	76.05	943	p / p
CVT	16:9	1280x720/60	74.50	44.77	59.86	748	n / p
CVT	16:9	1280x720/75	95.75	56.46	74.78	755	n / p
CVT	15:9	1280x768/60	79.50	47.78	59.87	798	n / p
CVT	15:9	1280x768/75	102.25	60.29	74.89	805	n / p
CVT		1280x800/60	83.50	49.70	59.81	831	n / p
CVT		1280x800/75	106.50	62.80	74.93	838	n / p
DMT	4:3	1280x960/60	108.00	60.00	60.00	1000	p / p
DMT	5:4	1280x1024/60	108.00	63.89	60.02	1066	p / p

DMT	5:4	1280x1024/75	135.00	79.98	75.03	1066	p / p
SUN	5:4	1280x1024/66	117.00	71.70	67.00	1067	p / p
SUN	5:4	1280x1024/76	138.01	81.10	76.00	1066	n / n
DMT	16:9	1360x768/60	85.50	47.71	60.02	795	p / p
CVT	16:9	1360x768/75	109.00	60.29	74.89	805	n / p
CVT		1440x900/60_RB	88.75	55.47	59.90	926	p / n
CVT		1440x900/60	106.50	55.94	59.89	934	n / p
CVT		1440x900/75	136.75	70.64	74.98	942	n / p

### 3.4 Horizontal scanning

Sync polarity : Positive or Negative

Scanning frequency : 30 – 83 K Hz

### 3.5 Vertical scanning

Sync polarity : Positive or Negative

Scanning frequency : 56 - 76 Hz

### 3.6 Power input connection

Power cord length : 1.5 M

Power cord type : 3 leads power cord with protective earth plug.

### 3.7 Power management (supplier to input)

The monitor must comply with the Microsoft On Now specification, and meet EPA requirements.

Mode	HSYNC	VSYNC	Video	Power-cons.	Indication	Rec. time
Power-On	On	On	active	< 40W Max. <36W Typ.	Green LED	--
Power saving	Off	Off	blanked	< 1W	Amber LED	< 3 s
DC Power Off			N/A	< 1W	LED Off	

\* Energy star report less than 33 watt

### 3.8 VGA Display identification

In accordance with VESA Display Channel Standard Ver.1.0 and DDC 2B capability

### 3.9 DDC/ CI Support

In accordance with VESA DDC/CI and MCCS ver.2.0, the monitor should be workable with

Philips Smart Manage, Smart Control V6.1, and Protrait Display Tune at least.

### 3.10 Data for EDID & INF file

1	User visible strings on .inf file	Philips 190VW (19inch WIDE LCD MONITOR 190VW9)
2	Manufacturer ID ( EDID data)	PHL
3	Product ID, "xxxx" 4 codes	MSB(byte 12): C0
		LSB (byte 11): 21
4	maximum resolution	1440x900
5	Horizontal Frequency Range	30~83 KHz
6	Vertical Frequency Range	55~76Hz
7	Monitor Name (13 characteries max.)	Philips 190VW

## 3.11 Hot-key definition

Item	Key	Key press time	OSD Timeout	OSD Message
Monitor Controls Lock	[Menu]	6 sec	5 sec	Monitor Controls Locked Monitor Controls Unlocked (default)
Factory Mode	[AUTO]+[Menu]+[Power]			
DDC/CI On/OFF for VISTA	[MENU]+[DOWN]	5 sec	5 sec	DDC/CI On (default) DDC/CI Off

Any deviation between document and sample, please refer to Philips approved sample.

## 4. Visual characteristics

## 4.1 Test conditions

Unless otherwise specified, this specification is defined under the following conditions.

- (1) Input signal : As defined in 3.3, 1440 x 900  
non-interlaced mode (1440\*900@60Hz 146.25MHz), signal sources must have 75 ohm output impedance.
- (2) Luminance setting : controls to be set to 300 nits (typical) with full screen 100 % duty cycle white signal
- (3) Warm up: more than 30 minutes after power on with signal supplied.
- (4) Ambient light: 400 -- 600 lux.
- (5) Ambient temperature: 20 ± 5 °C

## 4.2 Brightness

Follow Panel specification.

## 4.3 Image size

Actual display size: Refer to 2.1 LCD PANEL spec.

## 4.4 Brightness uniformity

Set contrast at 100% and turn the brightness to get average above 300 nits at centre of the screen. Apply the Fig 1, it should comply with the following formula:

$$\frac{B_{\min}}{B_{\max}} \times 100\% > 75\% \text{ (Follow panel spec.)}$$

Where B\_max =Maximum brightness, B\_min = Minimum brightness

## 4.5 Check Cross talk (S)

Apply Pattern 2. Set contrast and brightness at 100 %.

Measure YA. Then output Pattern 3 and measure YB.

the cross talk value :

$$\frac{ABS ( YA - YB )}{YA} \times 100\% < 1.5 \%$$



#### 4.6 White color adjustment

There are three factory preset white color 9300K, 6500 and sRGB Align by FGA function.

Apply full gray64 pattern, with brightness in 100 % position and the contrast control at 50 % position.

The 1931 CIE Chromaticity (color triangle) diagram (x , y) coordinate for the screen center should be:

##### Product specification

CIE coordinates	(x,y)	
9300K	x = 0.283 ± 0.015 y = 0.297 ± 0.015	
6500K/sRGB	x = 0.313 ± 0.015 y = 0.329 ± 0.015	
sRGB	x = 0.313 ± 0.015 y = 0.329 ± 0.015	

#### 5. Mechanical characteristics

##### 5.1 Cosmetic -

##### Philips ID

##### 5.2 Mechanical data files -

##### ProE files required

##### 5.3 Location of Philips logo -

##### Per Philips make-up sheet

##### 5.4 Gap between panel and front bezel

< 1.4mm (typ)

##### 5.5 Location of Control icons -

##### Per Philips Graphic sheet

##### 5.6 Color for resin/paint -

##### Per Philips make-up sheet

##### 5.7 Resins

- RoHS required
- WEEE required.
- Resin type/selection refer to Project Book Section 7.2 Plastic material.

##### 5.8 If paint is used

- RoHS required
- WEEE require
- If new painting type need to implement, refer to UN-D 1235.

##### 5.9 Plastic mold tooling

- Tooling to be designed to minimize cosmetic defects induced by molding process (sink, blush, weld lines, gate marks, ejector marks, etc.). Refer to "TYV61-90007".
- Painting to cover up cosmetic defects due to molding is strongly discouraged.
- China RoHS mark requested

##### 5.10 Plastics flammability

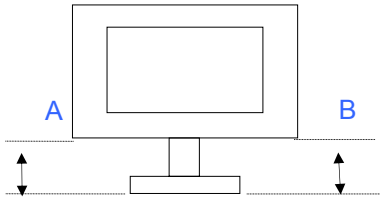
- All Plastics to be Flame Retardant UL 94-HB.
- Base / Pedestal to be Flame Retardant UL 94-HB.
- All major plastic parts (bezel, back cover) need to be molded from same resin. Plastic resin type selection should be referred to "TY R83-2-9002-1".

### 5.11 Texture/Glossing of housing


- The texture area and texture no should follow Philips make-up sheet.
- The exterior surfaces shall have a uniform texture.
- Philips must approve the mold texturing.
- Detail document for texture refer to “UN-D249”, “UN-D 600”.

### 5.12 Tilt and swivel base

- Tilt angle :  $-5^{\circ} +2/- 0^{\circ}$  (forward)  
 $+20^{\circ} +0/-2^{\circ}$  (backward)
- Tilt for left and right:  
 $| A-B | \leq 4.0\text{MM}$



- Black side and cut side:

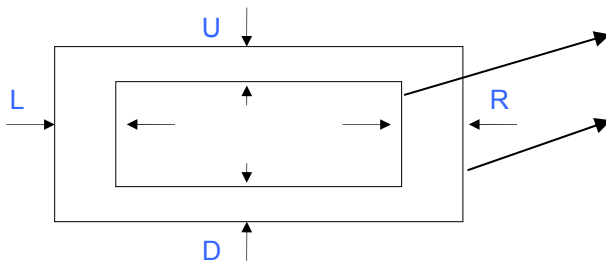

#### 1. Visual area

H:  $| L-R | \leq 1.5 \text{ mm}$

V:  $| U-D | \leq 1.5 \text{ mm}$

#### 2. Black side on the left and right is symmetrical, not cut side.

- Gap between bezel and rear cover 0.4 mm (Typ.)
- Step between bezel and rear cover  
Left, right and top :  $\leq 0.6\text{mm}$  Bottom and corner:  $\leq 1.1\text{mm}$
- "Wobble", "Twist", etc (front to back or side to side)

Whole monitor set shall retain stability within a short time after the applied external force disappear.  
20NT , 6secs (typ.) back to stable.

### 5.13 Kensington Lock

- Must meet Kensington\_slot.spec “TYE-M0004”.

### 5.14 Label

- Carton label should follow Philips requirement.
- Regulatory label follow TPV OTS.
- China RoHS label
- Detail document refer to Philips Engineering Reference Book.

### 5.15 Product dimension / Weight (Refer to SHT 191 )

- Unit dimension : 439(w)\*363(H)\*191(D)
- Packed unit dimension : 490(w)\*375(D)\*145(H)
- Net weight : 3.98Kg
- Gross weight : 4.95Kg.

### 5.16 Transportation

Transportation standards follow TPV standard.

#### 5.16.1 Transportation packages

Packaging and wrapping shall be sufficient to protect the product against damage or loss during shipment from the supplier to the destination specified in the purchase order. All packaging materials are subject to test and evaluation per TPV standard. The cushion material shall be constructed using EPS material.

#### 5.16.2 Transportation Test

Follow TPV standard

#### A. Transportation test specification for all regions Package test

1. Random Vibration test
2. Drop test

### 5.17 Pallet / Container loading

Transportation standards refer to following TPV standard.

- Air shipment -
- Sea container 20'(pallet/slip sheet)
- Sea container 40'(pallet/slip sheet)
- Sea container 40' High Cube (pallet/slip sheet)
- Land 53' MEGA Trailer (pallet/slip sheet)
- Land 53' MEGA Trailer per HQ (pallet/slip sheet)
- Truck shipment-

## 6. Environmental characteristics

The following sections define the interference and susceptibility condition limits that might occur between external environment and the display device.

### 6.1 Susceptibility of display to external environment

Operating

- Temperature : 0 to 40 degree C
- Humidity : 20~90%RH (non-condensed)
- Altitude : 0-10000 ft

Storage

- Temperature : -20 to 60 degree C
- Humidity : 10~90%RH (non-condensed)
- Altitude : 0-30000 ft

Note: Pls also refer to DQE requirements

### 6.2 Transportation tests

Refer to 5.15.2

### 6.3 Display disturbances from external environment

According to IEC 801-2 for ESD disturbances

### 6.4 Display disturbances to external environment

## 7. Reliability

### 7.1 Mean Time Between Failures

System MTBF (Including the LCD panel and CCFL) : Refer to 2.1 panel MTBF

## 8. Quality assurance requirements

### 8.1 Acceptance test

According to MIL-STD-105D Control II level

AQL: 0.4 (major)

1.5 (minor)

(Please also refer to annual quality agreement)

Customer acceptance criteria: UAW0377/00

## 9. Philips' Flat Panel Monitors Pixel Defect Policy

Philips' Flat Panel Monitors Pixel Defect Policy

<b>BRIGHT DOT DEFECTS</b>	<b>ACCEPTABLE LEVEL</b>		
<b>MODEL</b>	<b>190VW9</b>		
1 lit sub-pixel	3		
2 adjacent lit sub-pixels	1		
3 adjacent lit sub-pixels (one white pixel)	0		
Distance between two bright dot defects*	$\geq 25\text{mm}$		
Bright dot defects within 20 mm circle	0		
Total bright dot defects of all type	3		

<b>BLACK DOT DEFECTS</b>	<b>ACCEPTABLE LEVEL</b>		
<b>MODEL</b>	<b>190VW9</b>		
1 dark sub-pixel	5		
2 adjacent dark sub-pixels	2		
3 adjacent dark sub-pixels (one white pixel)	0		
Distance between two black dot defects*	$\geq 15\text{mm}$		
Black dot defects within 20 mm circle*	1		
Total black dot defects of all type	5		

<b>TOTAL DOT DEFECTS</b>	<b>ACCEPTABLE LEVEL</b>		
<b>MODEL</b>	<b>190VW9</b>		
Total bright or black dot defects of all type	5		

\* 1 or 2 adjacent sub-pixel defects = 1 dot defect

Fig 1: Measurement locations of Brightness Uniformity

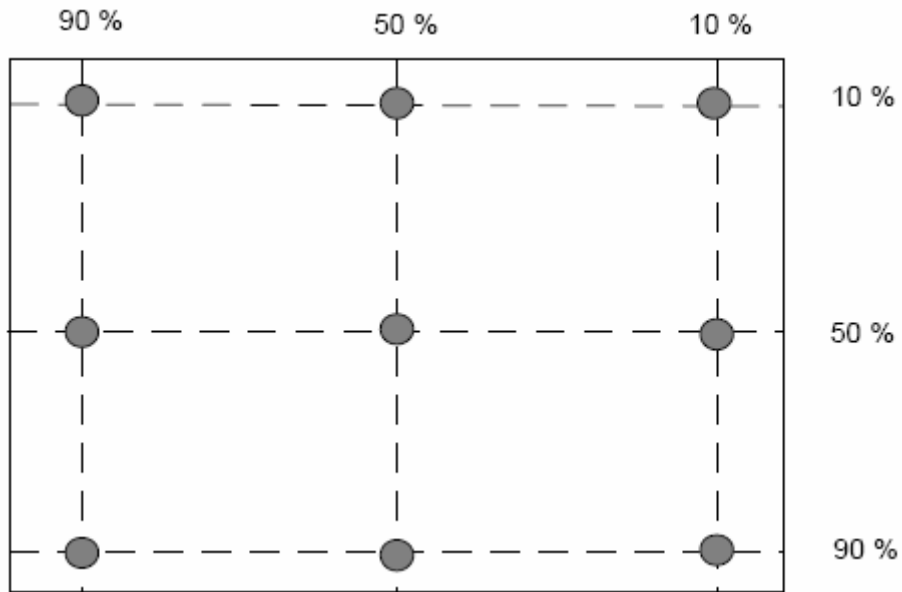


Fig 2: Cross talk pattern

Gray level 46 (64 Gray level)


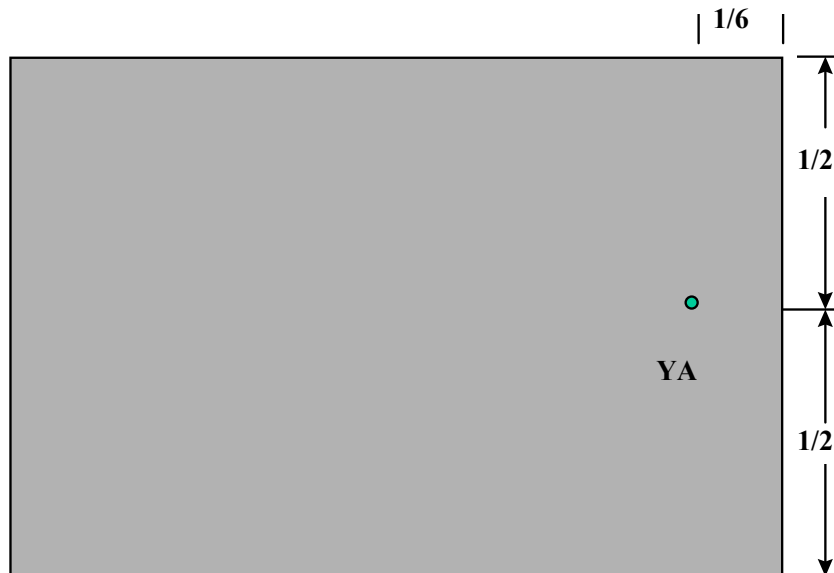



Fig 3: Cross talk Pattern

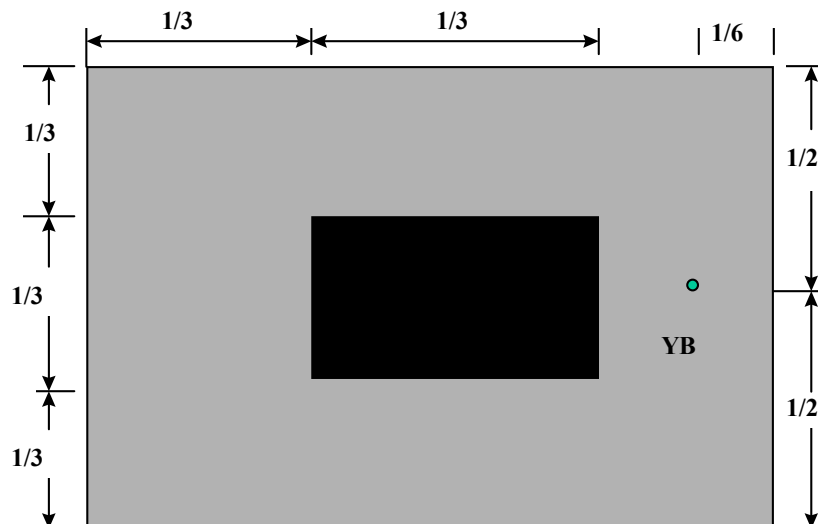Center at Gray level 0 (Black)









## 10. REGULATORY COMPLIANCE


## 10.1 Worldwide Regulatory







Region (RSO)	Country (NSO)	Domain	Safety / EMC / Ergonomics / Standards	Documents	Reference Logo	Applicant	Mandatory	V-Line	Sample Q'ty	Remark
World wide	World wide	Sa	IEC60950-1:2001. Group and national differences of all countries listed in CB Bulletin No. 107A	CB Report, certificate		OEM	Yes	Yes		Manufacture and Applicant is Philips Maximum ambient temperature:40°C
Europe	EUROPE	Sa	European Low Voltage Directives 73/23/EEC and 93/68/EEC, 2004/108/EC	Declaration of Conformity and Identity declaration		OEM	Yes	Yes		





		E	European Electromagnetic Compatibility Directive 2004/108/EC EN55022:2006, EN55024:1998+A1:2001+A2:2003, EN61000-3-2:2006, EN61000-3-3:1995+A1:2001+A2:2005	EMC/CE test report		OEM	Yes	Yes		HDMI have to test PC mode and DVD mode
GERMANY	Sa	EN60950-1:2001	TUV certificate		OEM	Optional	No		Philips is OEM license holder	
	O	LCD: ISO13406-2, pr EN 50279:1998	TUV-ERG certificate and TUV ISO13406-2 report		OEM	Optional	No		Philips is OEM license holder	
	O	GS-Mark / EK1-ITB 2000	TUV-GS certificate		OEM	Optional	No		Philips is OEM license holder	
	O	ISO13406-2	TUV ISO13406-2 certificate		OEM	Optional	No		Philips is OEM license holder	





		O	TUV MPR-II	TUV MPR-II certificate		OEM	Optional	No		Philips is OEM license holder
SWEDEN		Sa	EN60950-1:2001	SEMKO certificate		OEM	Optional	No		Philips is license holder
		O	TCO'99	TCO report and certificate		OEM	Optional	No		To add all sales name into certificate
		O	TCO'03, or TCO'0x supersedes new standard	TCO report and certificate		OEM	Optional	No		To add all sales name into certificate
		O	TCO'06	TCO report and certificate		OEM	Optional	No		To add all sales name into certificate
	Switzerland	Sa	EN60950-1:2001	S+ PZ1 certificate		OEM	Yes	No		Supplier to contact Philips NSO Heidi and apply for Switzerland certification. Supplier to pay approbation cost 2450 CHF each model and each extend model 300 CHF. To provide CB, EMC report, Identity Declaration, DFU, Label, Circuit diagram, PO, Power of Attorney. To add all sales name
	E	EN55020,EN55024, IEC61000-3-2 ,IEC61000-3-3	S+ PZ1 certificate	Yes			No			




									and /00, /05, /69 into certificate.
		O	EMF EN 50392	EN 50392 report			Yes	No	1 set Supplier ship out 1 samples to Netherlands and provide EN50392 report (test fee 750EU)
Eastern Europe	Sa	EN60950-1:2001	Certificate of Conformity		Philips	Yes	Yes	3 sets	Supplier ship out 3 samples to Hungary and pay transportation cost. Supplier to provide CB, EMC report, Identity Declaration, DFU, Label, Circuit diagram.
	E	EN55022,EN55024, IEC61000-3-2 ,IEC61000-3-3	Certificate of Conformity		Philips	Yes	Yes		
RUSSIA	Sa	GOST R 50377-1992	GOST certificate		Philips	Yes	Yes		Supplier to provide CB, EMC, ISO13460-2 report and TCO certificate
ISRAEL	Sa	IS 1121, IEC60950/IEC60950-1	Certificate of Conformity		OEM	Yes	No		Need to provide Israel user manual and Local representative
ISRAEL	E	CISPR22	Certificate of Conformity		OEM	Yes	No		

AP	KOREA	Sa	Korean Safety Control law IEC 60950	EK certificate	 XXXXXX-XXXX	OEM	Yes	No	—	<b>NOT REQUIRED</b>
		E	Regulations laws: EMI 1996-78, 80. EMS 1996-79,81	MIC certificate	 X-XXXX-XX-XXXX(X)	OEM	Yes	No	—	<b>NOT REQUIRED</b>
	SINGAPORE	Sa	IEC60950	PSB certificate	 060433-11	OEM	Yes	Yes		Supplier to provide local representative
	CHINA	Sa	GB4943-2001	CCC certificate		OEM	Yes	Yes		Supplier have to check regulation information on rating label, carter label, user manual to meet all mandatory regulation. Supplier to provide CCC permission of printing
		E	GB9254-1998; 17625.1-2003	CCC certificate		OEM	Yes	Yes		
		O	CSC/G1205-2004	CECP certificate			OEM	Optional	No	
	TAIWAN	Sa	CNS-14336 (IEC 60950-1)	BSMI certificate	 R33048	OEM	Yes	Yes		To add all sales name into certificate
		E	CNS-13438 (CISPR22) Class B	BSMI certificate		OEM	Yes	Yes		
		O	Criteria 18 ( Monitor ) ( LCD )	Green Mark / certificate		OEM	Optional	No		<b>NOT REQUIRED</b>

	AUSTRALIA / NEW-ZEAL AND	E	AS/NZS3548:1995 AS/NZS CISPR22: 2002 Class B	CB, EMC report		OEM	Yes	Yes	1 set	Supplier ship out 1 sample to Australia and pay transportation cost, Supplier to apply for C-Tick through Philips NSO
	Saudi Arabia	Sa	EN60950-1:2001	SASO		OEM	Yes	Yes		
	Saudi Arabia	Sa	EN55022, EN61000-3-2, EN61000-3-3, EN55024	SASO		OEM	Yes	Yes		
	Japan	E	VCCI class B ( CISPR 22 )	VCCI Certificate		OEM	Yes	No		<b>NOT REQUIRED</b>
	Cambodia	Sa	EN60950-1:2001	ISC certificate		OEM	Yes	No		
	Kuwait	Sa	EN60950-1:2001, 'Kuwait Conformity Assurance Scheme' (KUCAS)	KUCAS registration		OEM	Yes	Yes		
<b>NAFTA</b>	USA	Sa	UL 60950-1: 2003	UL certificate, CUL		OEM	Optional	Yes		

		E	FCC Part 15 Class B	FCC report and DOC		OEM	Yes	Yes		To list manufacture in FCC report
		O	Energy Star	EPA test data		OEM	Optional	No		
	CANADA	Sa	CSA C22.2 No 60950	CSA certificate or CUL	 LR58447	OEM	Optional	No		
		E	ICES-003 issue 3	Statement on label		OEM	Yes	Yes		
	MEXICO	Sa	NOM-019-SCFI-1 994	NOM certificate		Philips	Yes	No	2 sets	<b>NOT REQUIRED</b>
LATAM	Argentina	Sa	EN60950-1:2001	TUV S-mark or IRAM		OEM	Yes	No		
	Brazil	Sa	UL 60950-1: 2003	UL certificate or CUL		OEM	Optional	No		
		E	FCC Part 15 Class B	FCC report and DOC		OEM	Yes	Yes		
		O	Energy Star	EPA test data		OEM	Optional	No		
		O	TCO'99	TCO report and certificate		OEM	Optional	No		To add all sales name into certificate
		O	TCO'03	TCO report and certificate		OEM	Optional	No		To add all sales name into certificate
		O	TCO'06	TCO report and certificate		OEM	Optional	No		To add all sales name into certificate

South Africa	SOUTH AFRICA	Sa	SABS IEC 60950 and IEC 60950-1	Certificate of Conformity		Philips	Yes	Yes		Supplier to provide CB, EMC report
		E	EN55022 or Crisper 22	Certificate of Conformity		Philips	Yes	Yes		

Sa = Safety

E = Electromagnetic Compatibility

O = Other which including recycling, energy saving, ergonomics, Green Mark

X=X-Ray

Remark:

1. Supplier to provide all approbation documents, samples before CR
2. Supplier to pay approbation samples and transportation cost.
3. Suppliers to pay Switzerland approbation cost 2450 CHF and provide EN50392 report.
4. HDMI has to test PC mode if user manual have HDMI connect to PC function
5. Supplier to provide EMC, safety report if monitor with portrait and landscape function
6. AC/DC adaptors have to meet California Energy Commission requirement
7. Suppliers have to support Philips NSO to get local approbation.
8. Supplier have to check regulation information on rating label, carton label, user manual to meet all mandatory regulation
9. Suppliers need to add Philips sales name, model no into BSMI, TCO, EK, MIC certificate
10. Suppliers have to apply all mandatory regulation based on sales country.

**10.2 EMC Requirements**

Supplier DVT EMI test result must be submitted prior to DVT samples delivery, and PVT EMI test result must be submitted again prior to PVT samples delivery, which also has to meet Philips' immunity testing specification.

**10.3 RoHS**

Restriction on the use of certain hazardous substances.

Lead, Cadmium, Mercury, Hexavalent Chromium, Polybrominated Biphenyl (PBB) and Polybrominated Biphenyl Ether (PBDE)(flame retardant).

**10.4 WEEE**

Producer (Philips) responsible for retailer take back schemes and recycling.

--System implemented.

--Collection and recycle targets.

**10.5 Ongoing Regulatory**

There's a possibility that other regulatory certificates will be required during the life of the product. It is the responsibility of the supplier to provide related documentation.

## TELEVISION/MONITOR SAFETY GUIDELINES FOR THE PROFESSIONAL SERVICE TECHNICIAN

**Safety Checks**

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

**Fire and Shock Hazard**

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.
2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.
3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.
4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.
5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.
6. Critical components having special safety characteristics are identified with an asterisk by the Ref. No. in the parts list and enclosed within a broken line \* (where several critical components are grouped in one area) along with the safety symbols on the schematic diagrams and/or exploded views.
7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.
8. Many electronic products use a polarized ac line cord (one wide pin on the plug.) Defeating this safety feature may create a potential hazard to the service and the user. Extension cords which do not incorporate the polarizing feature should never be used.
9. After reassembly of the unit, always perform a leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc. to be sure the unit may be safely operated without danger of electrical shock.

\* Broken line

**Implosion**

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.
2. Use only replacement tubes specified by the manufacturer.

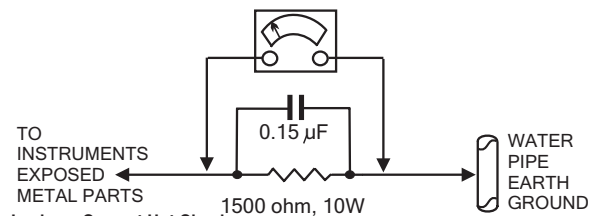
**X-radiation**

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.
2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.
3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.
4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value—no higher—for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.
5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.

6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.
7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.
8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

**Leakage Current Cold Check**

1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.
2. Turn on the power switch.
3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

**Leakage Current Hot Check**

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.
2. Connect a 1.5k, 10w resistor paralleled by a 0.15uf. capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown above.
3. Use an ac voltmeter with at least 5000 ohms volt sensitivity to measure the potential across the resistor.
4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5 milliamps. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.
5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

**Picture Tube Replacement**

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

**Parts Replacement**

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards.

**WARNING:** Before removing the CRT anode cap, turn the unit **OFF** and short the HIGH VOLTAGE to the CRT DAG ground.  
**SERVICE NOTE:** The CRT DAG is not at chassis ground.