

Service
Service
Service



Service Manual

Horizontal Frequency
30- 83KHz

TABLE OF CONTENTS

| Description | Page | Description | Page |
|--------------------------------------|------|--|------|
| Table Of Contents..... | 1 | 6. Schematic Diagram..... | 20 |
| Revision List..... | 2 | 6.1 Main Board..... | 20 |
| Important Safety Notice..... | 3 | 6.2 Power Board..... | 24 |
| 1. Monitor Specifications..... | 4 | 7. PCB Layout..... | 26 |
| 2. LCD Monitor Description..... | 5 | 7.1 Main Board..... | 26 |
| 3. Operation instructions..... | 6 | 7.2 Power Board..... | 28 |
| 3.1 General Instructions..... | 6 | 7.3 Key Board..... | 30 |
| 3.2 Control buttons..... | 6 | 8. Wiring Diagram..... | 31 |
| 3.3 Adjusting the Picture..... | 8 | 9. Mechanical Instructions..... | 32 |
| 3.4 Connecting to your PC..... | 11 | 10. Trouble shooting..... | 37 |
| 4. Input/Output Specification..... | 12 | 11. Repair Flow Chart..... | 39 |
| 4.1 Input Signal Connector..... | 12 | 12. ISP Instructions..... | 44 |
| 4.2 Factory Preset Display Mode..... | 12 | 13. DDC Instructions..... | 50 |
| 4.3 Pixel Defect Policy..... | 13 | 14. White Balance, Luminance Adjustment..... | 57 |
| 5. Block Diagram..... | 15 | 15. Spare Parts List..... | 58 |
| 5.1 Monitor Exploded View..... | 15 | 16. Different Parts List..... | 70 |
| 5.2 Software Flow Chart..... | 16 | 17. General Product Specification..... | 79 |
| 5.3 Electrical Block Diagram..... | 18 | | |

SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

GB 3138 106 10516

Important Safety Notice

Proper service and repair is important to the safe, reliable operation of all Philips Company Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

Hereafter throughout this manual, Philips Company will be referred to as Philips.

WARNING

Use of substitute replacement parts, which do not have the same, specified safety characteristics may create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design.

Servicer assumes all liability.

FOR PRODUCTS CONTAINING LASER:

DANGER-Invisible laser radiation when open. AVOID DIRECT EXPOSURE TO BEAM.

CAUTION-Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION -The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body is grounded through wristband.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel becomes dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

1. Monitor Specifications


| | | |
|------------------------------|-----------------------|---|
| LCD Panel | Screen type | Active matrix - TFT LCD |
| | Size | 430mm (17.0") |
| | Pixel pitch | 0.264mm(H) x 0.264mm(V) |
| | Response time | 8 ms |
| Input | Video | R, G, B Analog Interface |
| | Separate Sync | TTL level, input impedance 2.2k OHM terminate |
| | Horizontal Frequency | 30kHz – 83kHz |
| | Vertical refresh rate | 56 - 76Hz |
| Display Colors | | 16.2 M |
| Video dot rate | | 140 MHz |
| Maximum Resolution | | 1280 x 1024 at 76Hz (analog input) |
| Recommended Resolution | | 1280 x 1024 at 60Hz (analog input) |
| Plug & Play | | VESA DDC2B |
| Power Consumption | | Power on: < 30 W Power off: < 1 W |
| Input Connector | | D -Sub 15pin |
| Input Video Signal | | 0.7 Vp-p, input impedance, 75 ohm @DC |
| Tilt | | -5° ~ 25° |
| Maximum Screen Size | | Horizontal: 337.9mm;Vertical: 270.3 mm |
| Power Source | | 100-240 VAC, 50/60 Hz |
| Environmental Considerations | | Operating Temp: 5°C to 40°C Storage Temp.: -20°C to 60°C Relative Humidity: 20%-80% Max |
| Weight (Net) | | 4.7kg |
| Cabinet color | | 170S7FG: Light Gray 170S7FB: Black 170S7FS: Silver |

2. LCD Monitor Description

The LCD MONITOR will contain a main board, PWPC board, keypad board, which house the flat panel control logic, brightness control logic and DDC.

The power board will provide AC to DC Inverter voltage to drive the backlight of panel and the main board chips each voltage.

Monitor Block Diagram

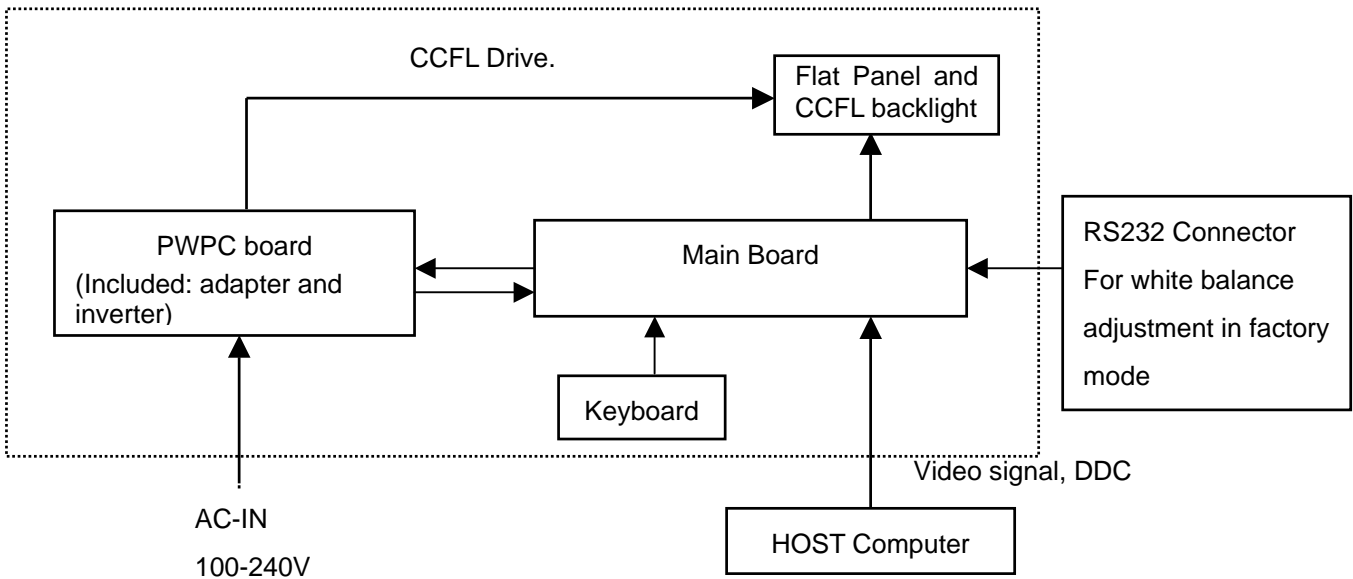

3. Operation instructions



3.1 General Instructions






Press the power button to turn the monitor on or off. The other control buttons are located at front panel of the monitor. By changing these settings, the picture can be adjusted to your personal preferences.

- The power cord should be connected.
- Connect the video cable from the monitor to the video card.
- Press the power button to turn on the monitor, the power indicator will light up.

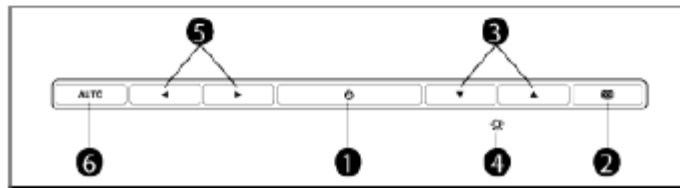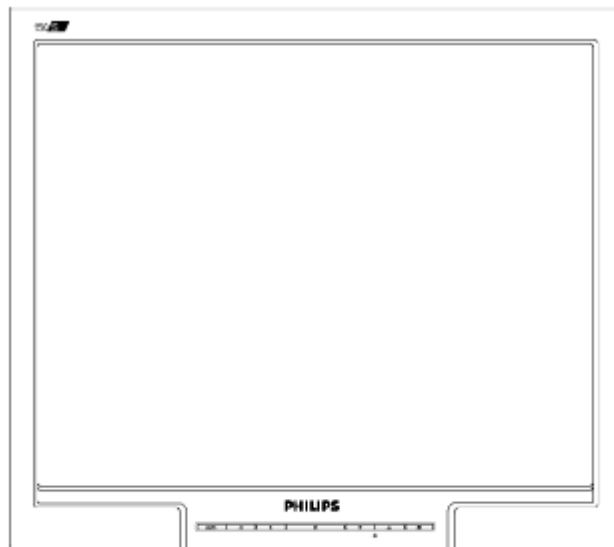
3.2 Control Buttons

Front View



- 1  To switch monitor's power On and Off
- 2  To access OSD menu
- 3  To adjust the OSD
- 4  To adjust brightness of the display
- 5  To adjust the OSD
- 6 **AUTO** Automatically adjust the horizontal position, vertical position, phase and clock settings.

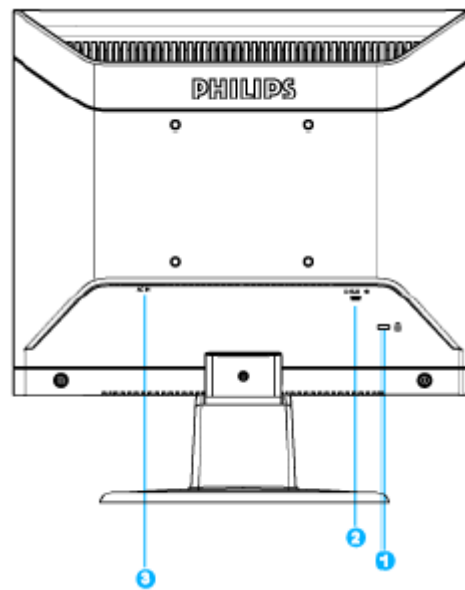


Back View




- 1 Kensington anti-thief lock
- 2 VGA input
- 3 AC power input

3.3 Adjusting the Picture

This is a feature in all Philips LCD monitors. It allows an end user to adjust screen performance of the monitors directly through an on-screen instruction window. The user interface provides user-friendliness and ease-of-use when operating the monitor.


When you press the  button on the front control of your monitor, the On-Screen Display (OSD) main controls window will pop up and you can then start making adjustments to your monitor's various features. Use the  or the  keys to make your adjustments.

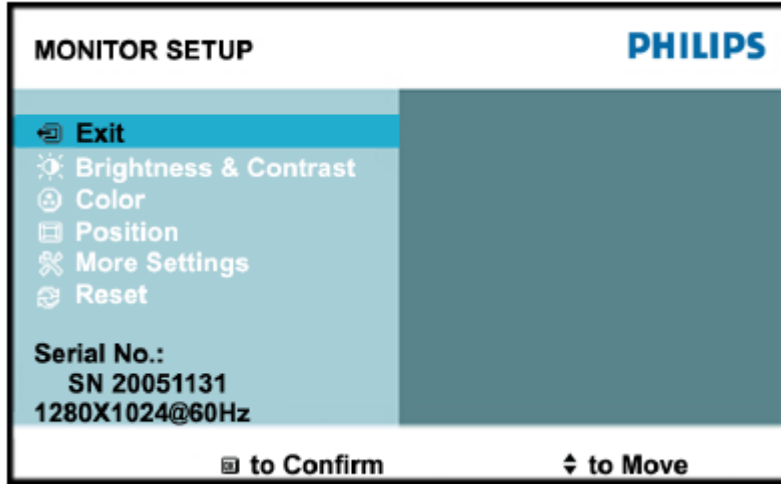


The OSD tree

Below is an overall view of the structure of the On-Screen Display. You can use this as a reference when you want to work your way around the different adjustments later on.


Only available for Europe Model

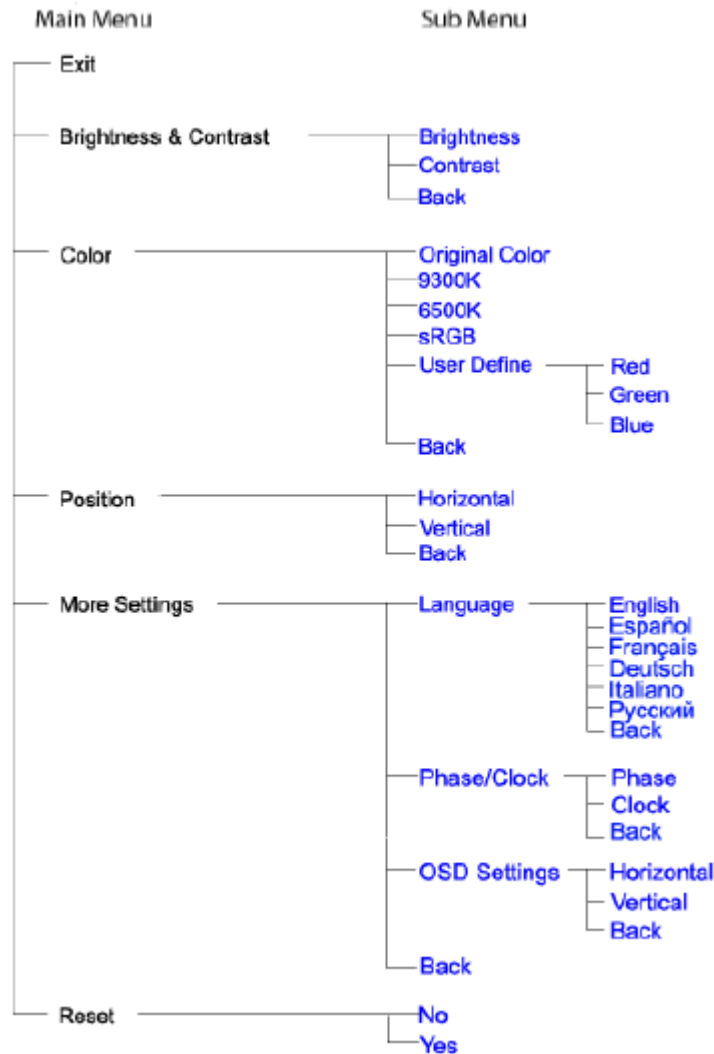

Only available for Nafta Model


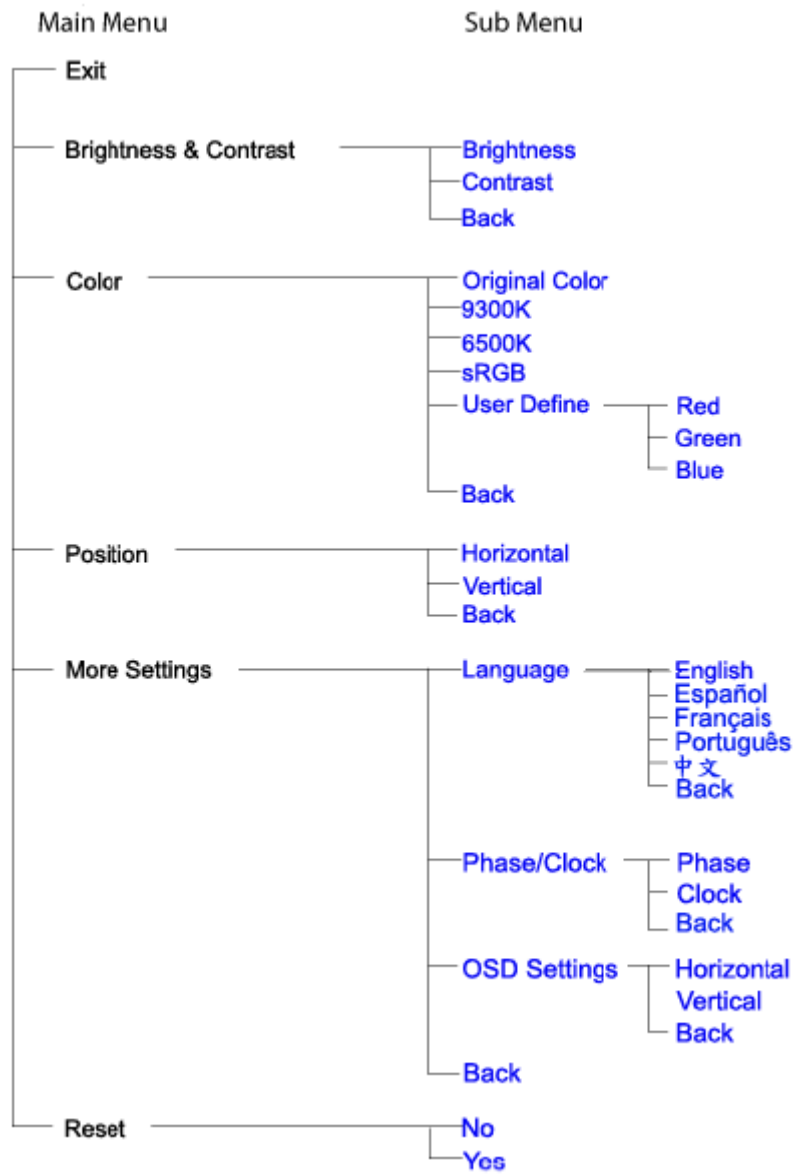


Only available for Asia Pacific Model

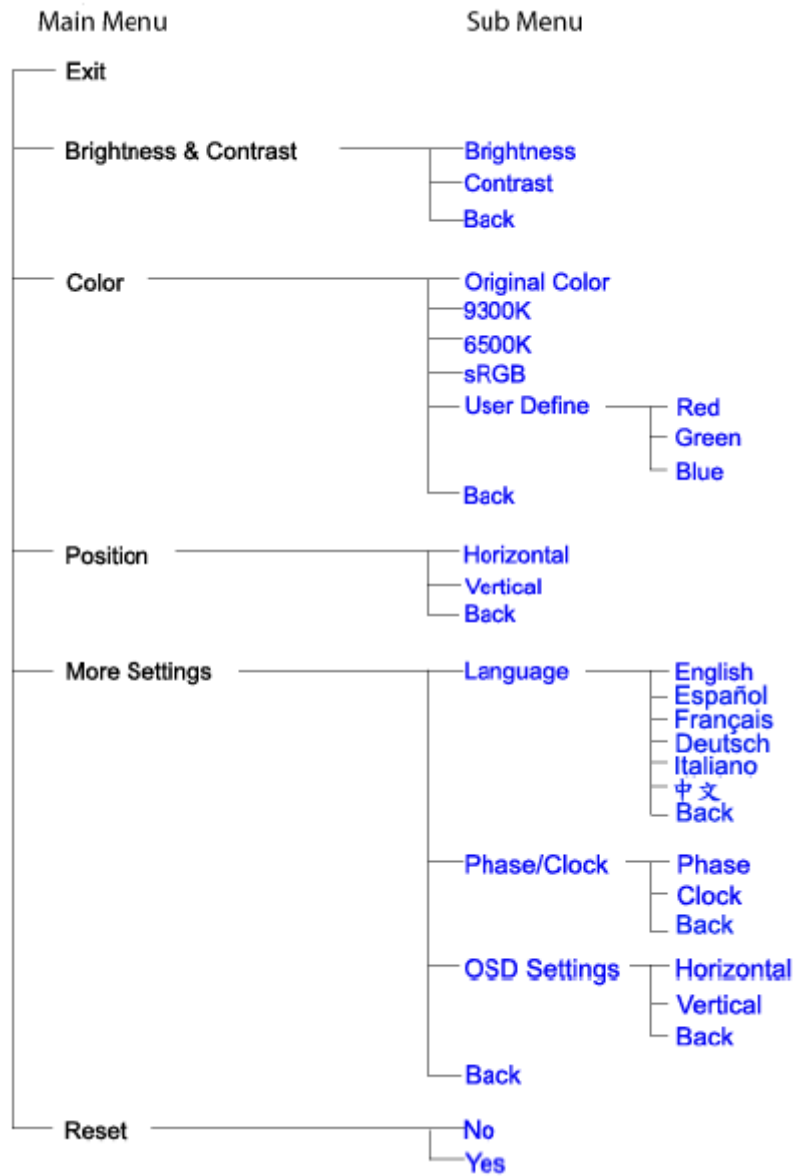

3.4 Connecting to the PC

1) Connect the power cord to the back of the monitor firmly. (Philips has pre-connected) VGA cable for the first installation.)

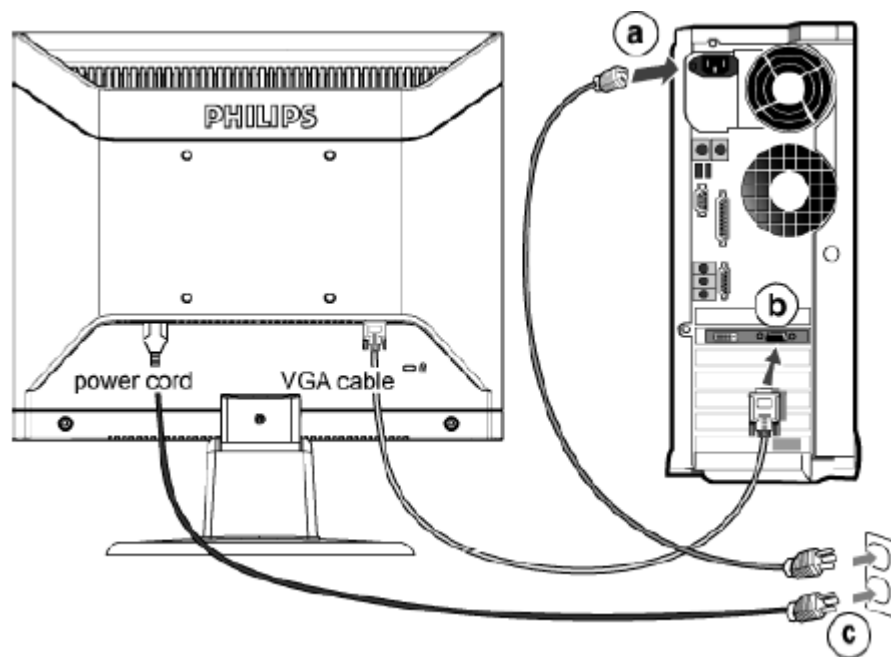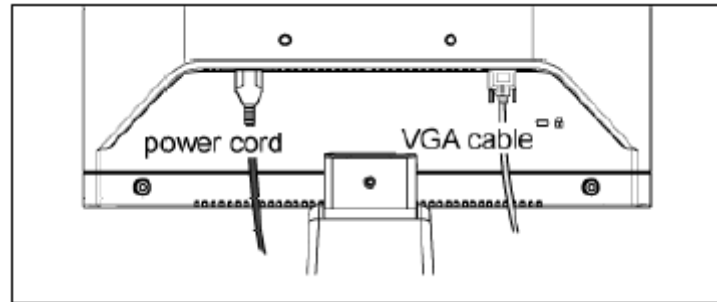

2) Connect to PC

- (a) Turn off your computer and unplug its power cable.
- (b) Connect the monitor signal cable to the video connector on the back of your computer.
- (c) Plug the power cord of your computer and your monitor into a nearby outlet.
- (d) Turn on your computer and monitor. If the monitor displays an image, installation is complete.

4. Input/Output Specification

4.1 Input Signal Connector

| Pin NO. | Description | Pin NO. | Description |
|----------------------|-------------------------|---------|------------------------|
| 1. | Red Video input | 9. | DDC +5V |
| 2. | Green Video input (SOG) | 10. | Logic GND |
| 3. | Blue Video input | 11. | Ground |
| 4. | Sense (GND) | 12. | Serial data line (SDA) |
| 5. | Cable Detect | 13. | H.sync/H + V.sync |
| 6. | Red Video Ground | 14. | V.Sync |
| 7. | Green Video Ground | 15. | Data Clock Line (SCL) |
| 8. | Blue Video Ground | | |
| VGA Connector layout | | | |
| | | | |


4.2 Factory Preset Display Modes

| H. freq (kHz) | Resolution | V. freq (Hz) |
|---------------|------------|--------------|
| 31.469 | 720*400 | 70.087 |
| 31.469 | 640*480 | 59.940 |
| 37.861 | 640*480 | 72.809 |
| 37.500 | 640*480 | 75.000 |
| 35.156 | 800*600 | 56.250 |
| 37.879 | 800*600 | 60.317 |
| 48.077 | 800*600 | 72.188 |
| 46.875 | 800*600 | 75.000 |
| 48.363 | 1024*768 | 60.004 |
| 56.476 | 1024*768 | 70.069 |
| 60.023 | 1024*768 | 75.029 |
| 67.500 | 1152*870 | 75.000 |
| 60.000 | 1280*960 | 60.000 |
| 63.981 | 1280*1024 | 60.020 |
| 79.976 | 1280*1024 | 75.025 |
| 35.000 | 640*480 | 67.000 |
| 49.700 | 832*624 | 75.000 |

4.3 Pixel Defect Policy

Philips' Flat Panel Monitors Pixel Defect Policy

Philips strives to deliver the highest quality products. We use some of the industry's most advanced manufacturing processes and practice stringent quality control. However, pixel or sub pixel defects on the TFT LCD panels used in flat panel monitors are sometimes unavoidable. No manufacturer can guarantee that all panels will be free from pixel defects, but Philips guarantees that any monitor with an unacceptable number of defects will be repaired or replaced under warranty. This notice explains the different types of pixel defects and defines acceptable defect levels for each type. In order to qualify for repair or replacement under warranty, the number of pixel defects on a TFT LCD panel must exceed these acceptable levels. For example, no more than 0.0004% of the sub pixels on a 17" XGA monitor may be defective. Furthermore, Philips sets even higher quality standards for certain types or combinations of pixel defects that are more noticeable than others. This policy is valid worldwide.

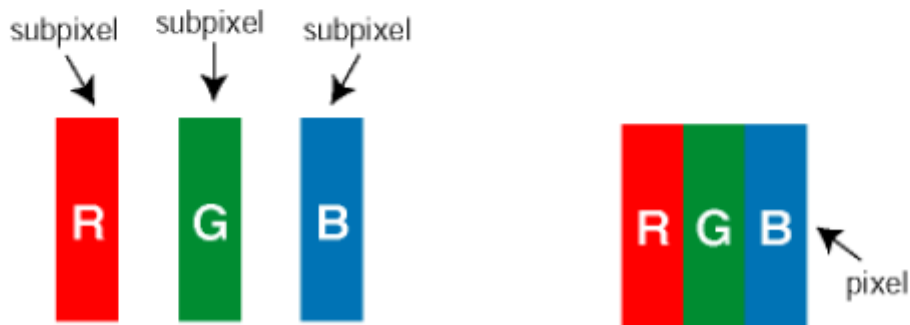

Pixels and Sub pixels

A pixel, or picture element, is composed of three sub pixels in the primary colors of red, green and blue. Many pixels together form an image. When all sub pixels of a pixel are lit, the three colored sub pixels together appear as a single white pixel. When all are dark, the three colored sub pixels together appear as a single black pixel. Other combinations of lit and dark sub pixels appear as single pixels of other colors.

Types of Pixel Defects

Pixel and sub pixel defects appear on the screen in different ways. There are two categories of pixel defects and several types of sub pixel defects within each category.

Bright Dot Defects Bright dot defects appear as pixels or sub pixels that are always lit or 'on'. That is, a *bright dot* is a sub-pixel that stands out on the screen when the monitor displays a dark pattern. There are the types of bright dot defects:



One lit red, green or blue sub pixel

Two adjacent lit sub pixels:


- Red + Blue = Purple
- Red + Green = Yellow
- Green + Blue = Cyan (Light Blue)

Three adjacent lit sub pixels (one white pixel)

Black Dot Defects Black dot defects appear as pixels or sub pixels that are always dark or 'off'. That is, a *dark dot* is a sub-pixel that stands out on the screen when the monitor displays a light pattern. These are the types of black dot defects:



One dark sub pixel



Two or three adjacent dark sub pixels

Proximity of Pixel Defects

Because pixel and sub pixels defects of the same type that are near to one another may be more noticeable, Philips also specifies tolerances for the proximity of pixel defects.

Pixel Defect Tolerances

In order to qualify for repair or replacement due to pixel defects during the warranty period, a TFT LCD panel in a Philips flat panel monitor must have pixel or sub pixel defects exceeding the tolerances listed in the following tables.

| BRIGHT DOT DEFECTS | | ACCEPTABLE LEVEL |
|--|--|------------------|
| MODEL | | 170S7 |
| 1 lit subpixel | | 3 |
| 2 adjacent lit subpixels | | 1 |
| 3 adjacent lit subpixels (one white pixel) | | 0 |
| Distance between two bright dot defects* | | >15mm |
| Total bright dot defects of all types | | 3 |

| BLACK DOT DEFECTS | | ACCEPTABLE LEVEL |
|---|--|------------------|
| MODEL | | 170S7 |
| 1 dark subpixel | | 4 |
| 2 adjacent dark subpixels | | 2 |
| 3 adjacent dark subpixels | | 0 |
| Distance between two black dot defects* | | >15mm |
| Total black dot defects of all types | | 4 |


| TOTAL DOT DEFECTS | | ACCEPTABLE LEVEL |
|--|--|------------------|
| MODEL | | 170S7 |
| Total bright or black dot defects of all types | | 5 |

Note: * 1 or 2 adjacent sub pixel defects = 1 dot defect


Your Philips monitor is ISO13406-2 Compliant

5. Block Diagram

5.1 Monitor Exploded View

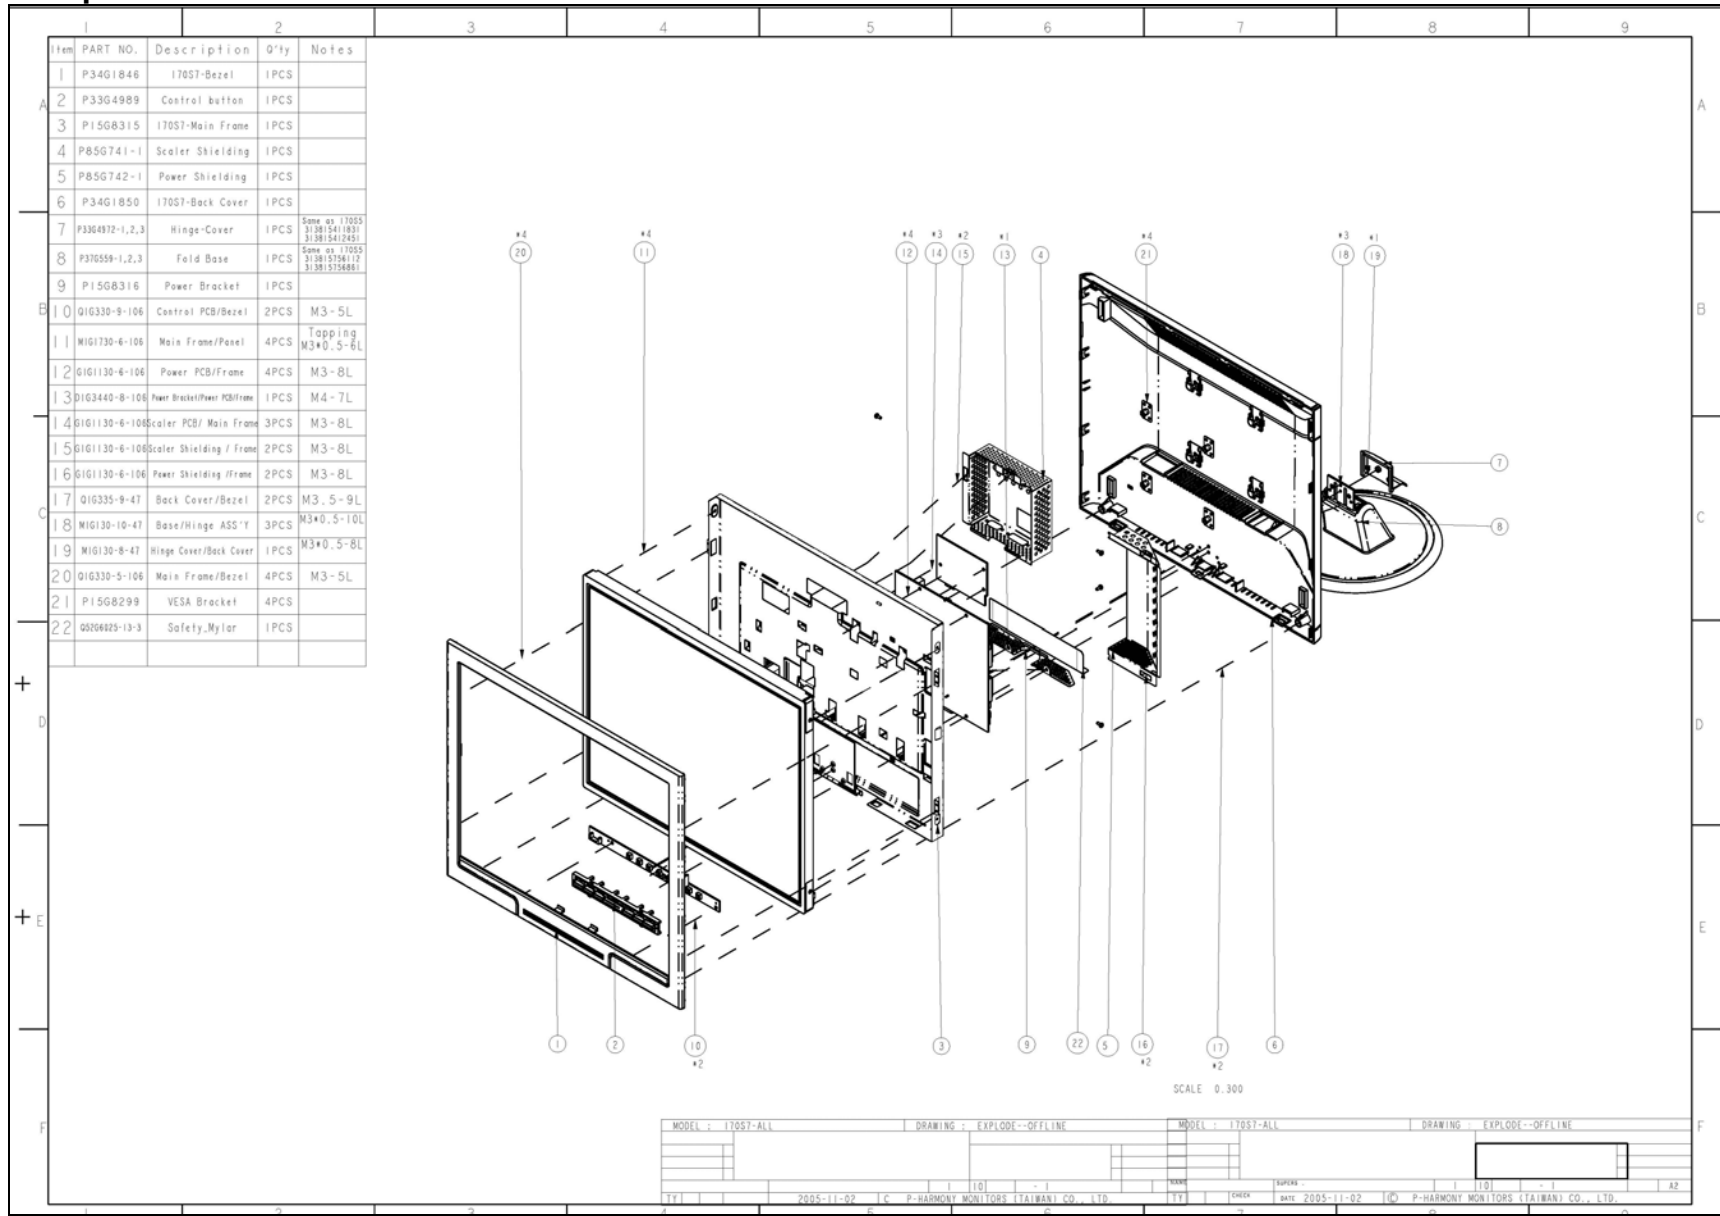

5.2 Software Flow Chart

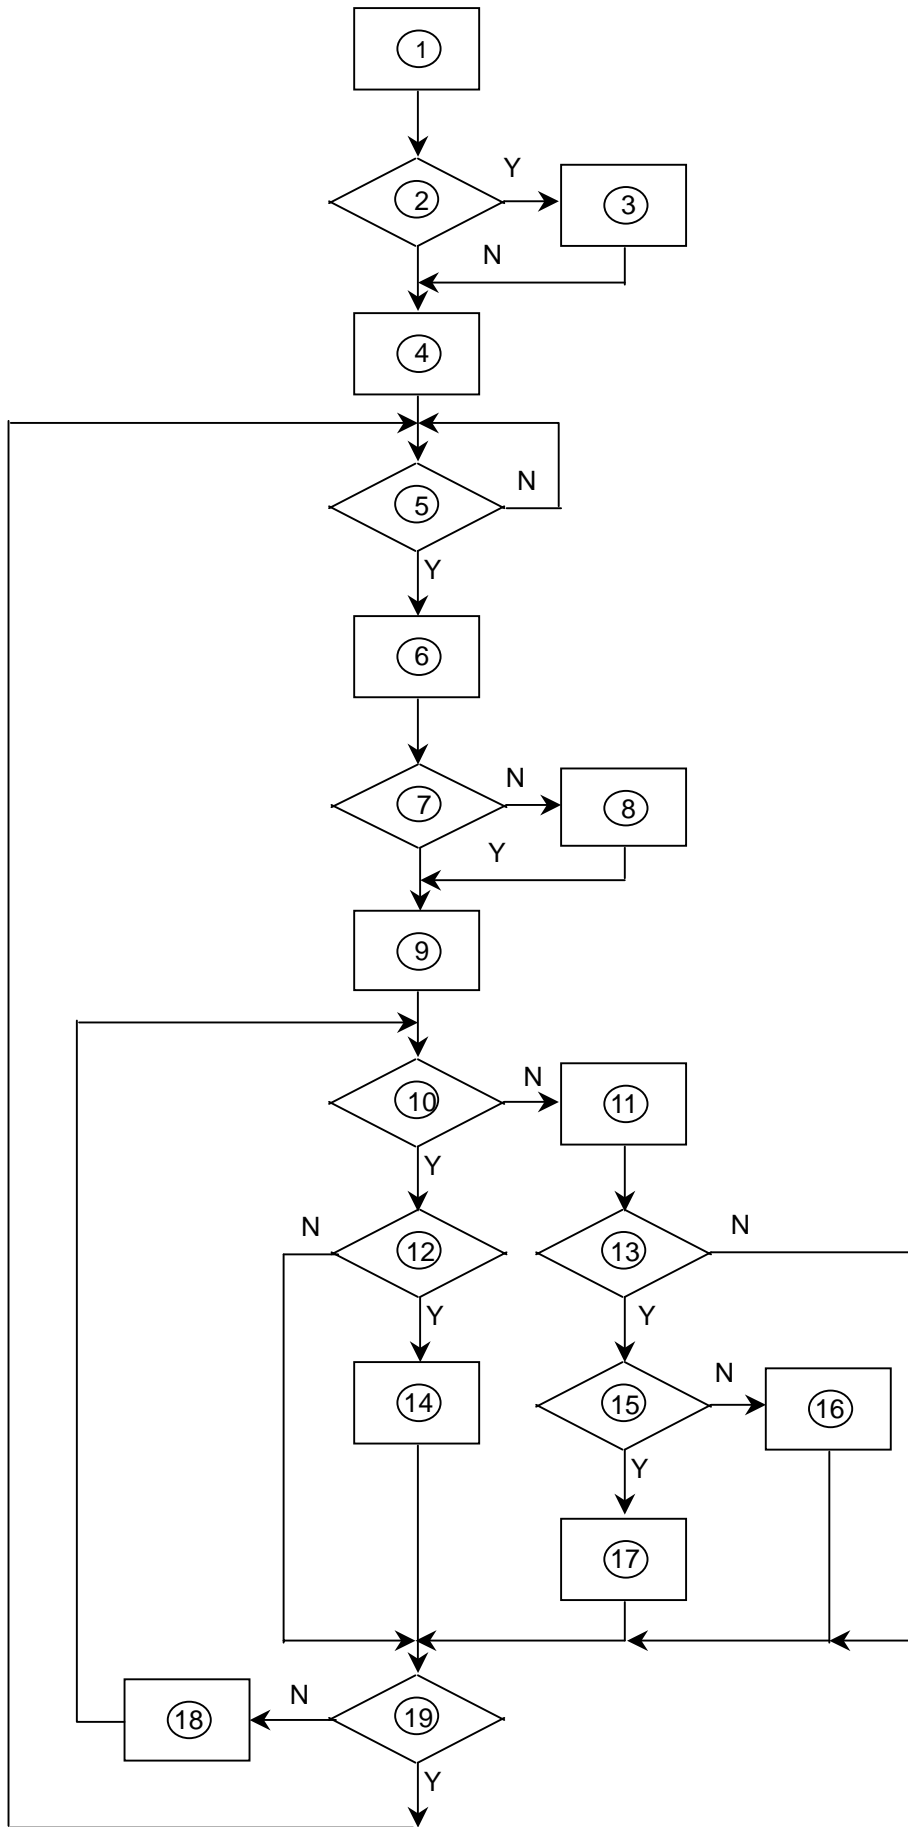


- 1) MCU Initializes.
- 2) Is the EEprom blank?
- 3) Program the EEprom by default values.
- 4) Get the PWM value of brightness from EEprom.
- 5) Is the power key pressed?
- 6) Clear all global flags.
- 7) Are the AUTO and SELECT keys pressed?
- 8) Enter factory mode.
- 9) Save the power key status into EEprom.

Turn on the LED and set it to green color. Scalar initializes.


- 10) In standby mode?
- 11) Update the lifetime of back light.
- 12) Check the analog port, are there any signals coming?
- 13) Does the scalar send out an interrupt request?
- 14) Wake up the scalar.
- 15) Are there any signals coming from analog port?
- 16) Display "No connection Check Signal Cable" message. And go into standby mode after the message disappears.
- 17) Program the scalar to be able to show the coming mode.
- 18) Process the OSD display.
- 19) Read the keyboard. Is the power key pressed?

5.3 Electrical Block Diagram

5.3.1 Main Board

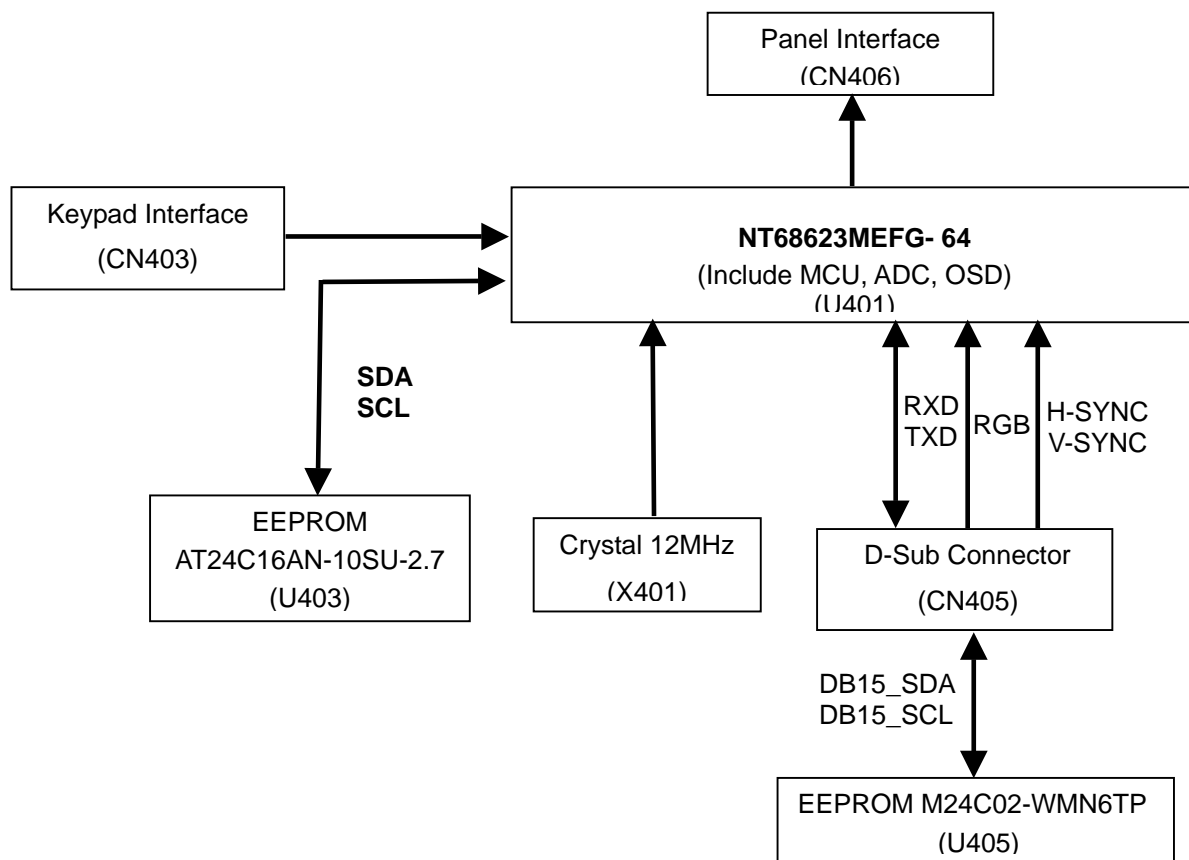


5.3.2 Inverter/Power Board

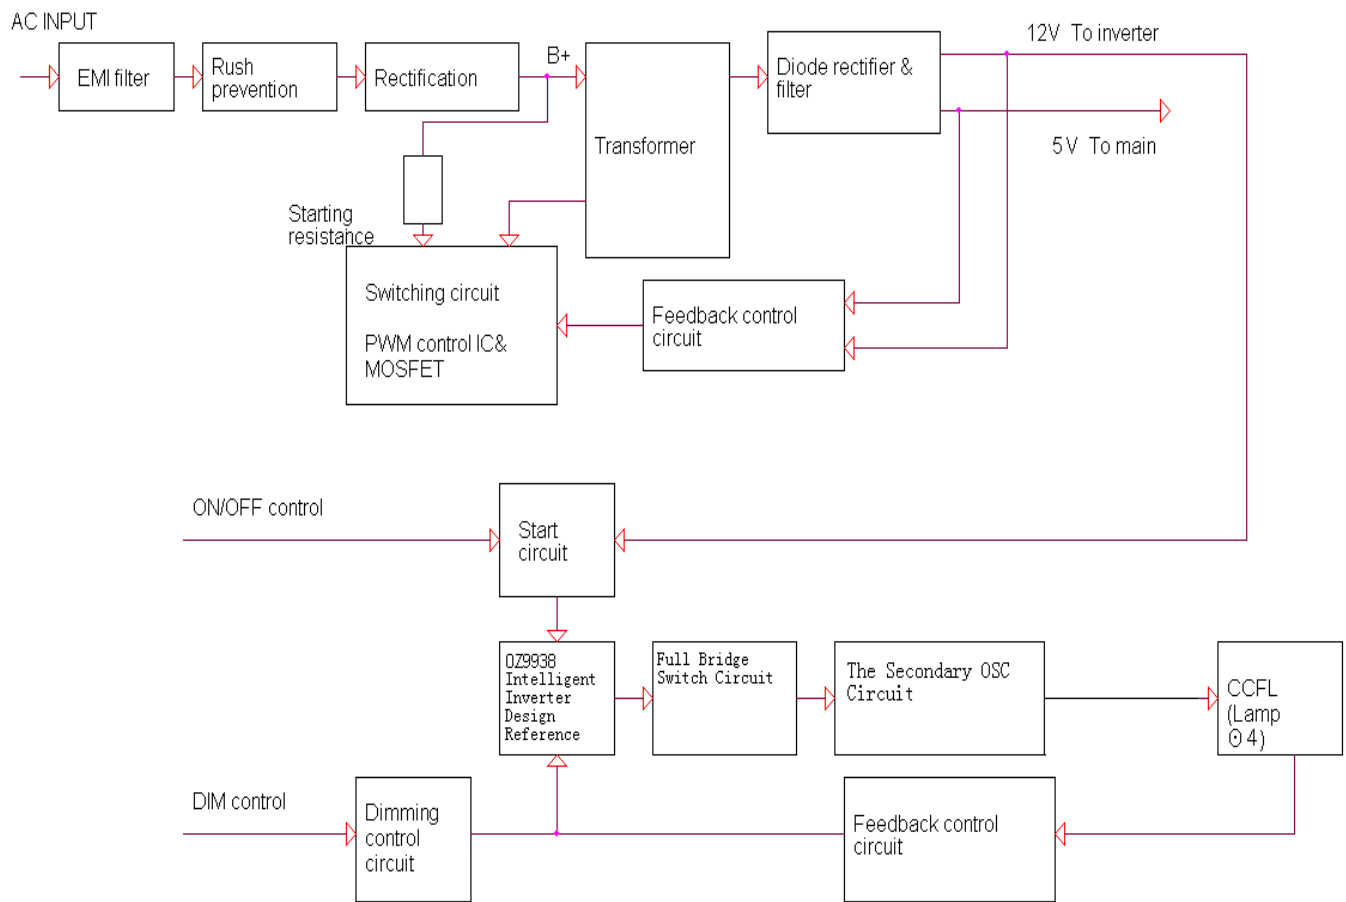


6. Schematic Diagram

6.1 Main Board


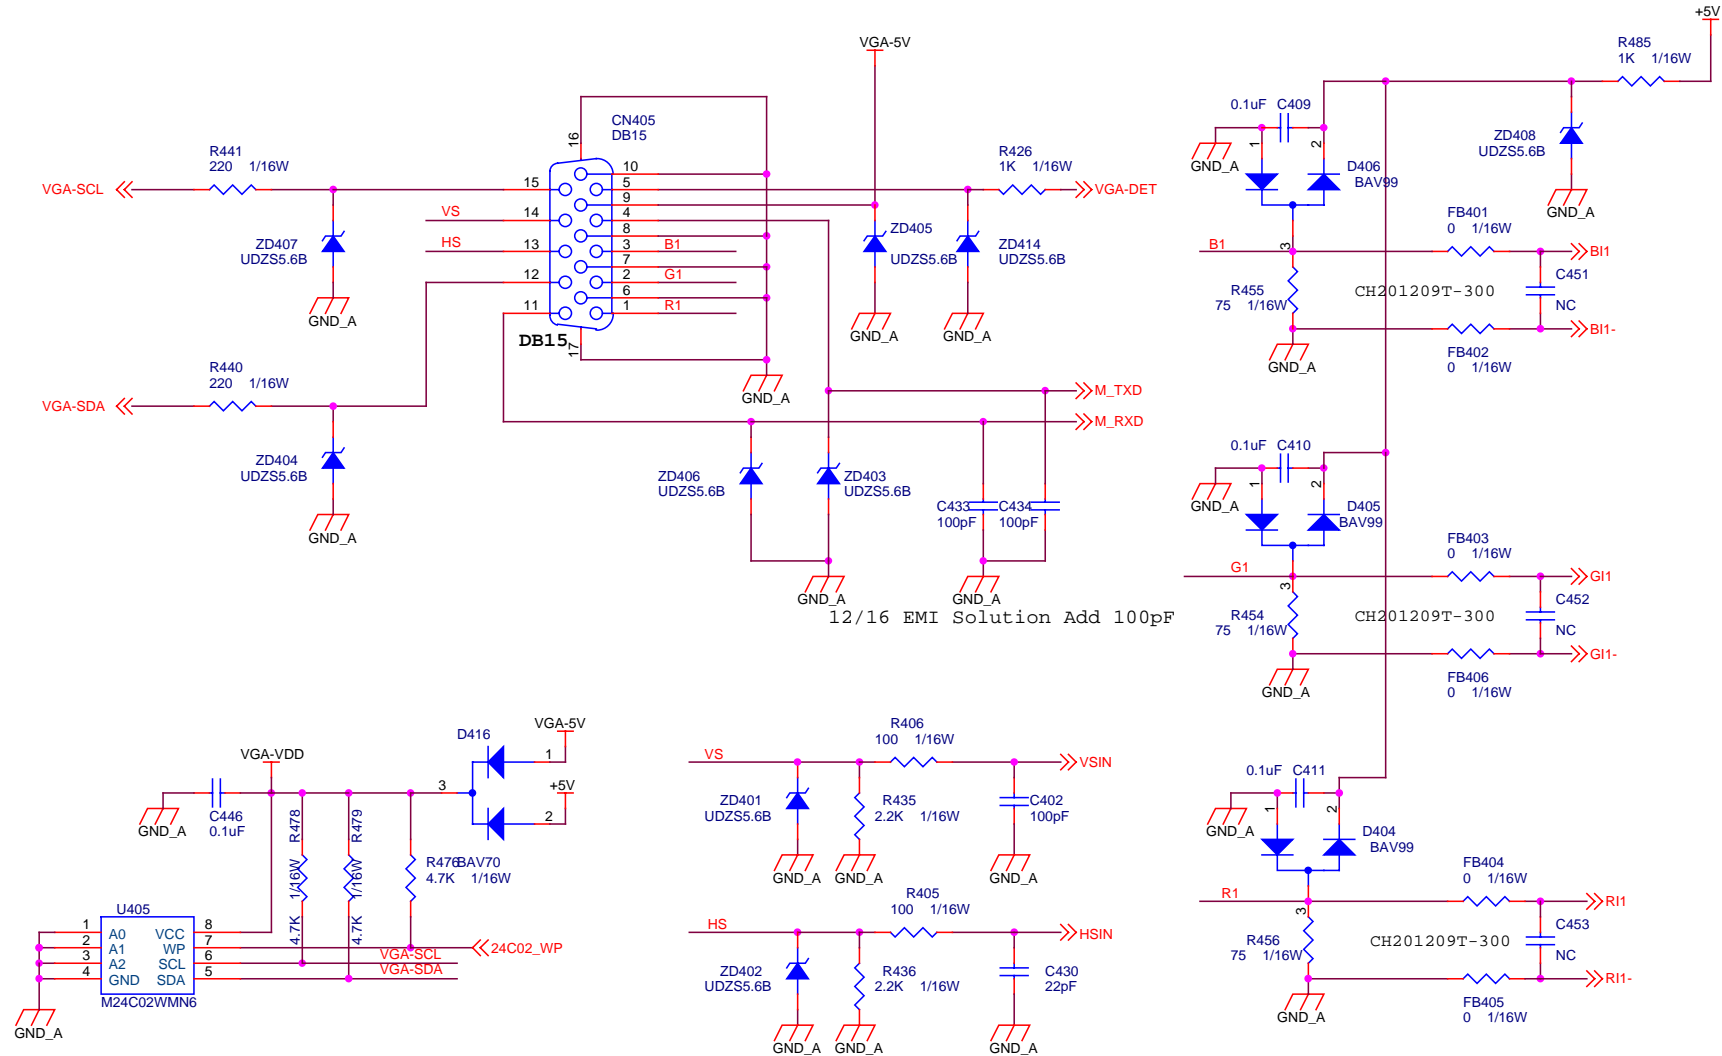


| | | |
|--------------------------------|-----------------|--------|
| Title | | |
| 715G1712-1 | | |
| Size A4 | Document Number | Rev B |
| PHILIPS 170S-ADC Input | | |
| Date: Thursday, March 02, 2006 | Sheet | 5 of 5 |

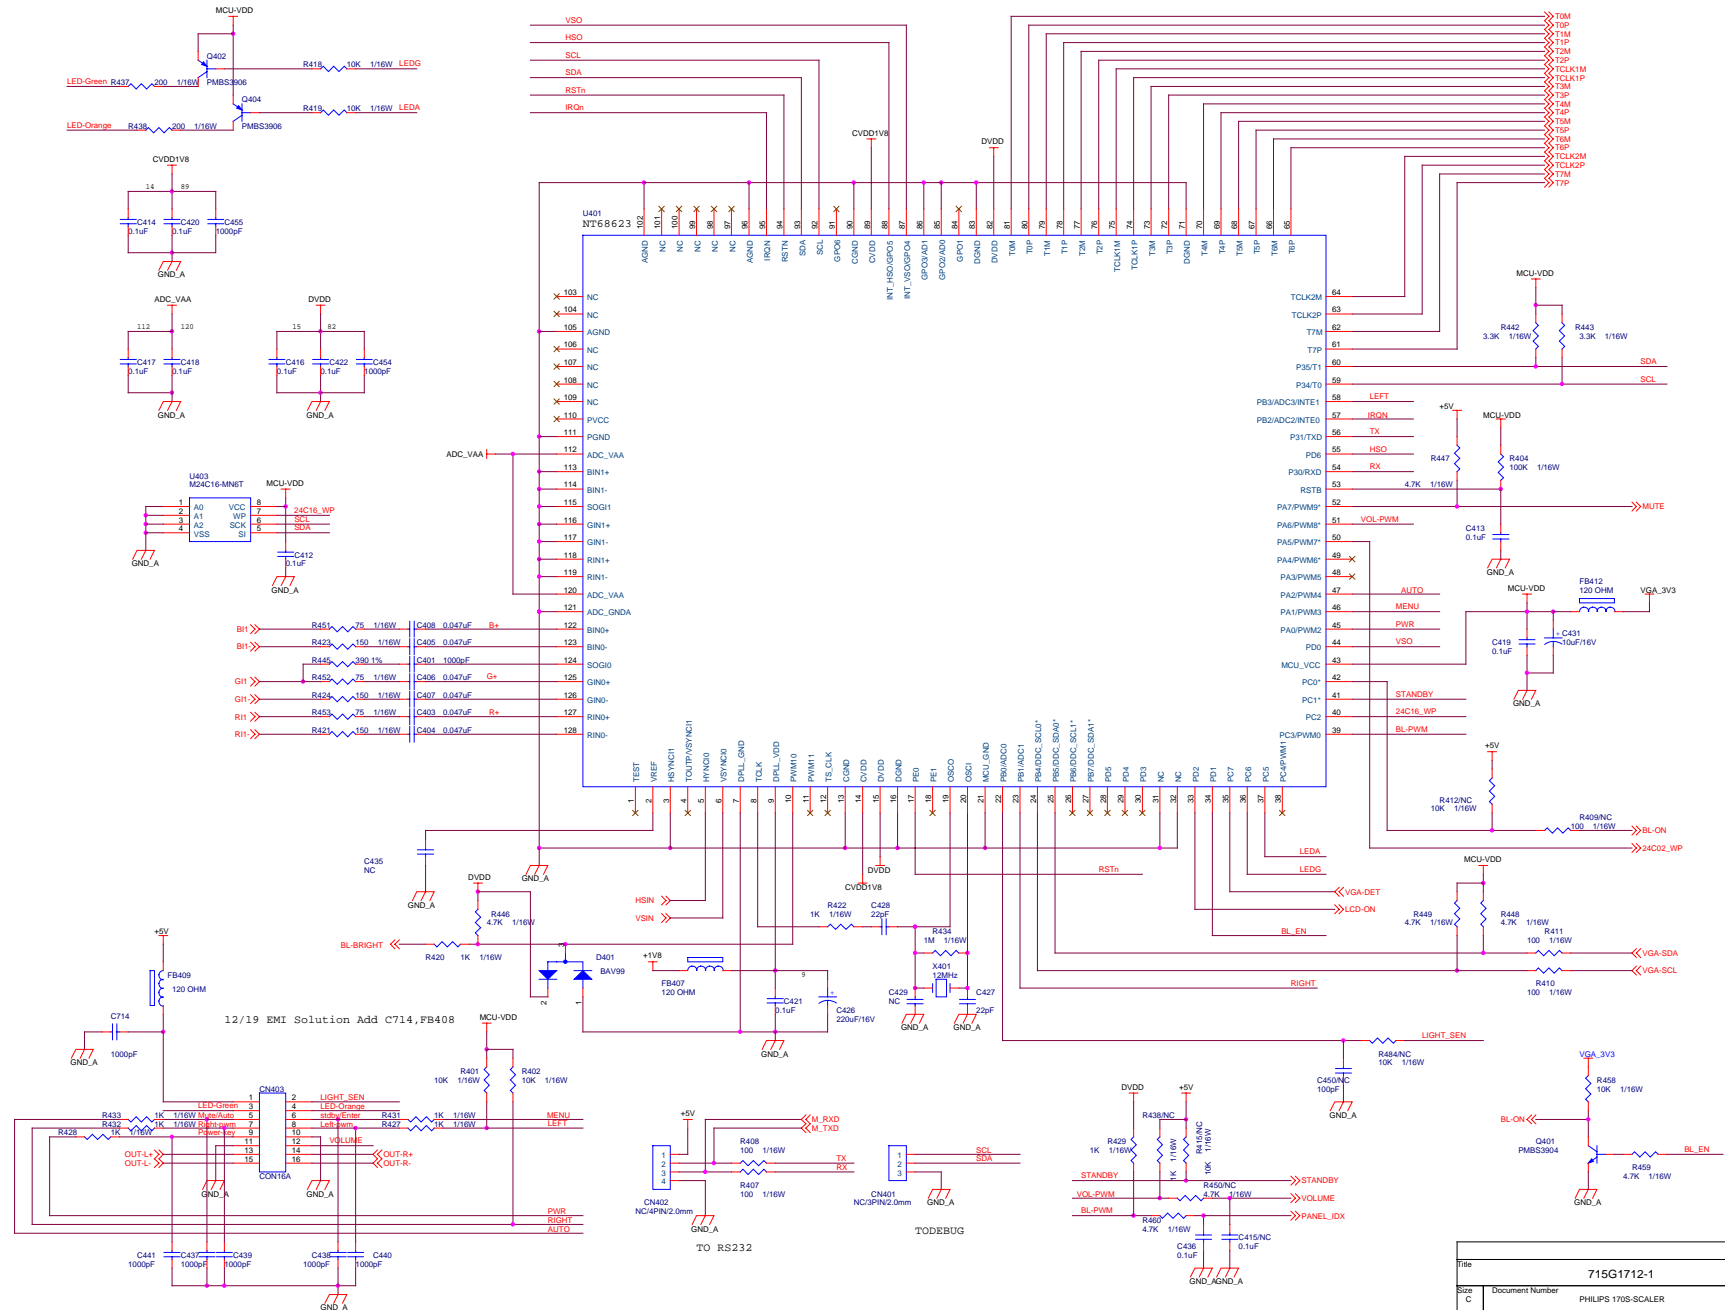


| | | | |
|-------|--------------------------|---------------------|--------|
| Title | | 715G1712-1 | |
| Size | Document Number | PHILIPS 170S-SCALER | Rev |
| C | | | B |
| Date | Thursday, March 02, 2006 | Sheet | 4 of 6 |



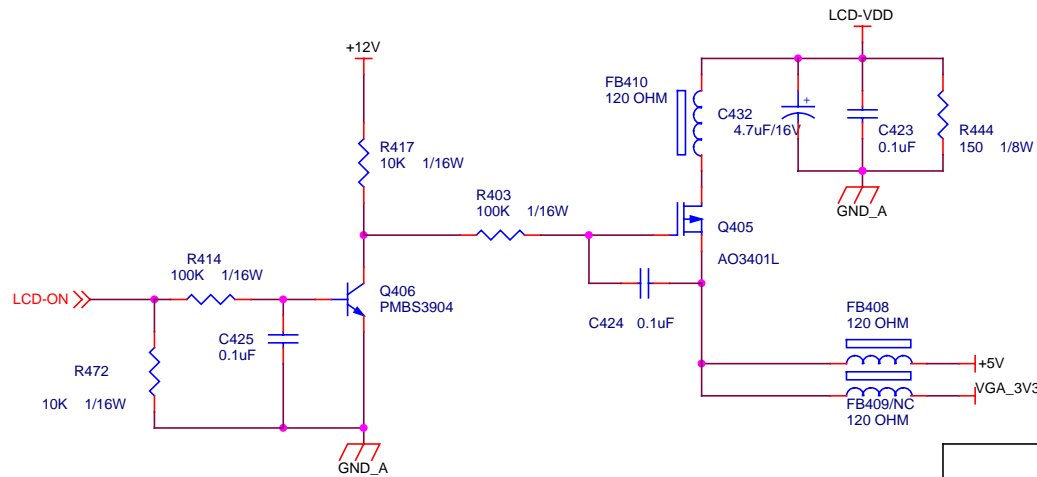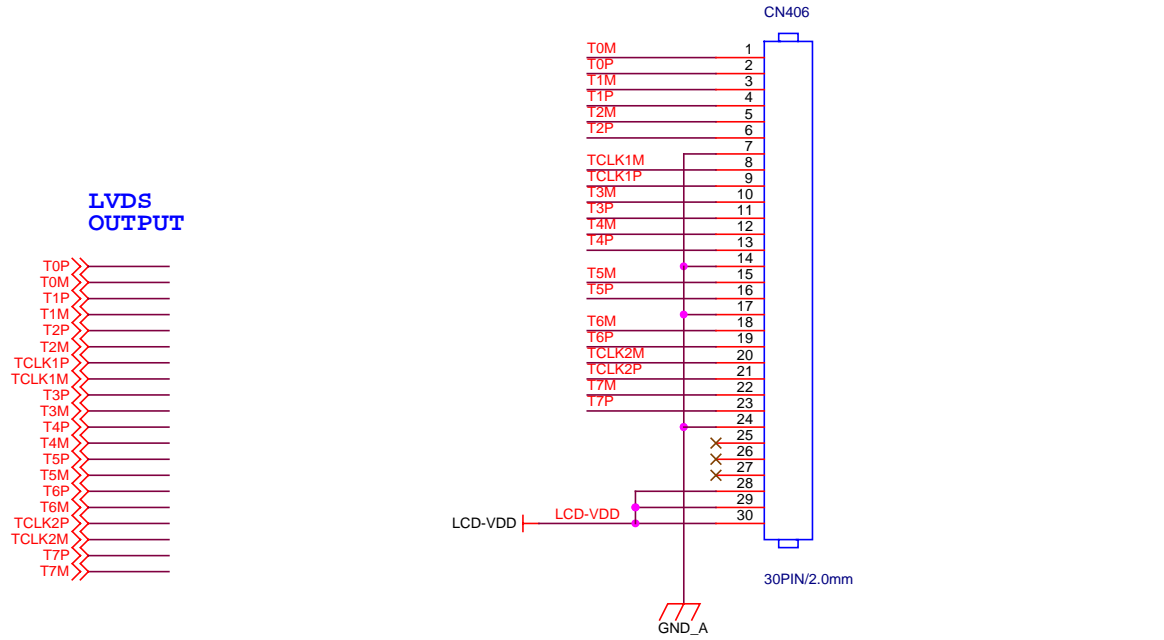


| | | |
|-------------------|----------------------------------|--------------|
| Title | | |
| 715G1712-1 | | |
| Size | Document Number | Rev |
| A4 | PHILIPS 170S-PANEL OUTPUT | B |
| Date: | Thursday, March 02, 2006 | Sheet 3 of 5 |

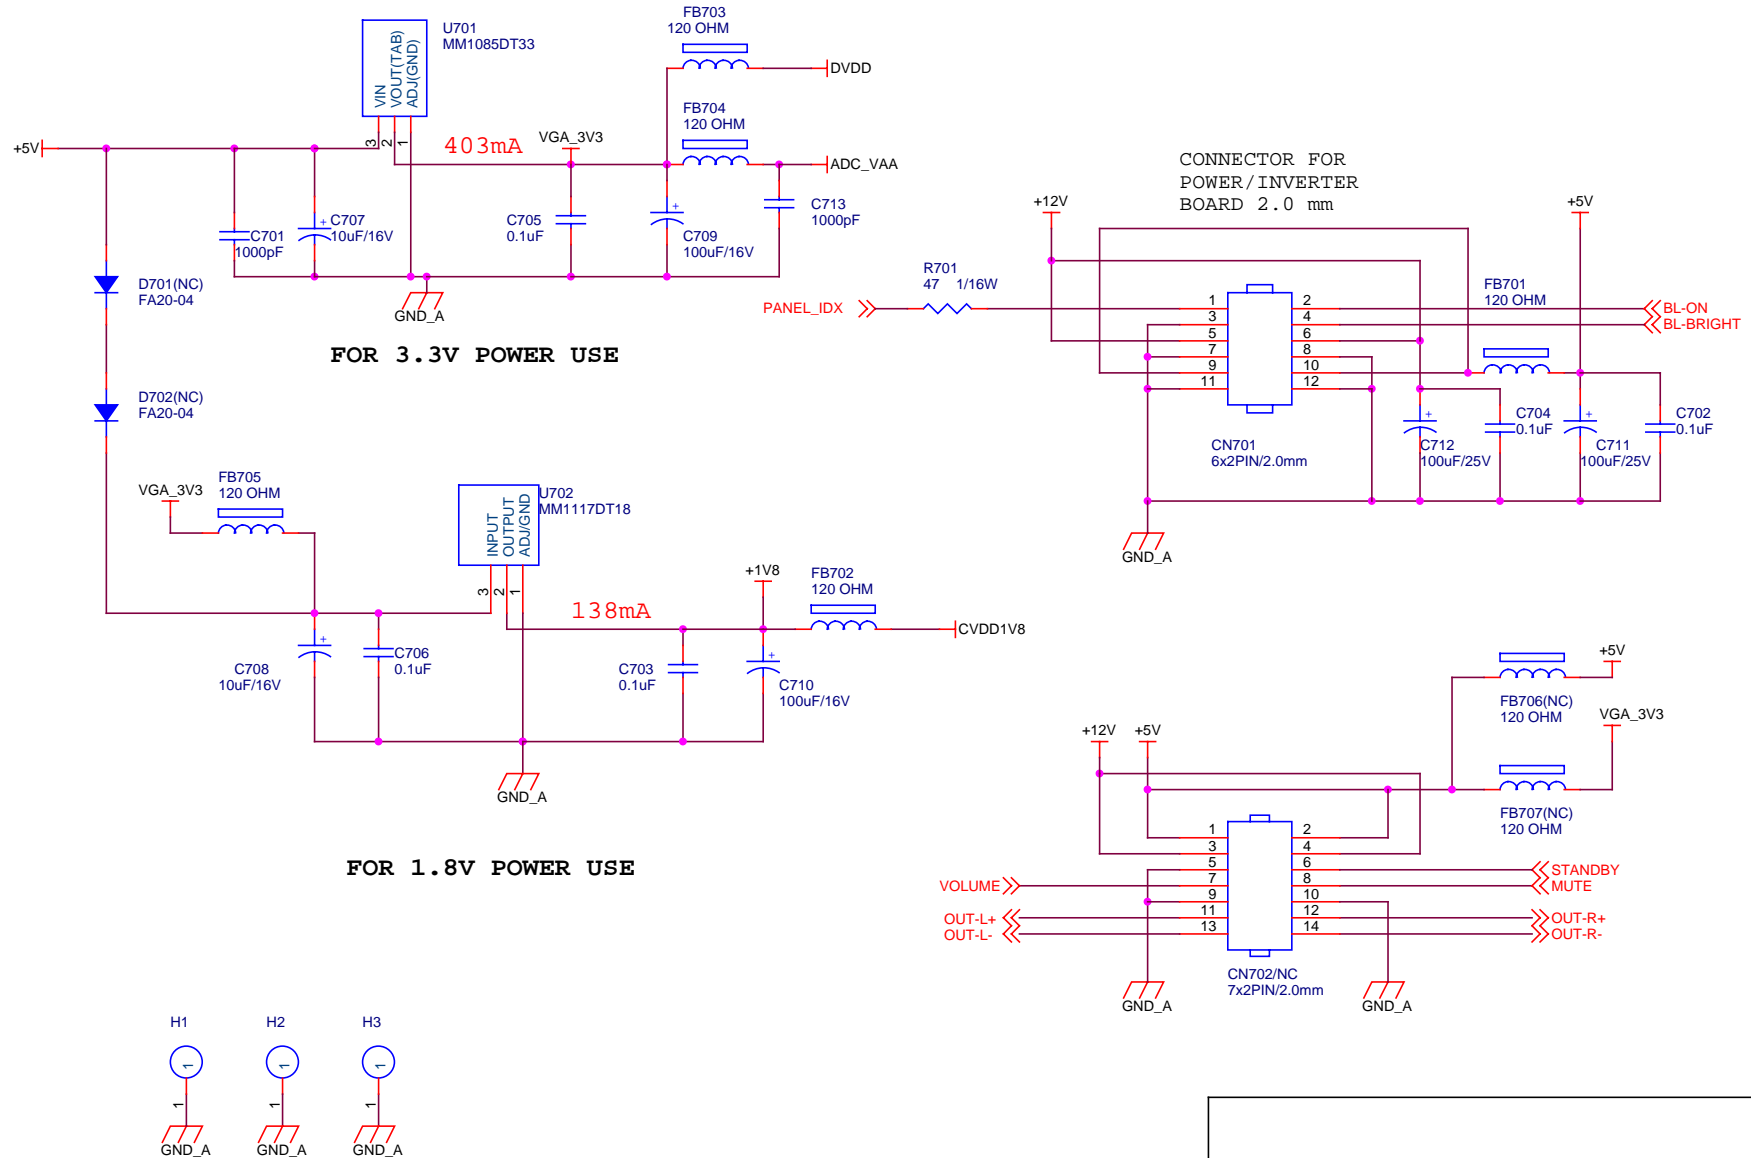


| | | |
|-------------------|----------------------------------|--------------|
| Title | | |
| 715G1712-1 | | |
| Size | Document Number | Rev |
| A4 | PHILIPS 170S-Scaler Power | B |
| Date: | Thursday, March 02, 2006 | Sheet 2 of 5 |

6.2 Power Board

PN : PWPC1742LGR1

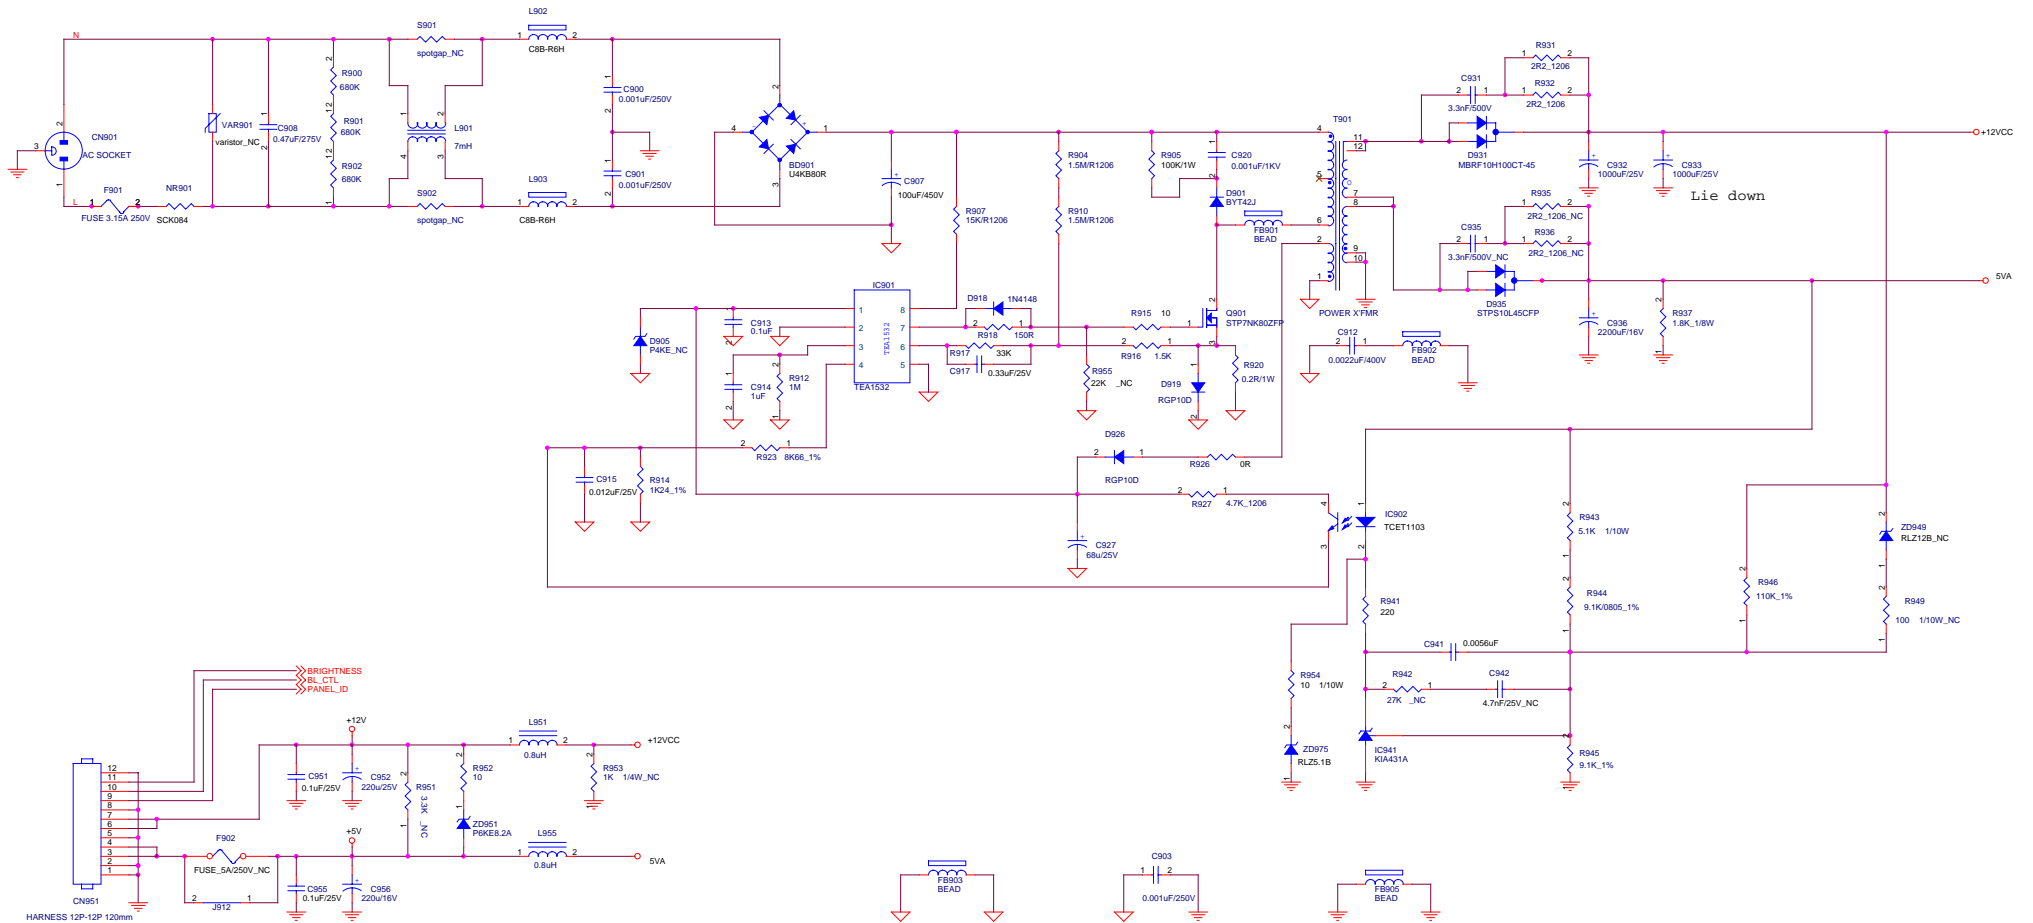



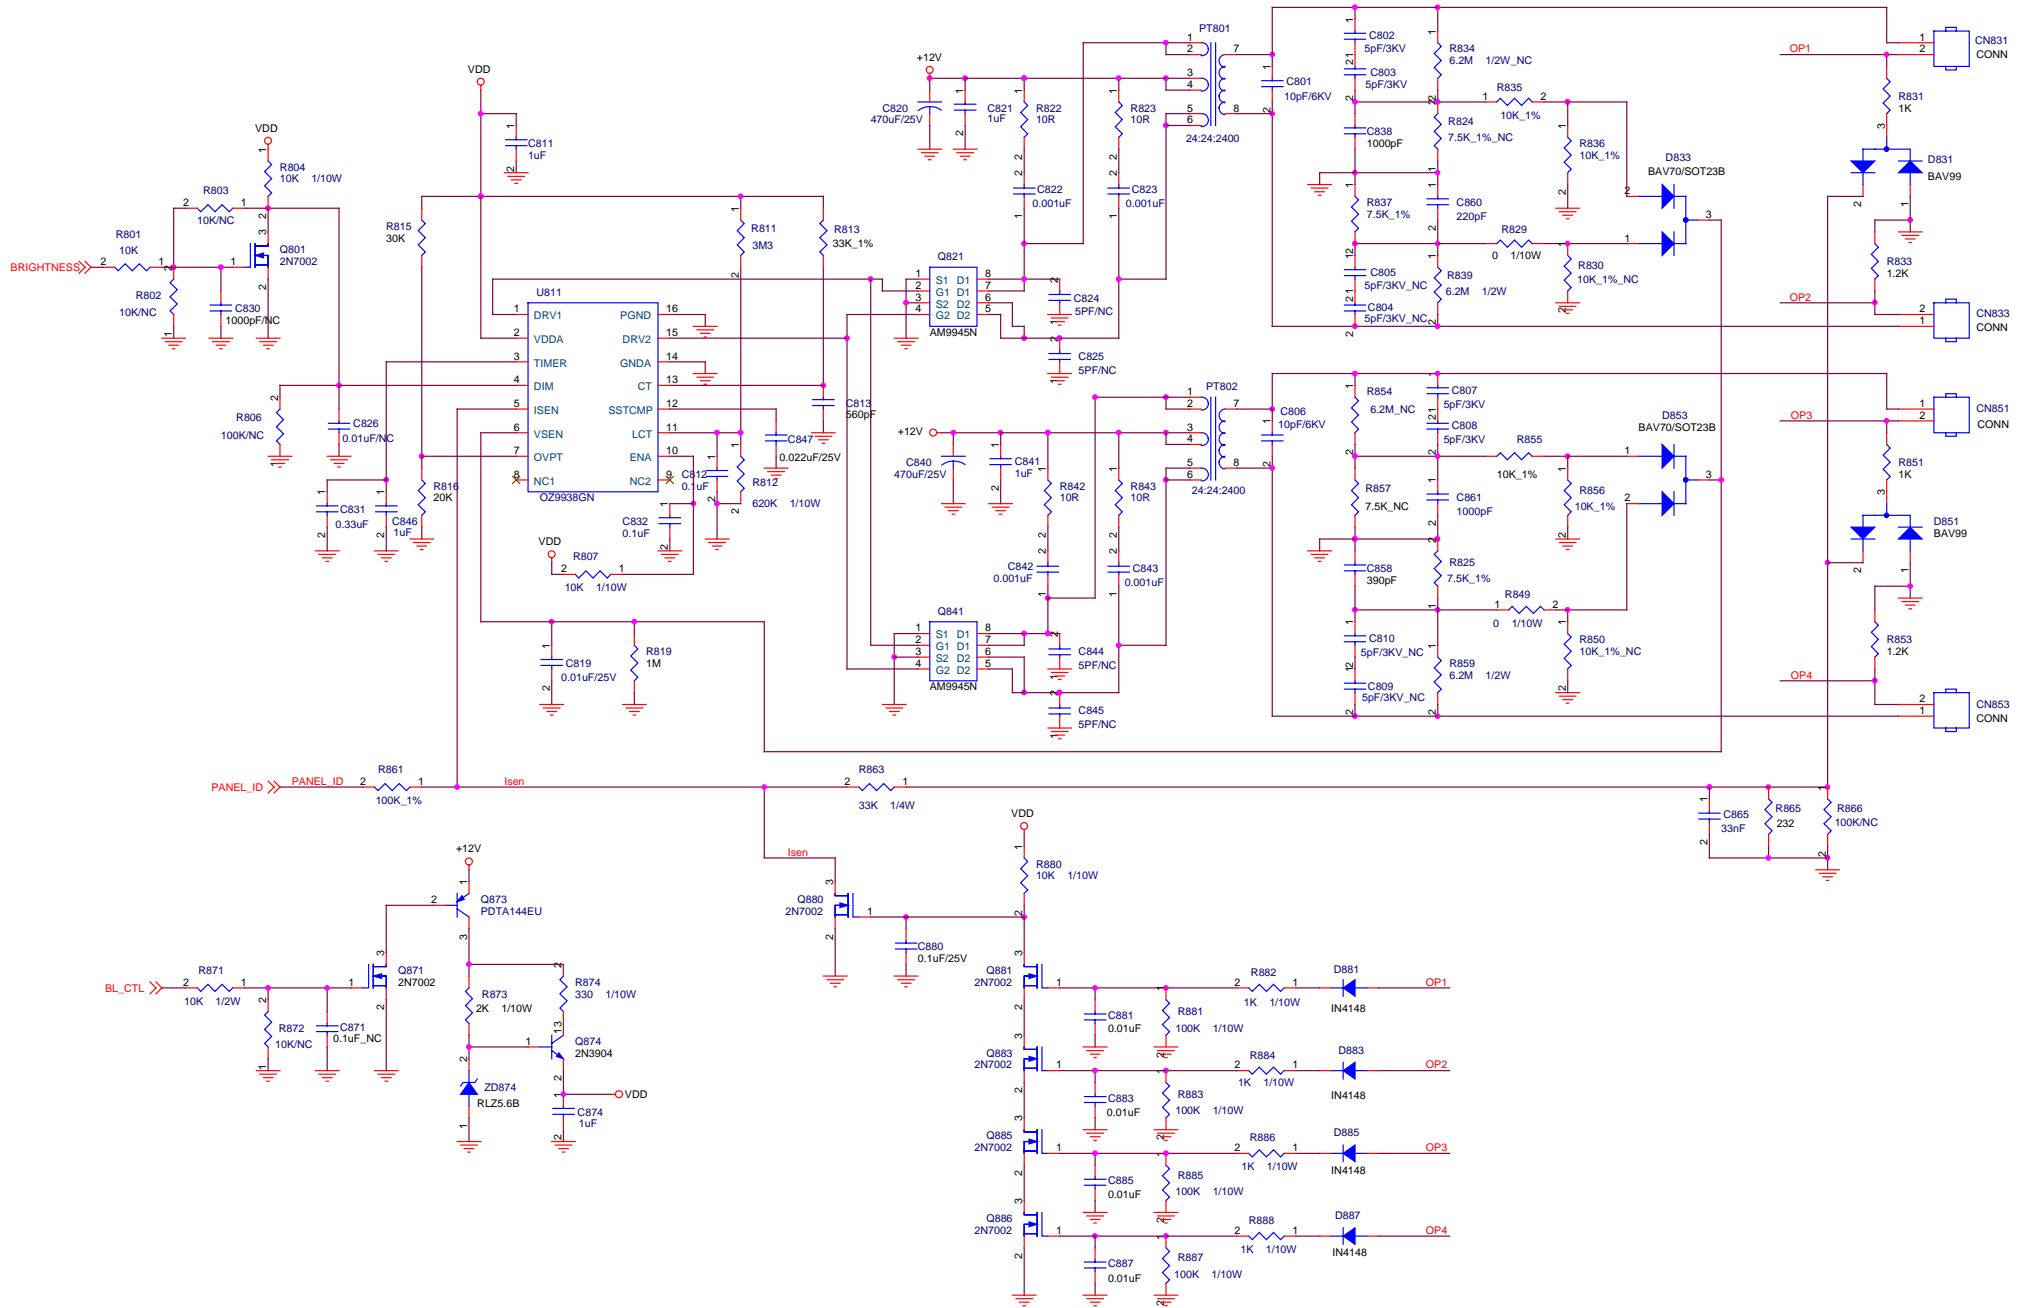


7. PCB Layout


7.1 Main Board


715G1712-1

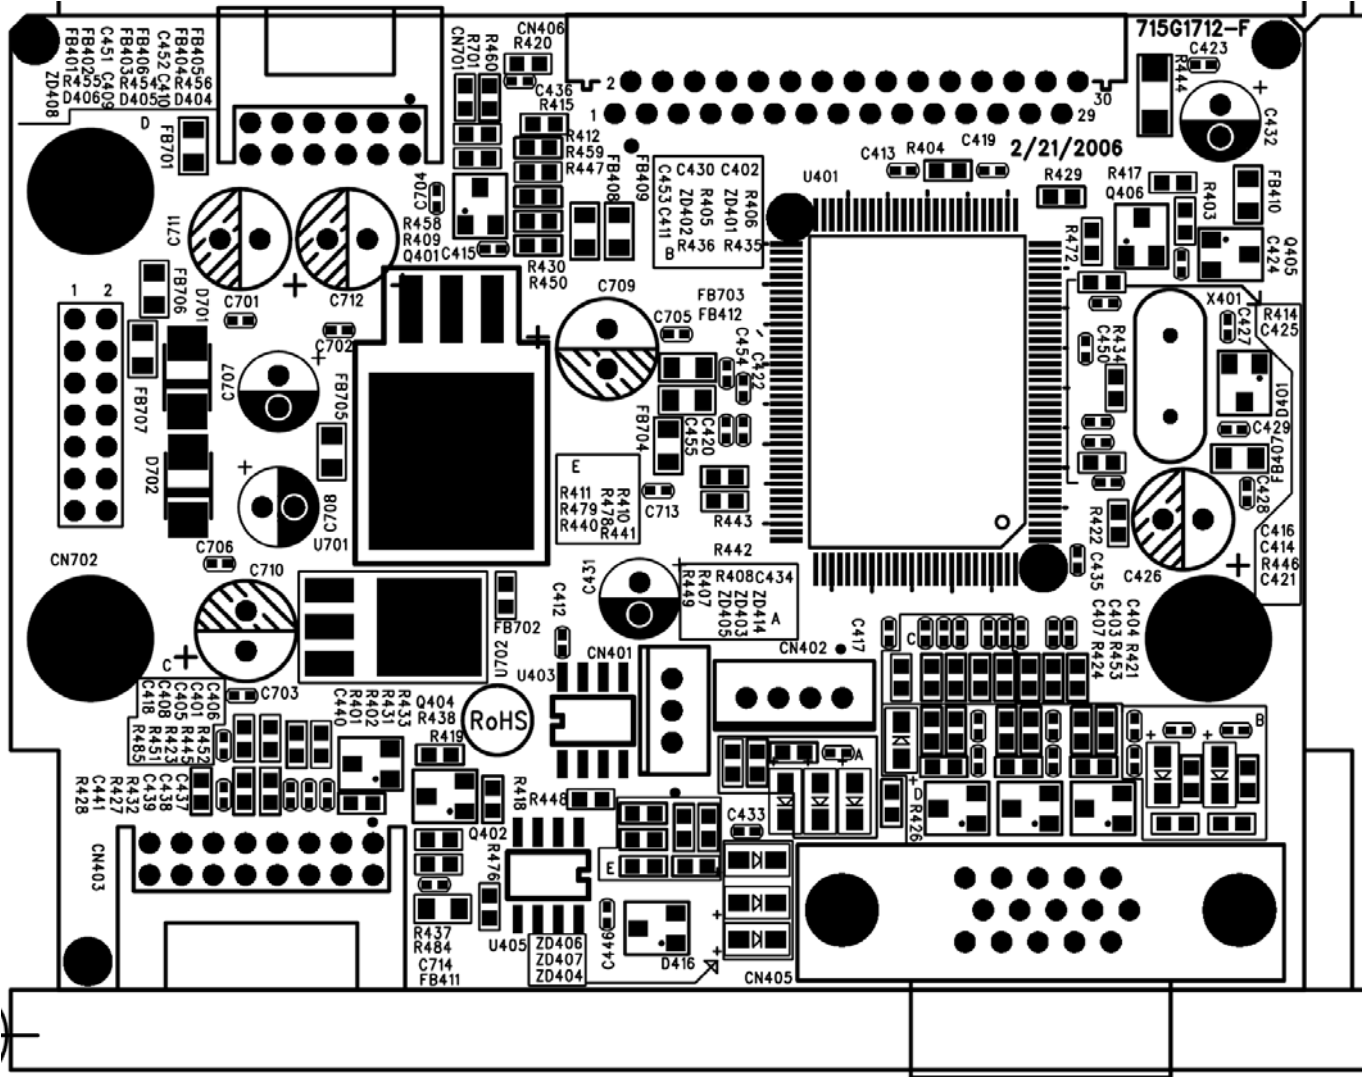


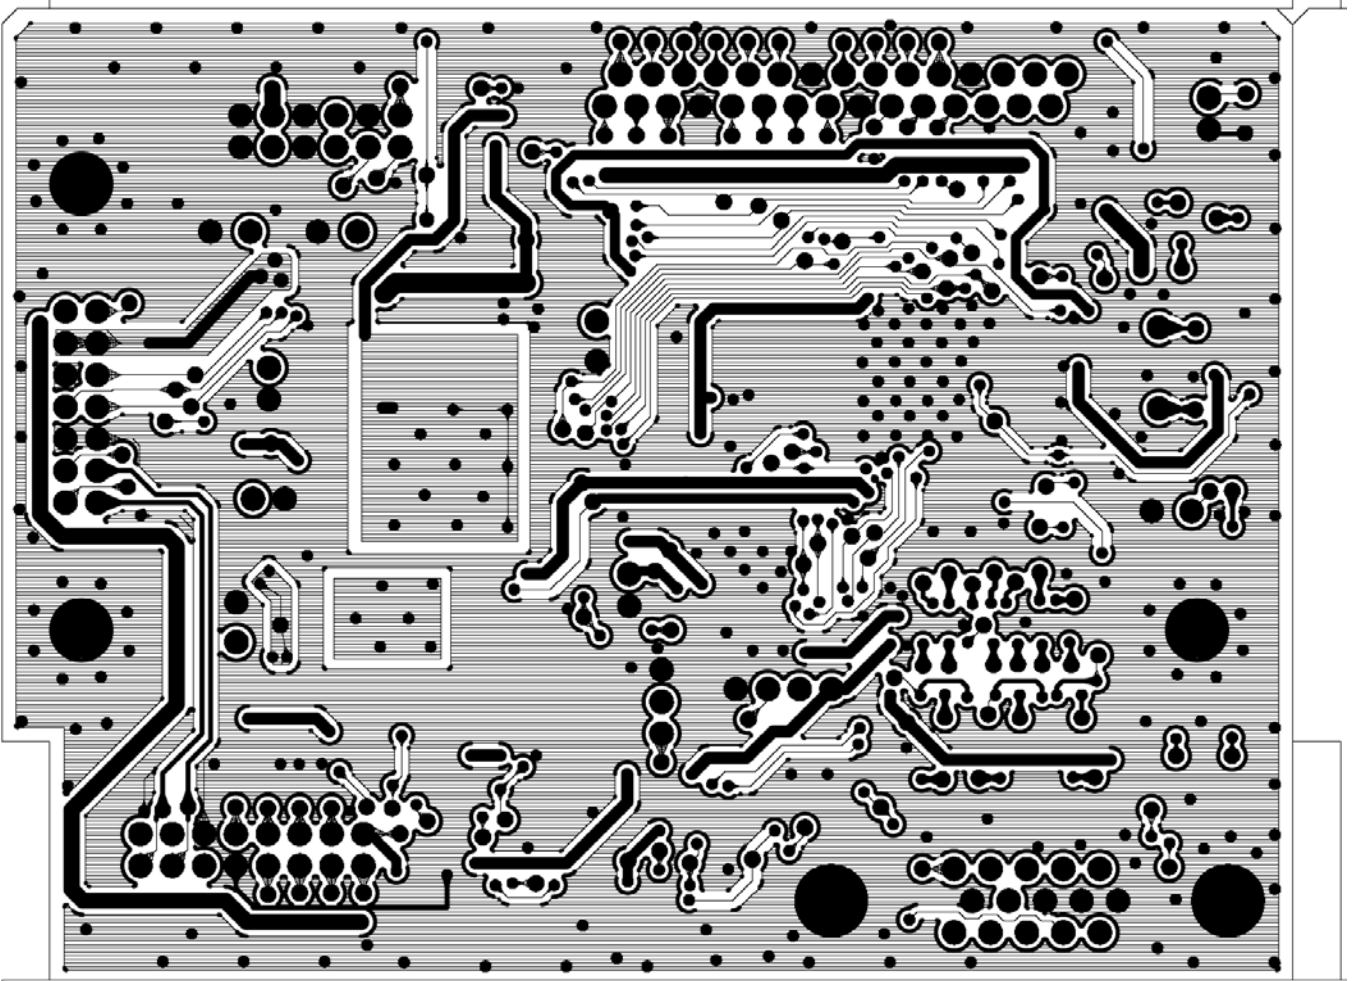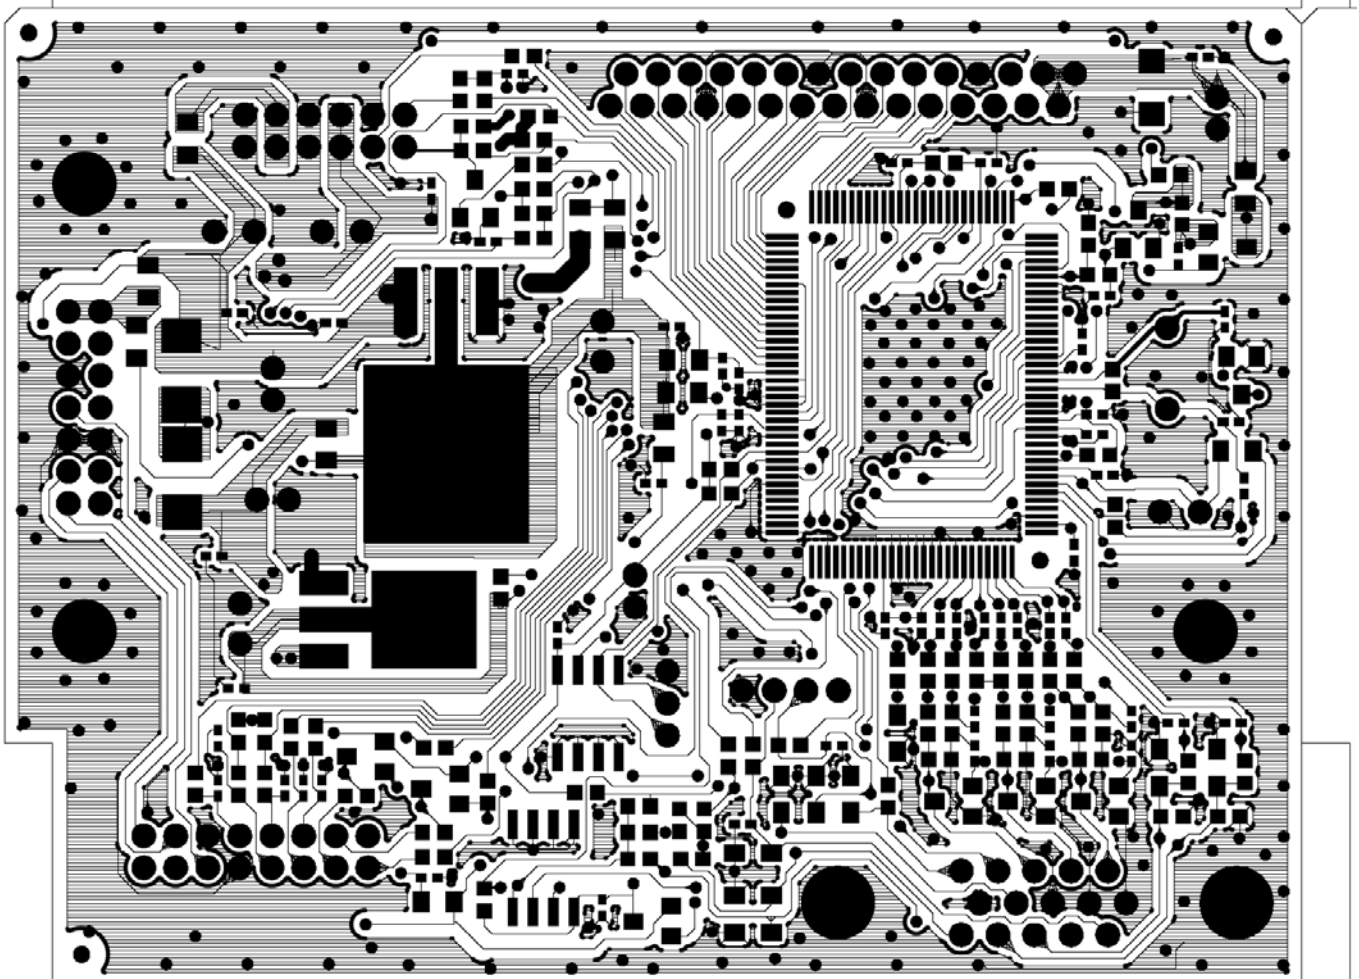


7.2 Power Board
715G1813-1

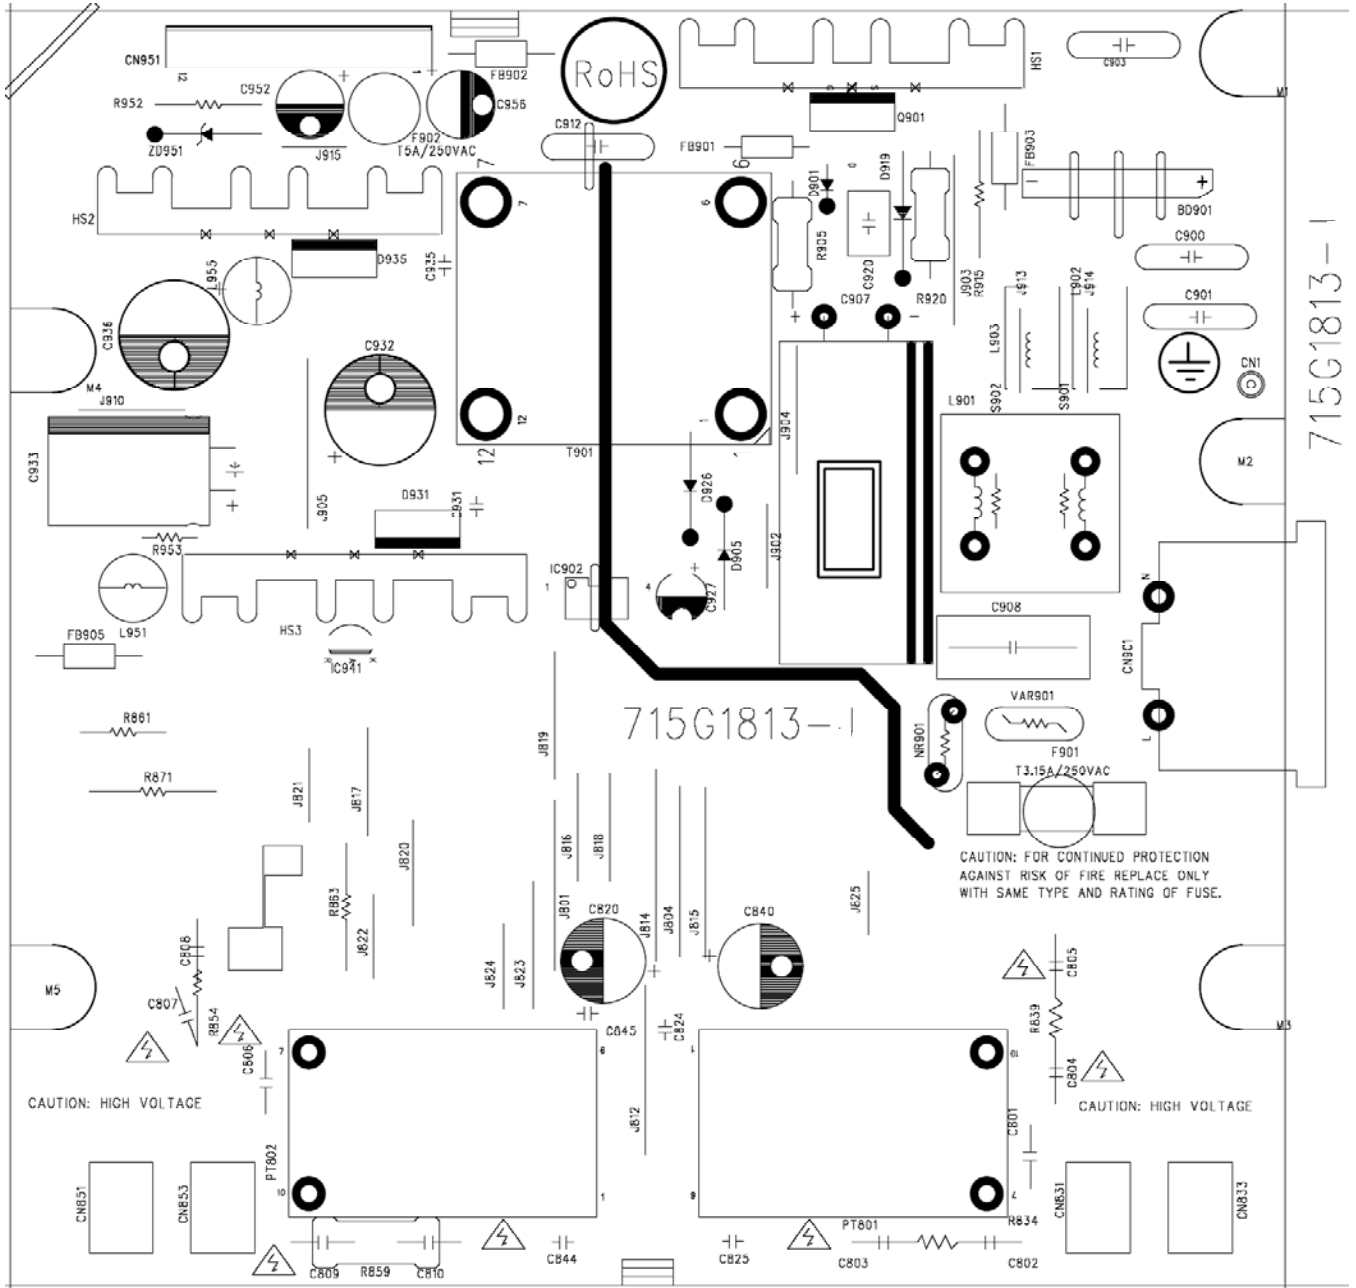

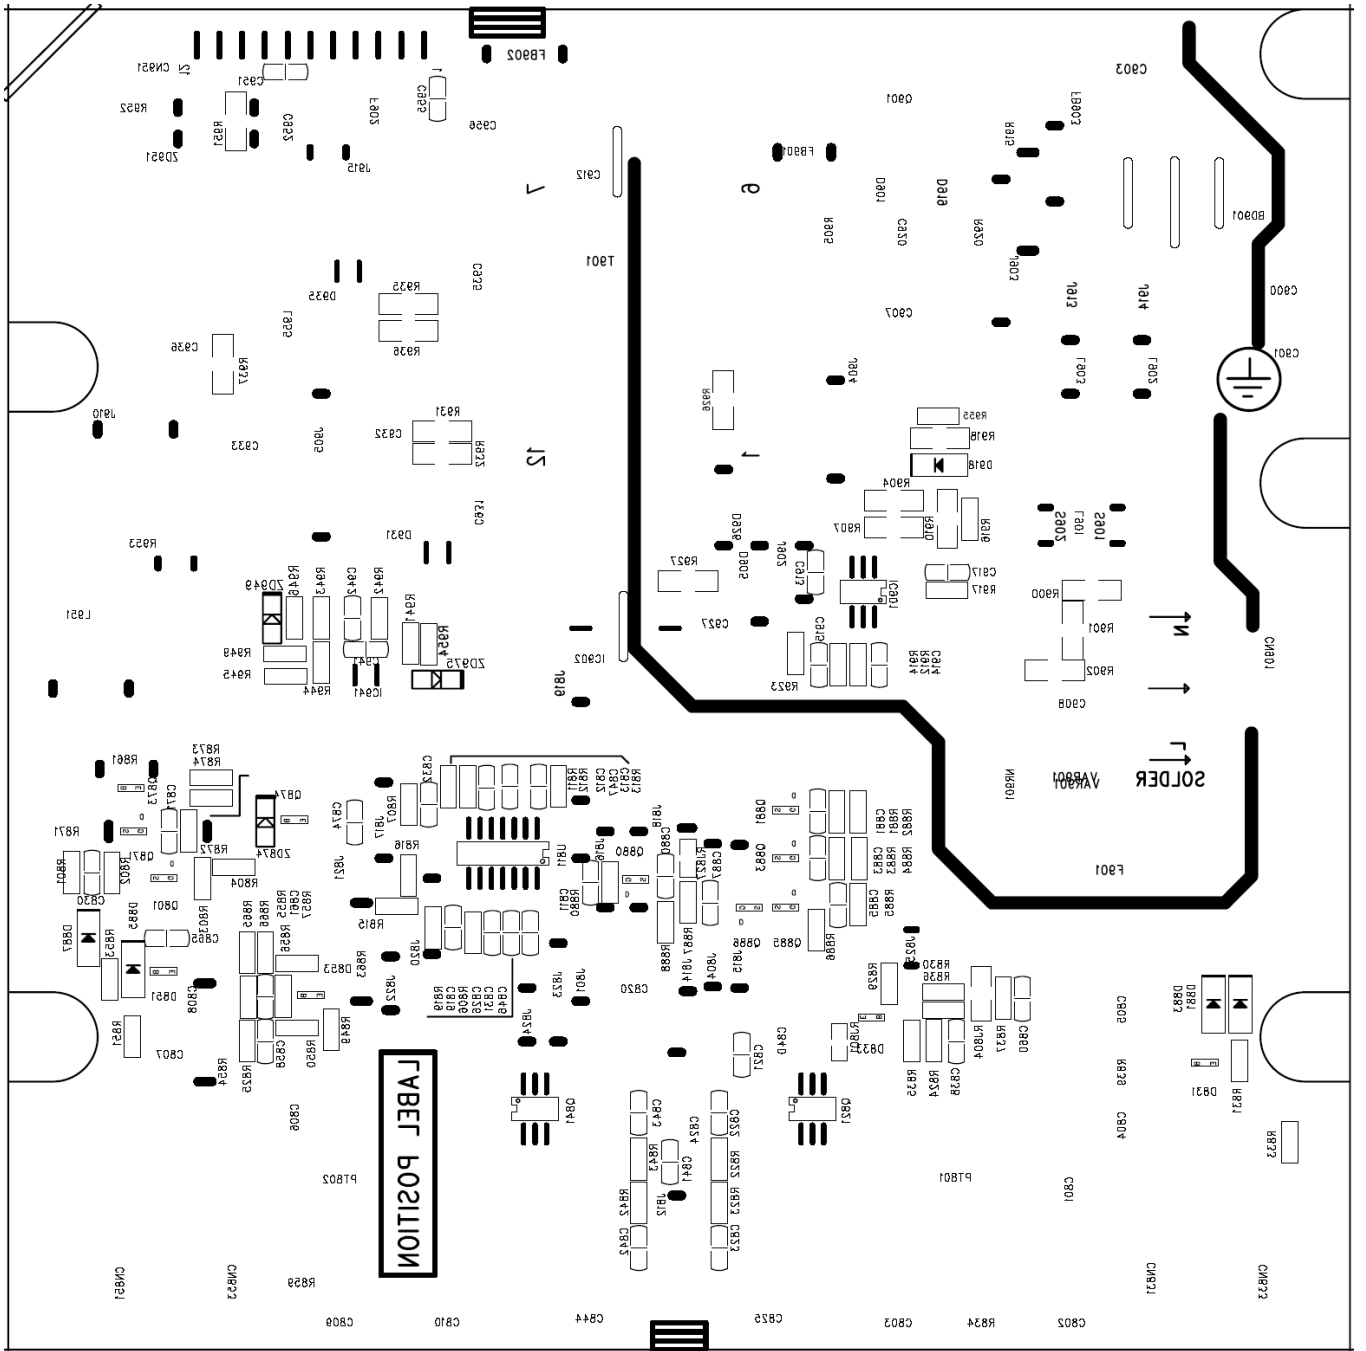


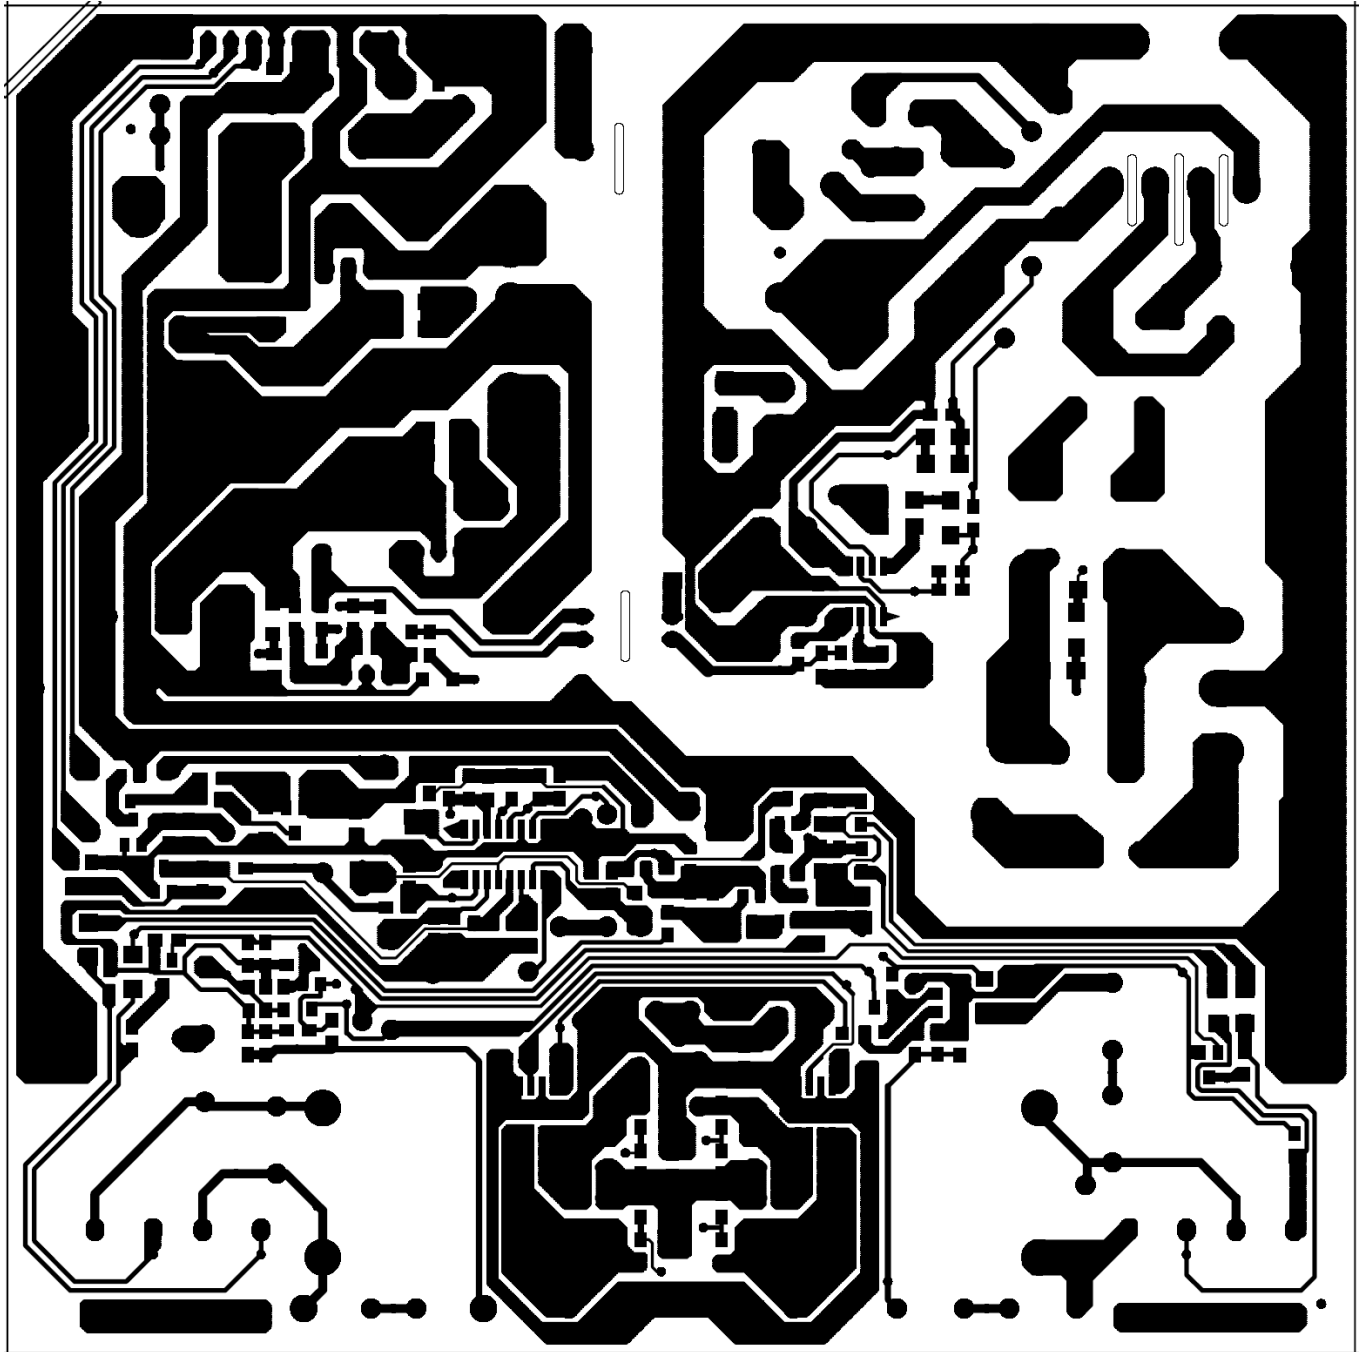

7.3 Key Board
715G1755-1



8. Wiring Diagram

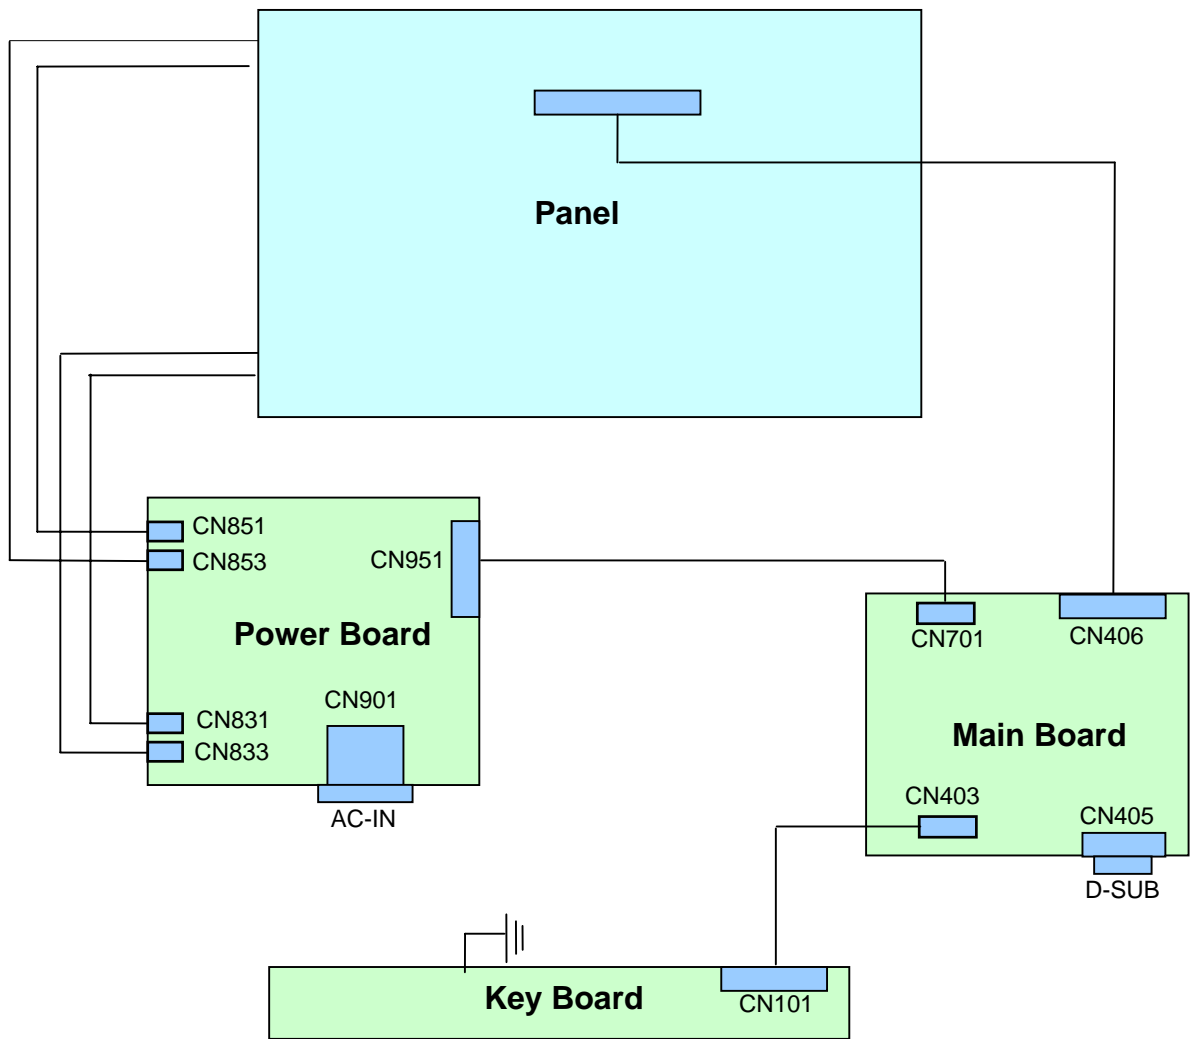

9. Mechanical Instructions

1. Back View as Fig.1



Fig.1

2. Remove base as Fig.2- Fig.3

- a. Remove 1 screw for hinge cover as Fig.2
- b. Remove 5 screws for base as Fig.3



Fig.2



Fig.3

3. Remove rear cover as Fig.4- Fig.6

- a. Remove 2 screws for back cover as Fig.4
- b. Using the "1" type screwdriver to open the 3 clicks on bottom side as Fig.5



Fig.4



Fig.5



Fig.6

4. Remove shield as Fig.7

Remove 6 screws as Fig.7

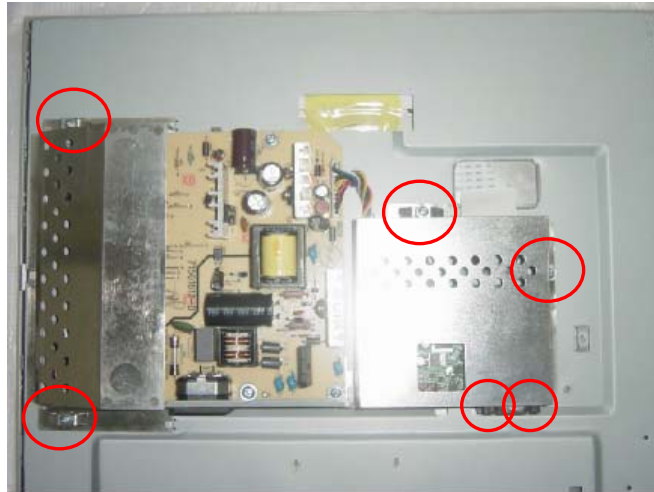


Fig.7

5. Remove main and Power board as Fig.8

Remove 13 screws for main and Power board as Fig.8

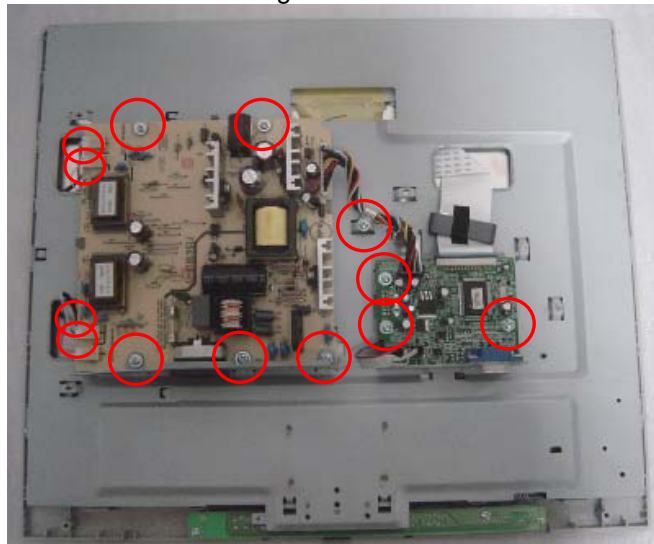


Fig.8

6. Remove the bezel as Fig.9- Fig.11

- a. Remove 2 screws at the right of bezel as Fig.9
- b. Remove 2 screws at the left of bezel as Fig.10
- c. Remove connect wire between main and key board as Fig.11

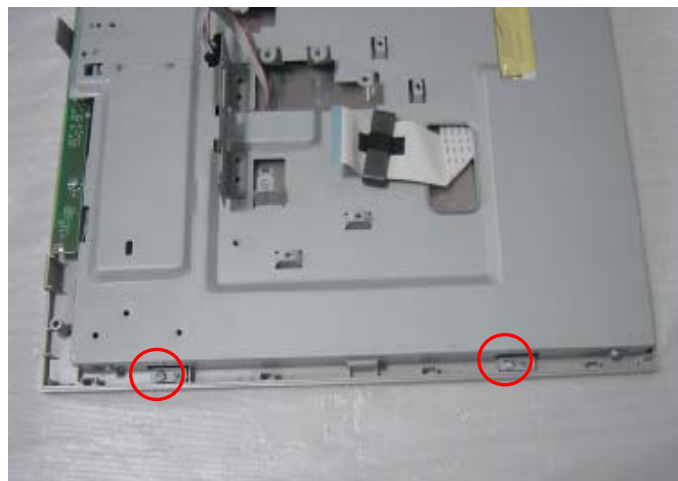


Fig.9

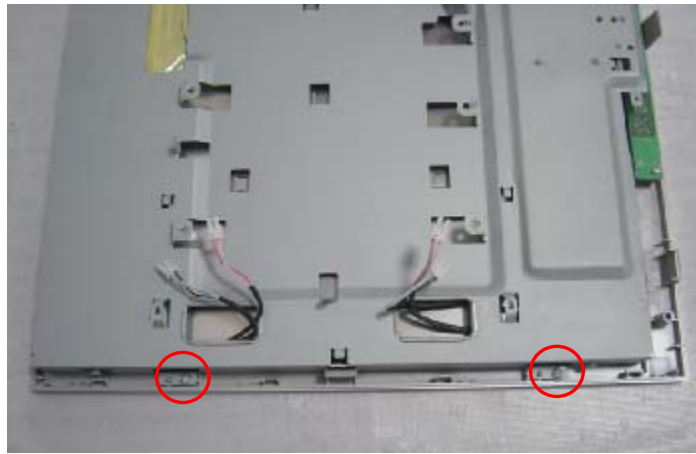


Fig.10



Fig.11

7. Remove the main frame as Fig.12- Fig.14

- a. Remove 2 screws at the right of main frame Fig.12
- b. Remove 2 screws at the left of main frame Fig.13



Fig.12




Fig.13





Fig.14

10. Trouble Shooting


This page deals with problems that can be corrected by a user. If the problem still persists after you have tried these solutions, contact Philips customer service representative.

| Common Problems | |
|--|--|
| Having this problem | Check these items |
| No Picture (Power LED not lit) | <ul style="list-style-type: none"> • Make sure the power cord is plugged into the power outlet and into the back of the monitor. • First, ensure that the power button on the front of the monitor is in the OFF position, then press it to the ON position. |
| No Picture (Power LED is amber or yellow) | <ul style="list-style-type: none"> • Make sure the computer is turned on. • Make sure the signal cable is properly connected to your computer. • Check to see if the monitor cable has bent pins. • The Energy Saving feature may be activated |
| Screen says  | <ul style="list-style-type: none"> • Make sure the monitor cable is properly connected to your computer. (Also refer to the Quick Set-Up Guide). • Check to see if the monitor cable has bent pins. • Make sure the computer is turned on. |
| AUTO button not working properly | <ul style="list-style-type: none"> • The Auto Function is designed for use on standard Macintosh or IBM-compatible PCs running Microsoft Windows. • It may not work properly if using nonstandard PC or video card. |
| Imaging Problems | |
| Display position is incorrect | <ul style="list-style-type: none"> • Press the Auto button. • Adjust the image position using the Phase/Clock of More Settings in OSD Main Controls. |
| Image vibrates on the screen | <ul style="list-style-type: none"> • Check that the signal cable is properly connected to the graphics board or PC. |


| | |
|---|---|
| <p>Vertical flicker appears</p>  | <ul style="list-style-type: none"> • Press the Auto button. • Eliminate the vertical bars using the Phase/Clock of More Settings in OSD Main Controls. |
| <p>Horizontal flicker appears</p>  | <ul style="list-style-type: none"> • Press the Auto button. • Eliminate the vertical bars using the Phase/Clock of More Settings in OSD Main Controls. |
| <p>The screen is too bright or too dark</p> | <ul style="list-style-type: none"> • Adjust the contrast and brightness on On-Screen Display. (The backlight of the LCD monitor has a fixed life span. When the screen becomes dark or begins to flicker, please contact your sales representative). |
| <p>An after-image appears</p> | <ul style="list-style-type: none"> • If an image remains on the screen for an extended period of time, it may be imprinted in the screen and leave an after-image. This usually disappears after a few hours |
| <p>An after-image remains after the power has been turned off.</p> | <ul style="list-style-type: none"> • This is characteristic of liquid crystal and is not caused by a malfunction or deterioration of the liquid crystal. The after-image will disappear after a period of time. |
| <p>Green, red, blue, dark, and white dots remains</p> | <ul style="list-style-type: none"> • The remaining dots are normal characteristic of the liquid crystal used in today's technology. |

11. Repair Flow Chart


(1). No Power

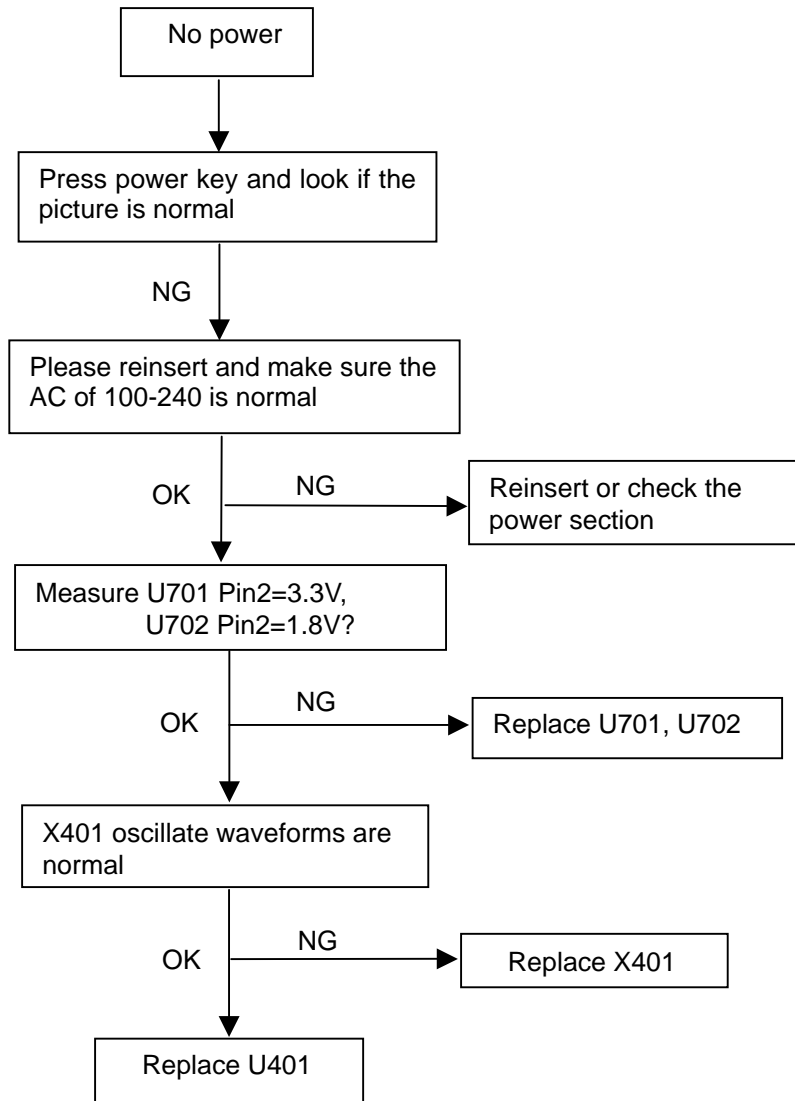


(2). No Picture

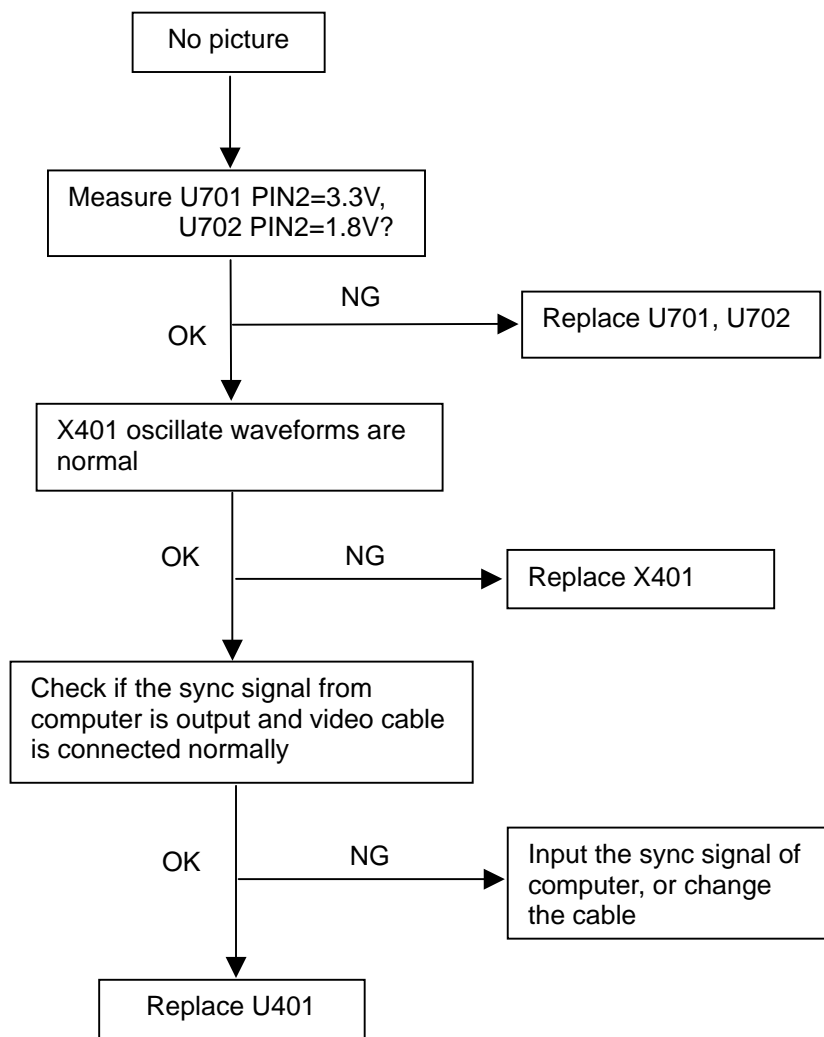

(3). White screen

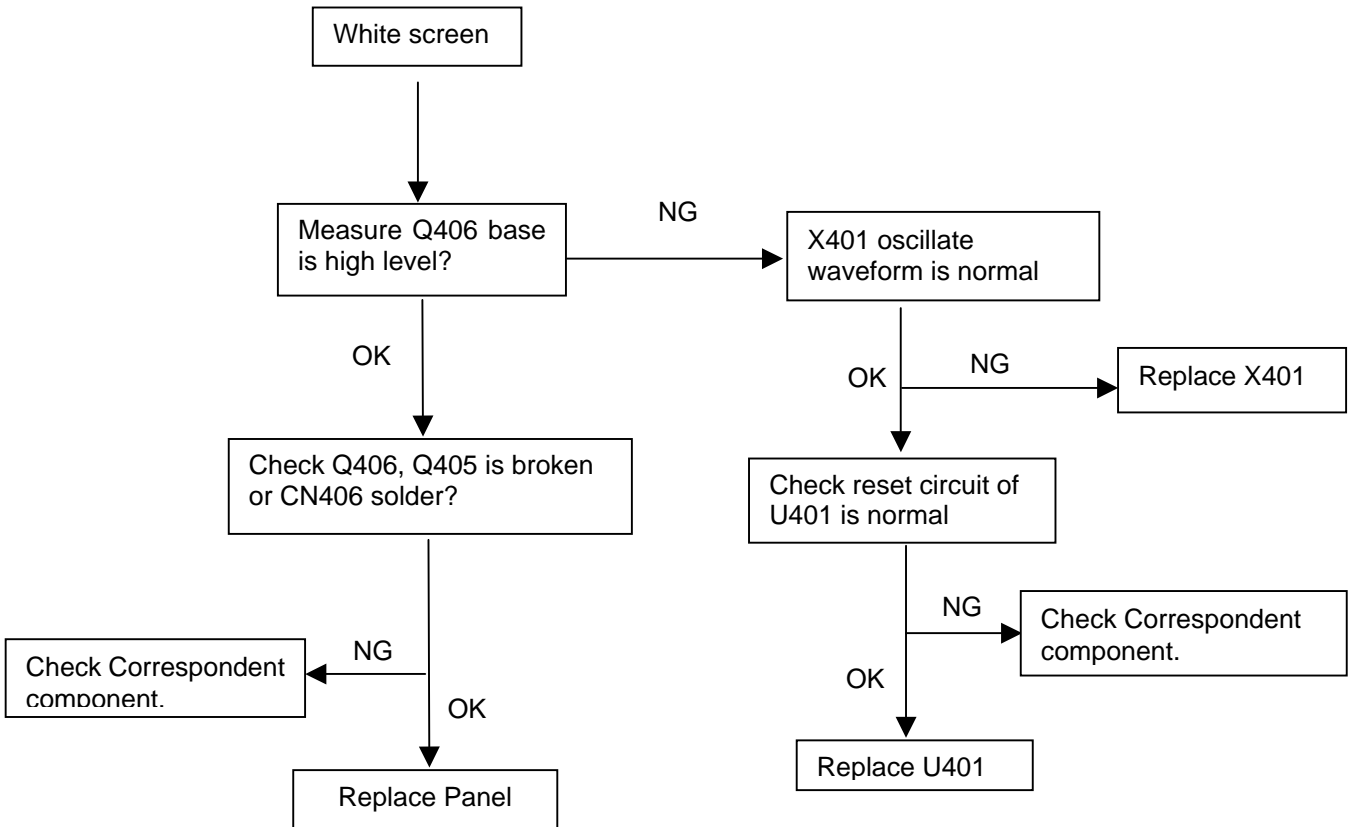


(4). Keypad Board

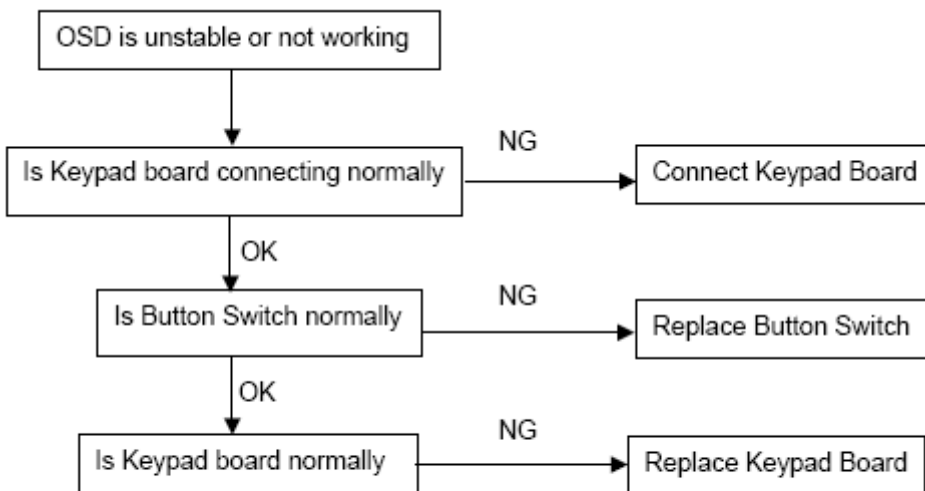


Power/Inverter Board

No power

Adapter Board

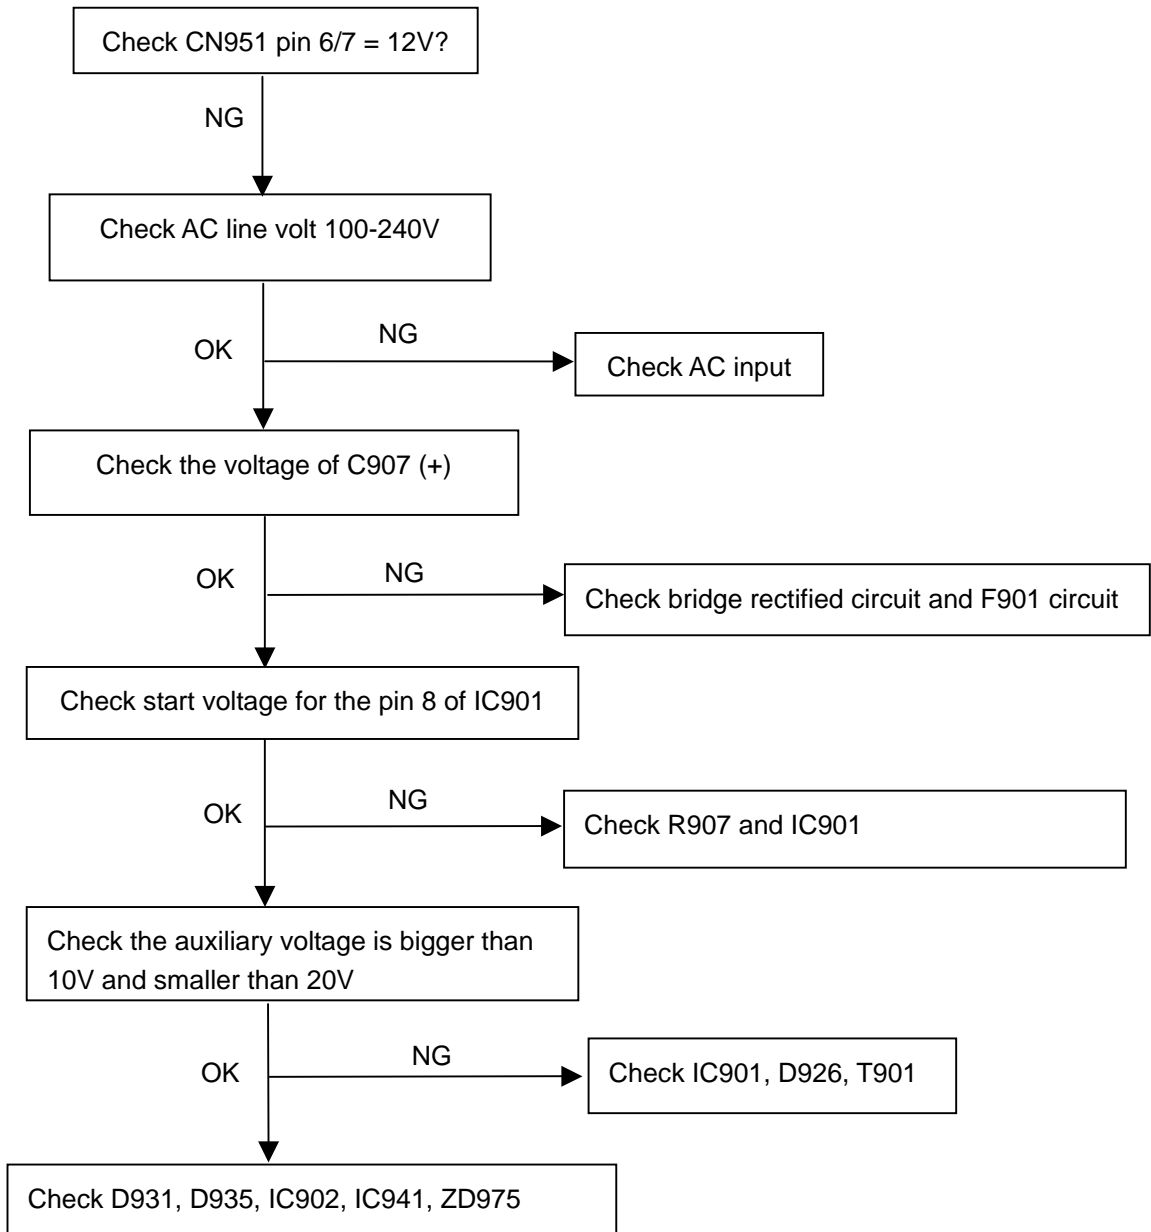

Inverter board
No power

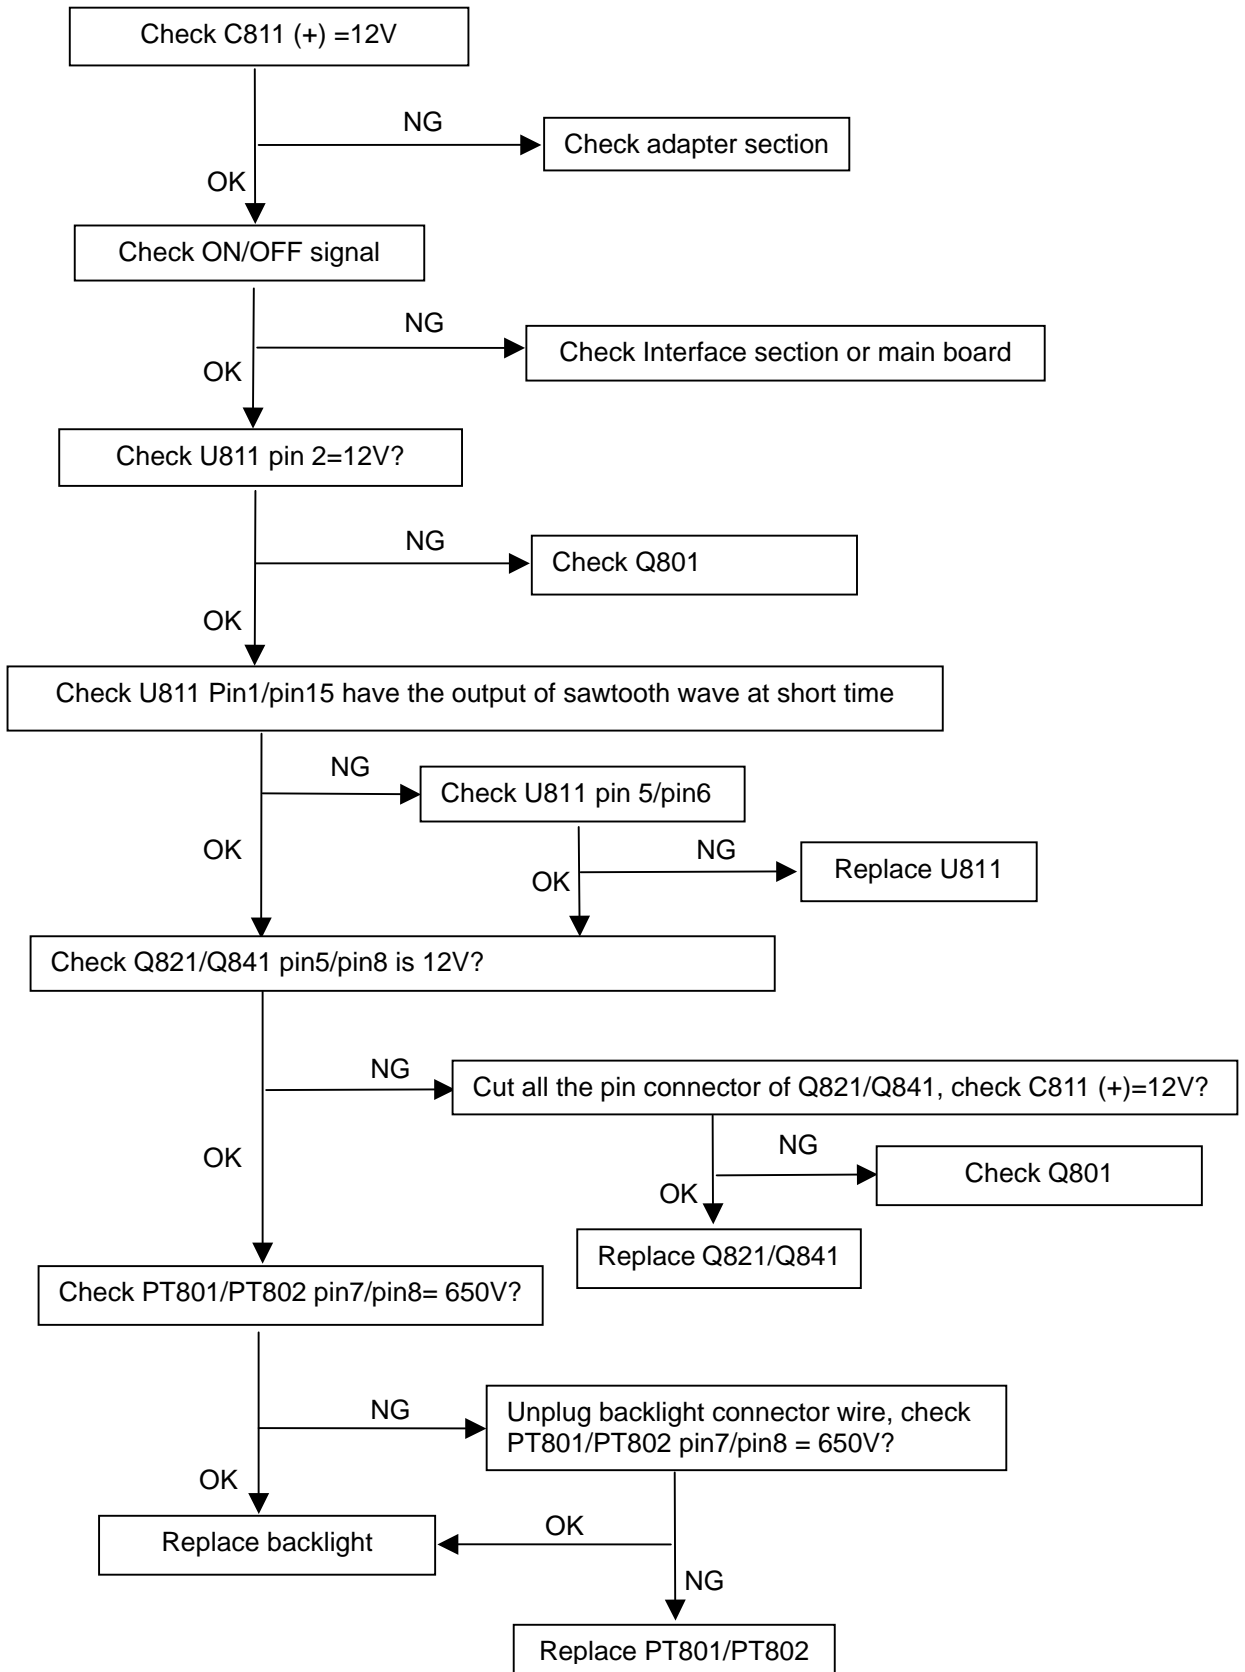


12. ISP Instruction

Configurations and Procedure

- 1). “Easywriter” The software is provider by Novatek to upgrade the firmware of CPU.
- 2). It is a windows-based program, which cannot be run in MS-DOS.


System and equipment requirements


- 1). An i486 (or above) personal computer or compatible.
- 2). Microsoft operation system Windows 95/98/2000/XP.
- 3). ISP Software “Easywriter” and “*****.hex”


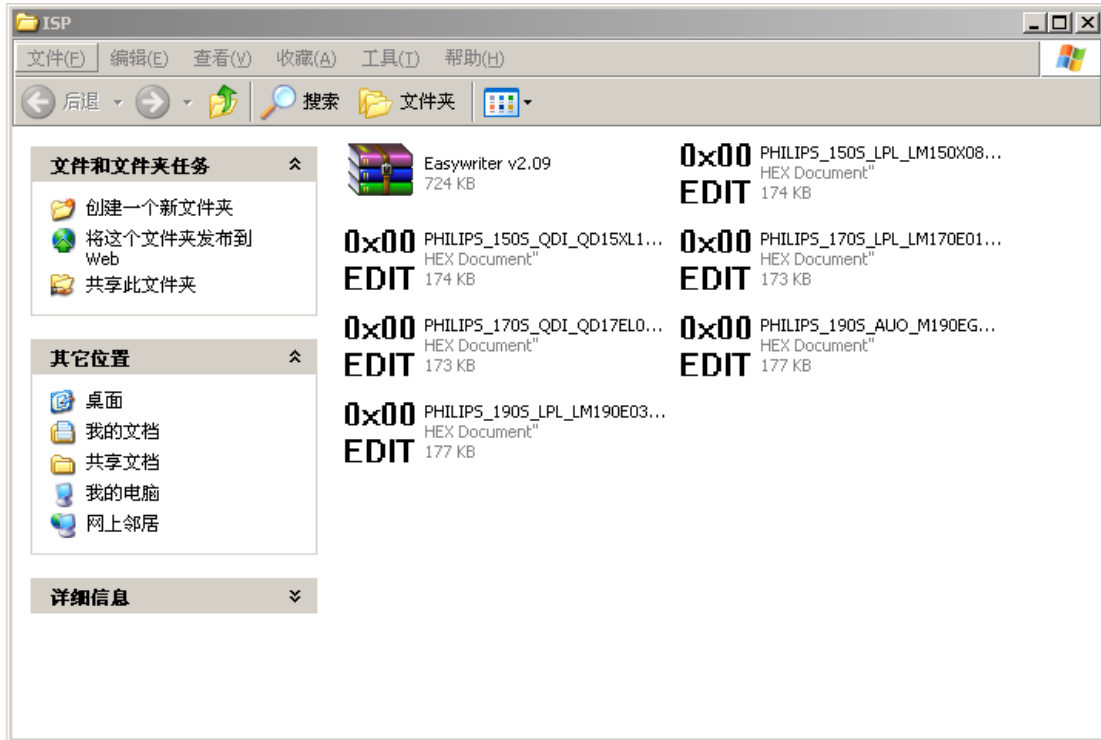




(1). Install the program software

- a. First decompressing files  EasyWriterV2.09.rar
WinRAR 档案文件
618 KB, as follow:

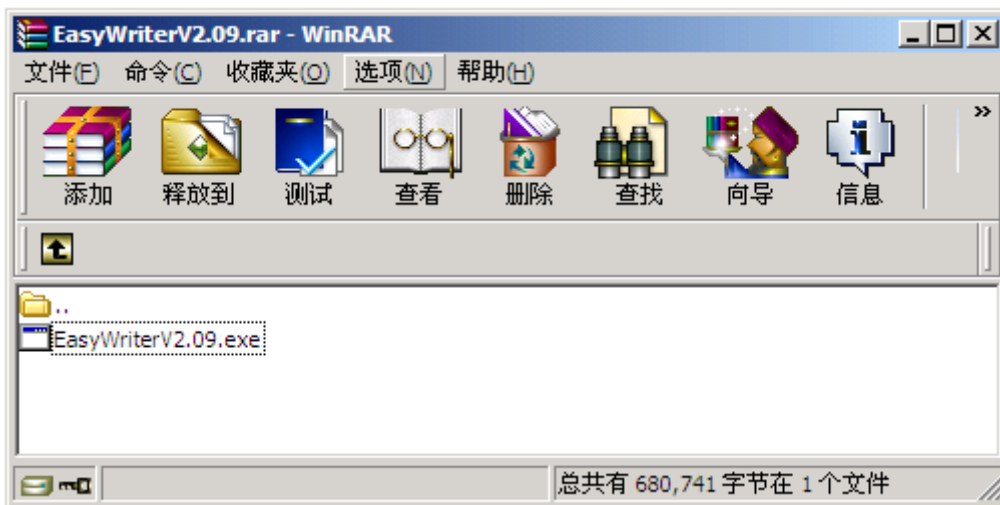


- b. Double – click , start to install as follows:

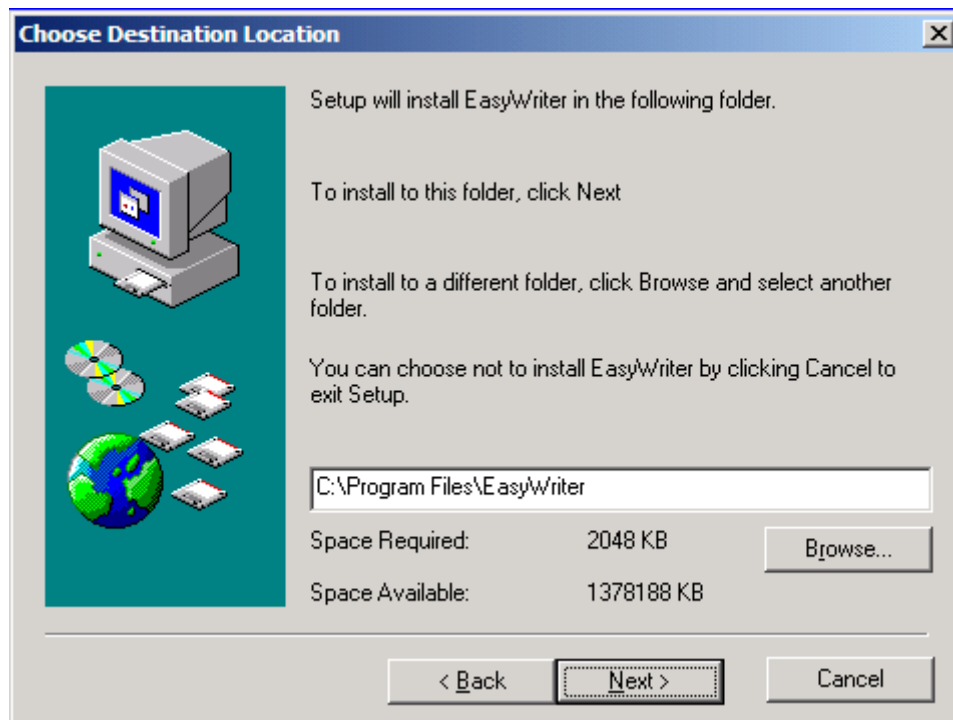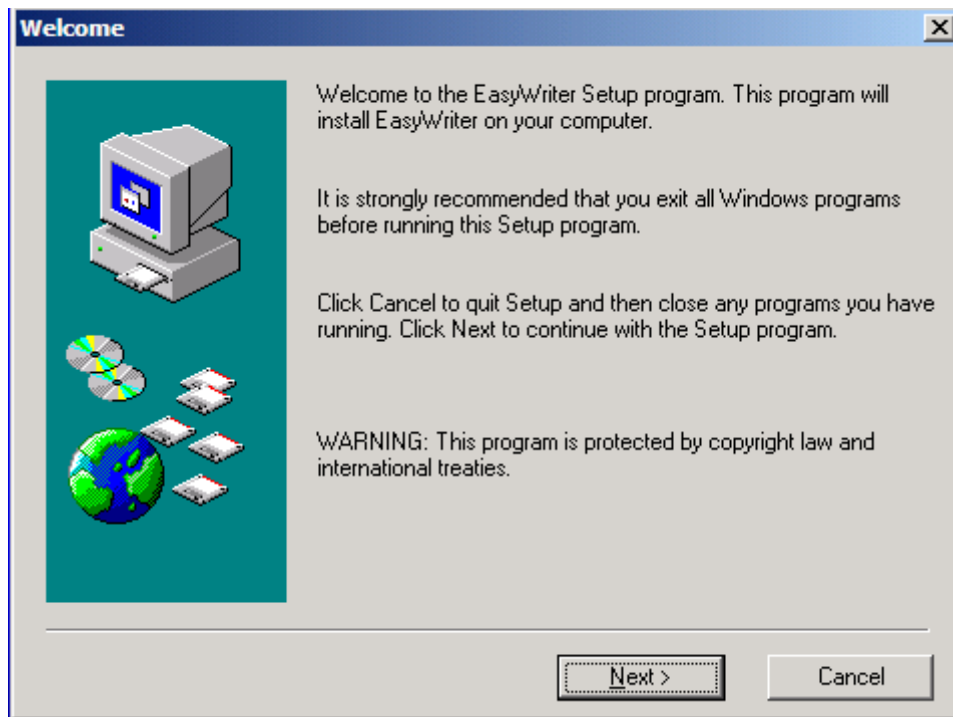

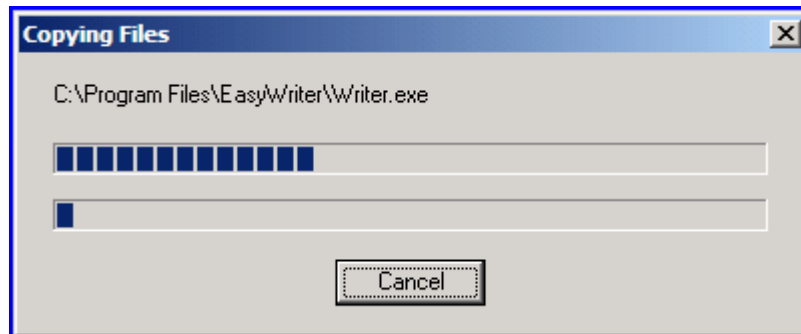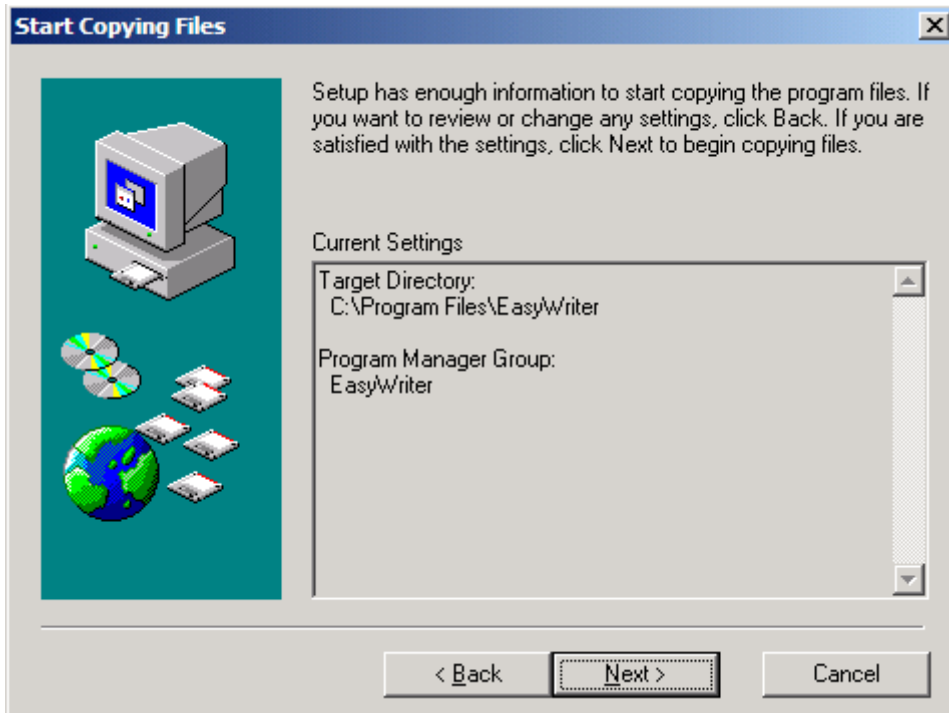
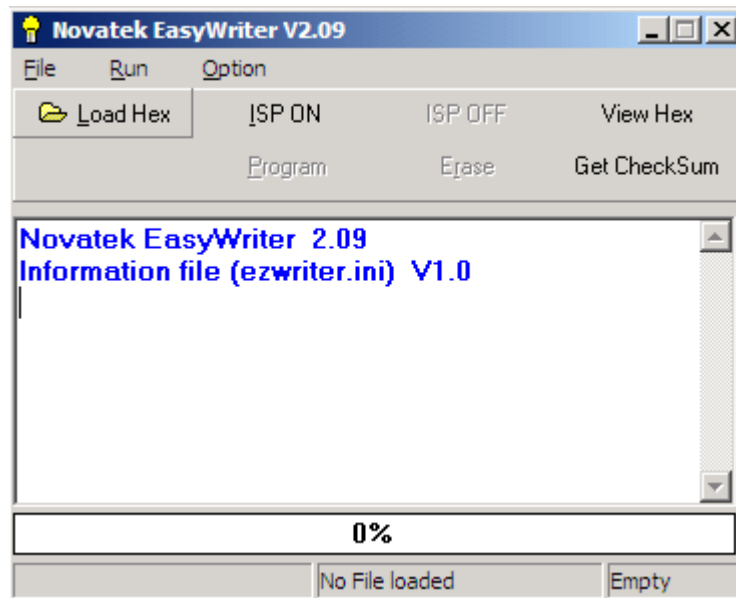



c. There will be a shortcut key  appears on the desktop.


(2). Connect the ISP board as follow:

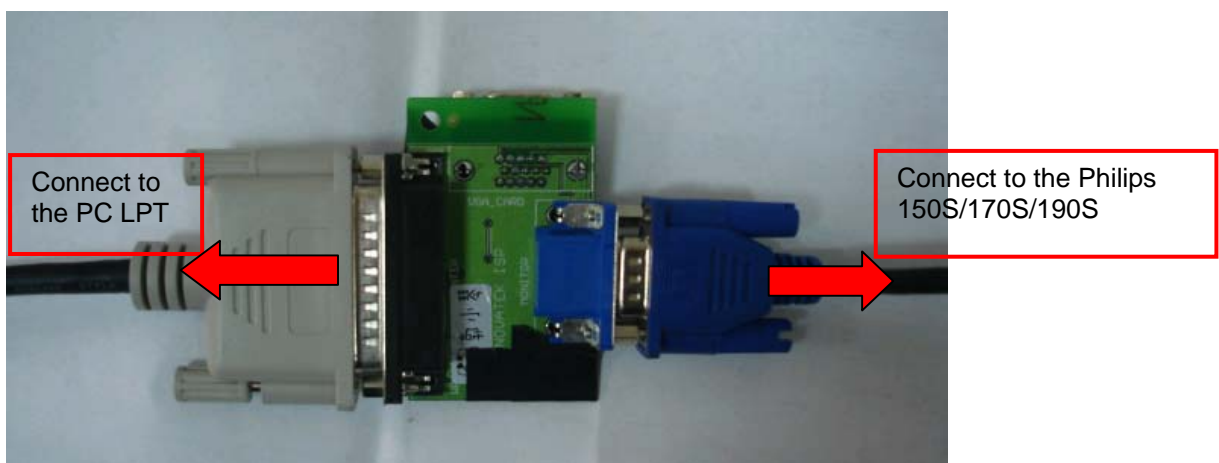

a. Double-click , running the program as follows:





b. Click  Load Hex icon, search the program" PHILIPS_170S_QDI_QD17EL0711_AP_036.HEX", and click **open**:

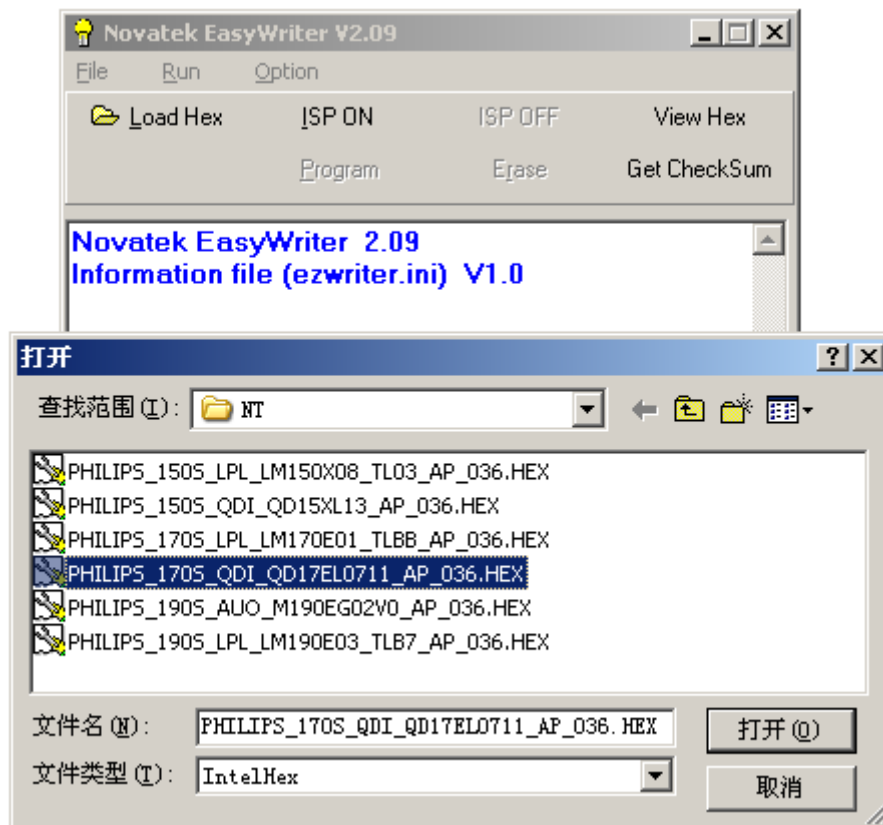


Note: If it is 170s model, you can select the  PHILIPS_170S_QDI_QD17EL0711_AP_036.HEX (for QDI panel) or  PHILIPS_170S_LPL_LM170E01_TLBB_AP_036.HEX (for LPL panel)


c. After click "OPEN", there would be a dialog box, select 3. NT68F633 (64K).

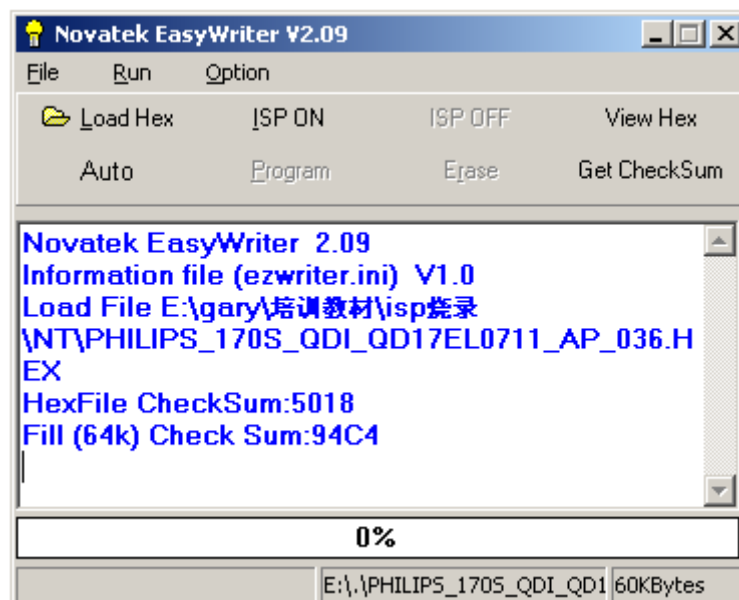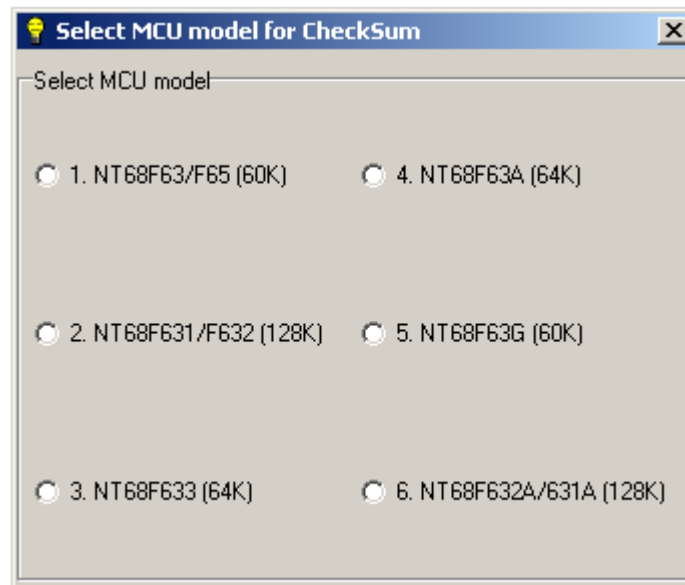

d. Click **Auto** icon, the writer is in processing...

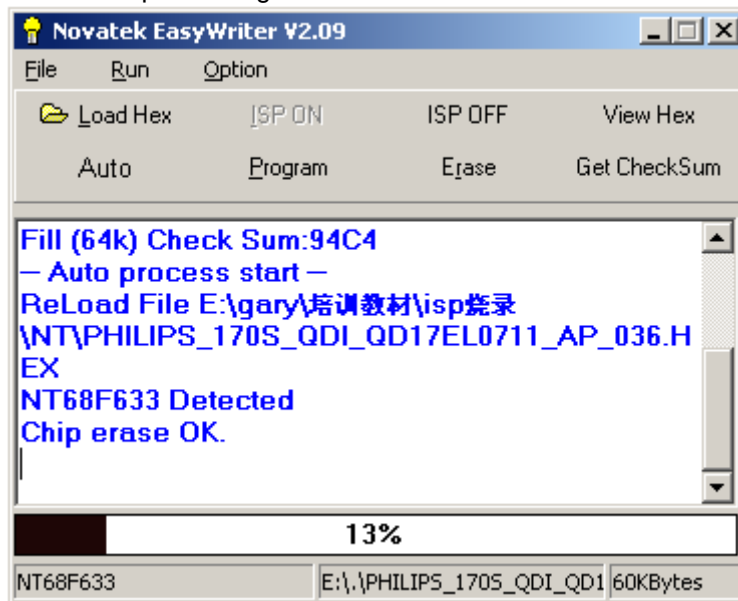

e. Until appears the follow Fig, writer completed.

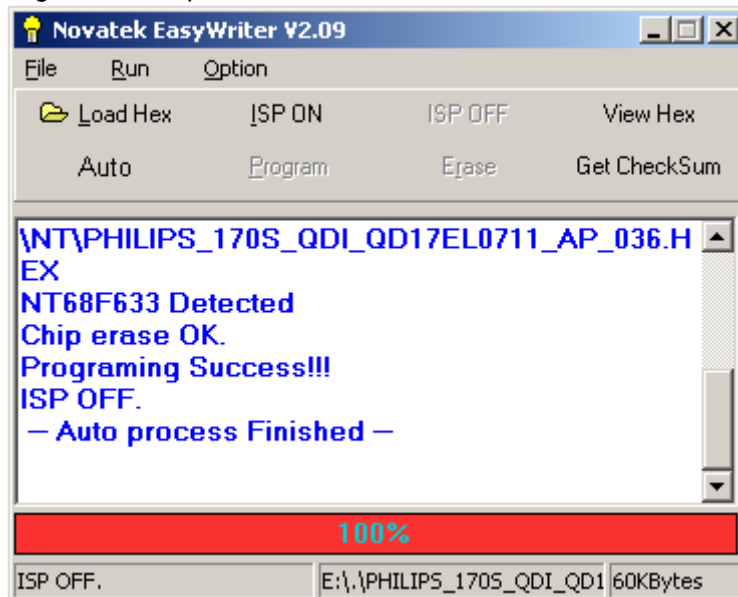

13. DDC Instruction

General

DDC Data Re-programming

In case the main EEPROM with Software DDC which store all factory settings were replaced because a defect, repaired monitor' the serial numbers have to be re-programmed.

It is advised to re- soldered the main EEPROM with Software DDC from the old board onto the new board if circuit board have been replaced, in this case the DDC data does not need to be re-programmed.


Additional information Additional information about DDC (Display Data Channel) may be obtained from Video Electronics Standards Association (VESA). Extended Display Identification Data (EDID) information may be also obtained from VESA.

System and equipment requirements

1. An i486 (or above) personal computer or compatible.
2. Microsoft operation system Windows 95/98/2000/XP.
3. "WinDDC,PORT95NT,config,W,CHECK,Philips 170S EDID" program.
4. Software DDC Alignment kits

The kit contents:

- a. DDC Board x1
- b. Printer cablex1
- c. D-Sub cable x1
- d. 12V DC power source

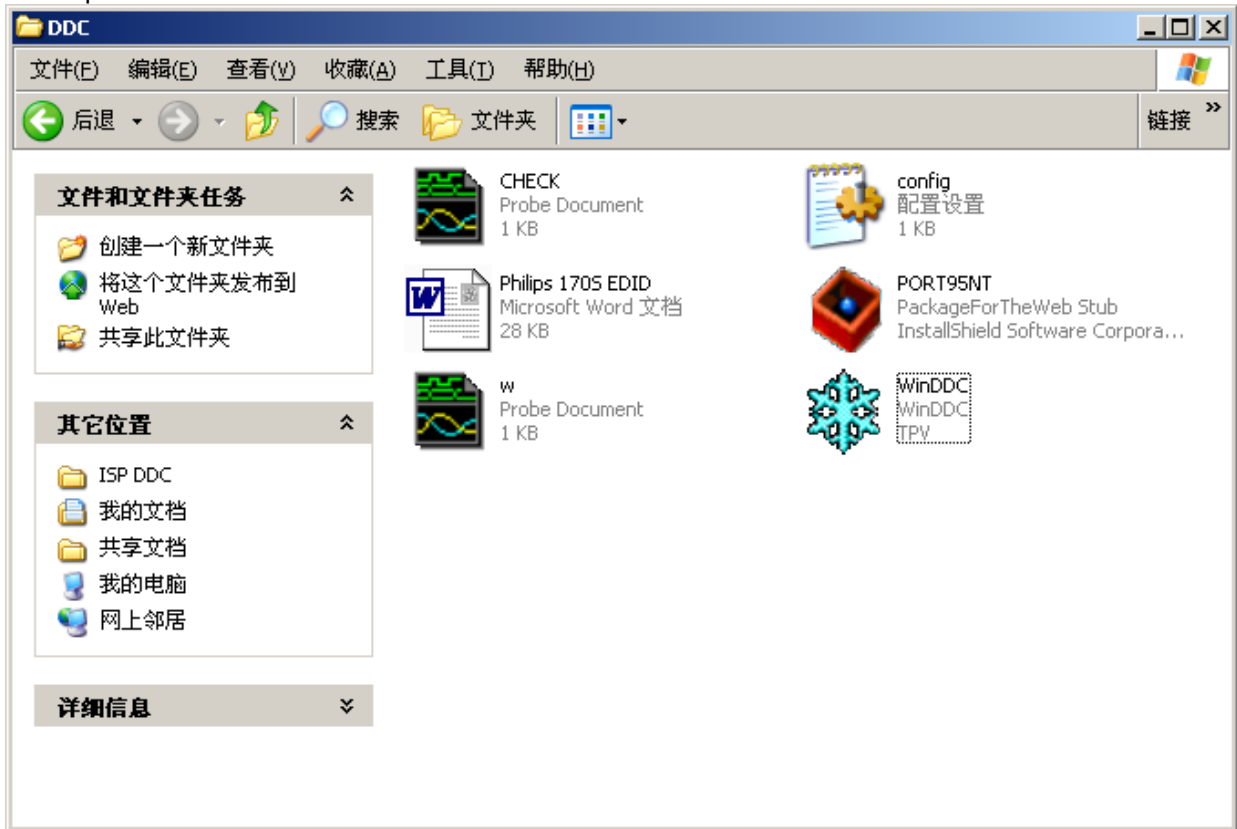


(1). Install software







PORT95NT.EXE
PackageForTheWeb Stub
InstallShield Software Corpora...


You must install the

at the first. The processing as follows:

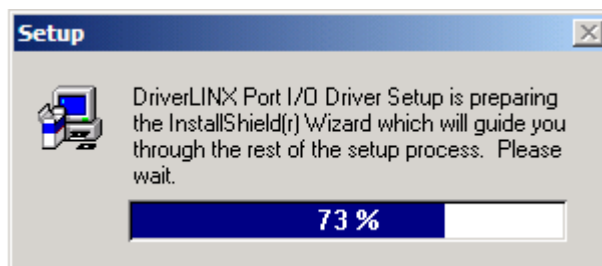

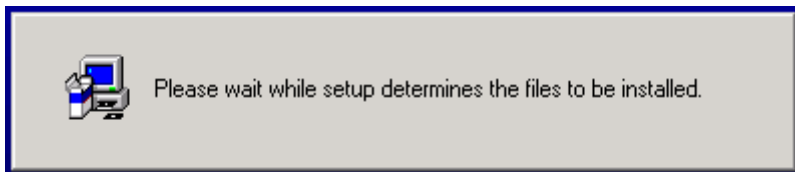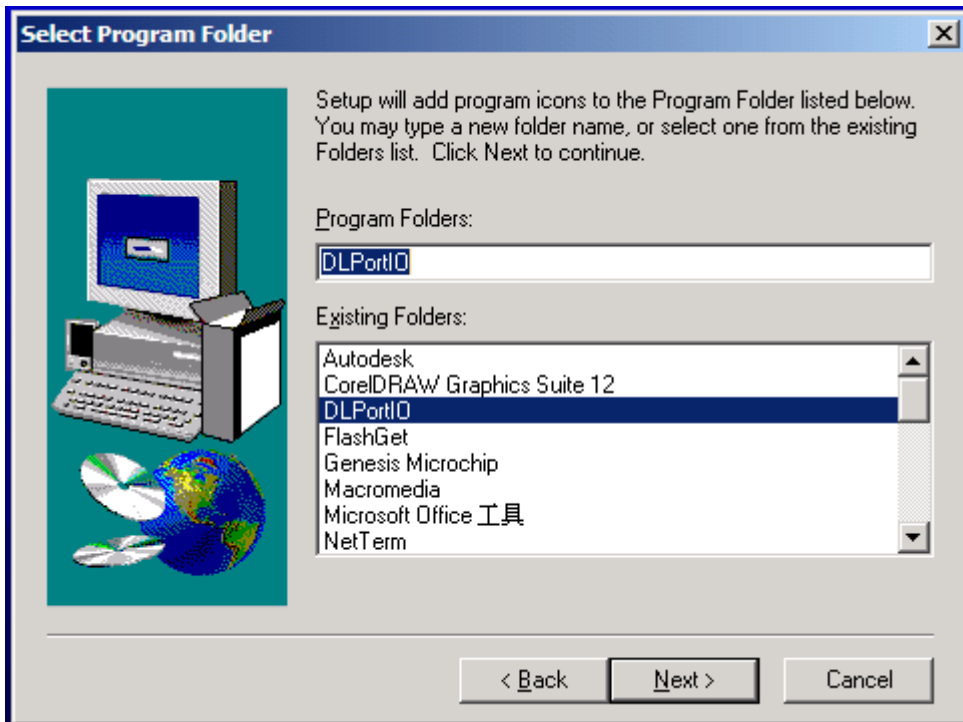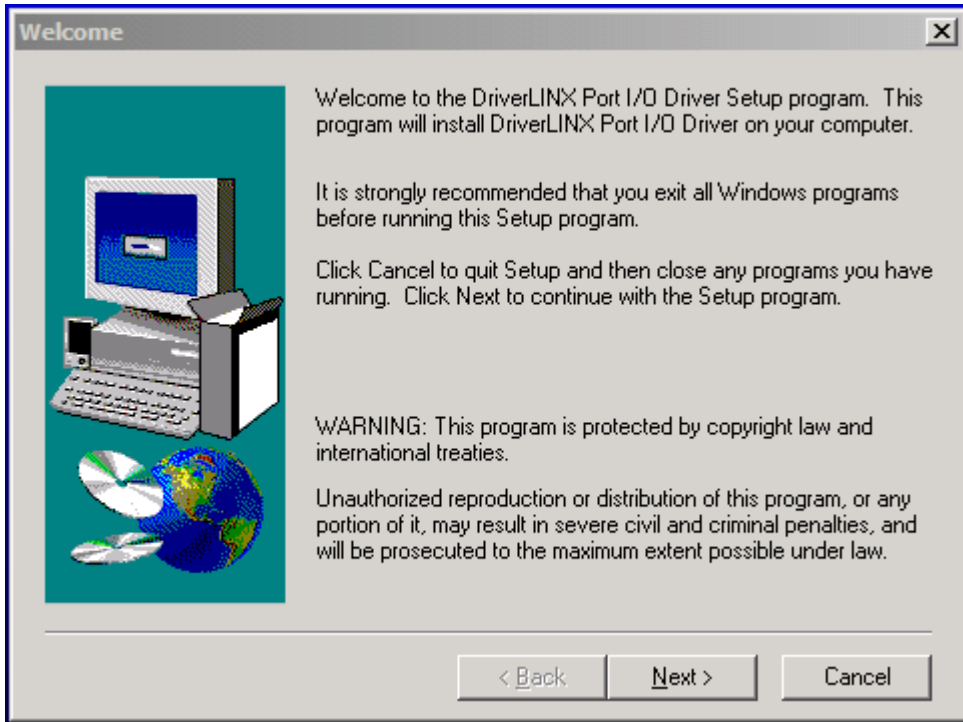



Click  to complete the installation.

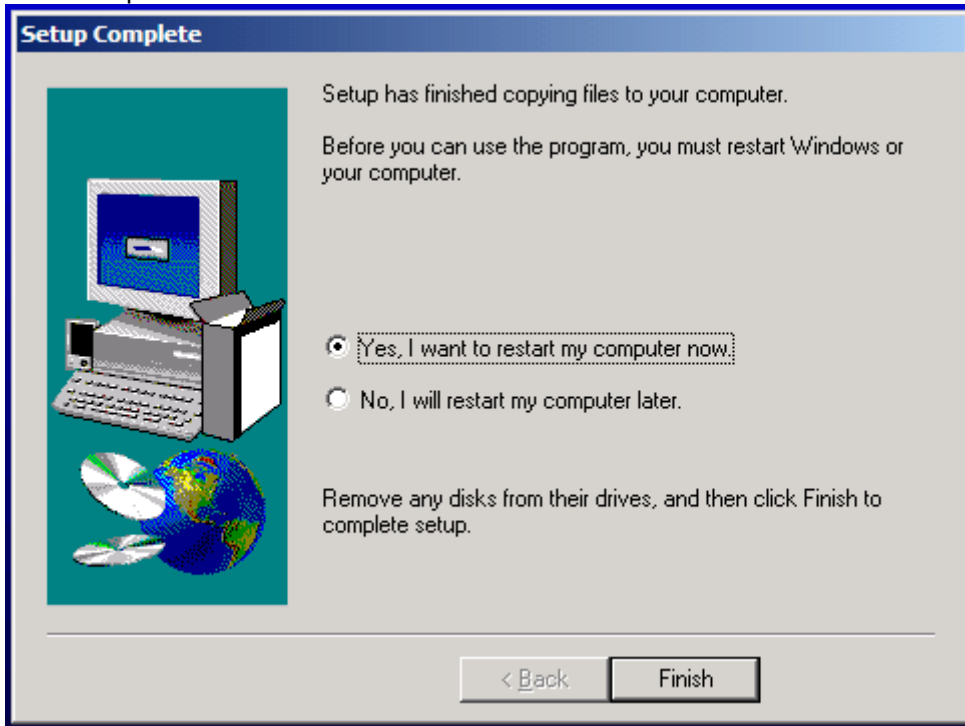


Note: After installation, you must restart the PC to take the setup effect.


(2). Connect the DDC board as follow:

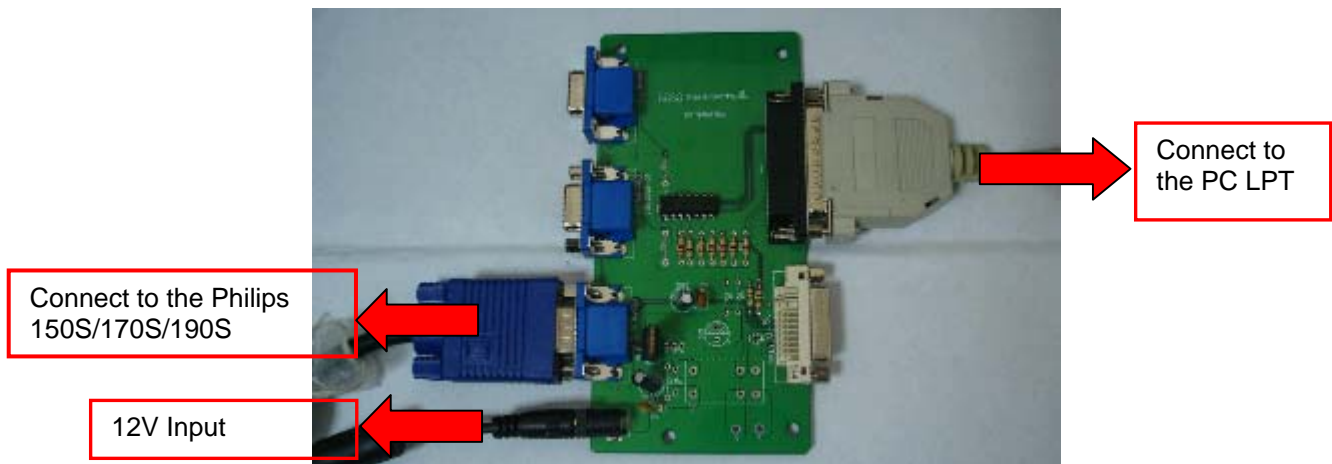


a. Double-click , appear as follow Figs:

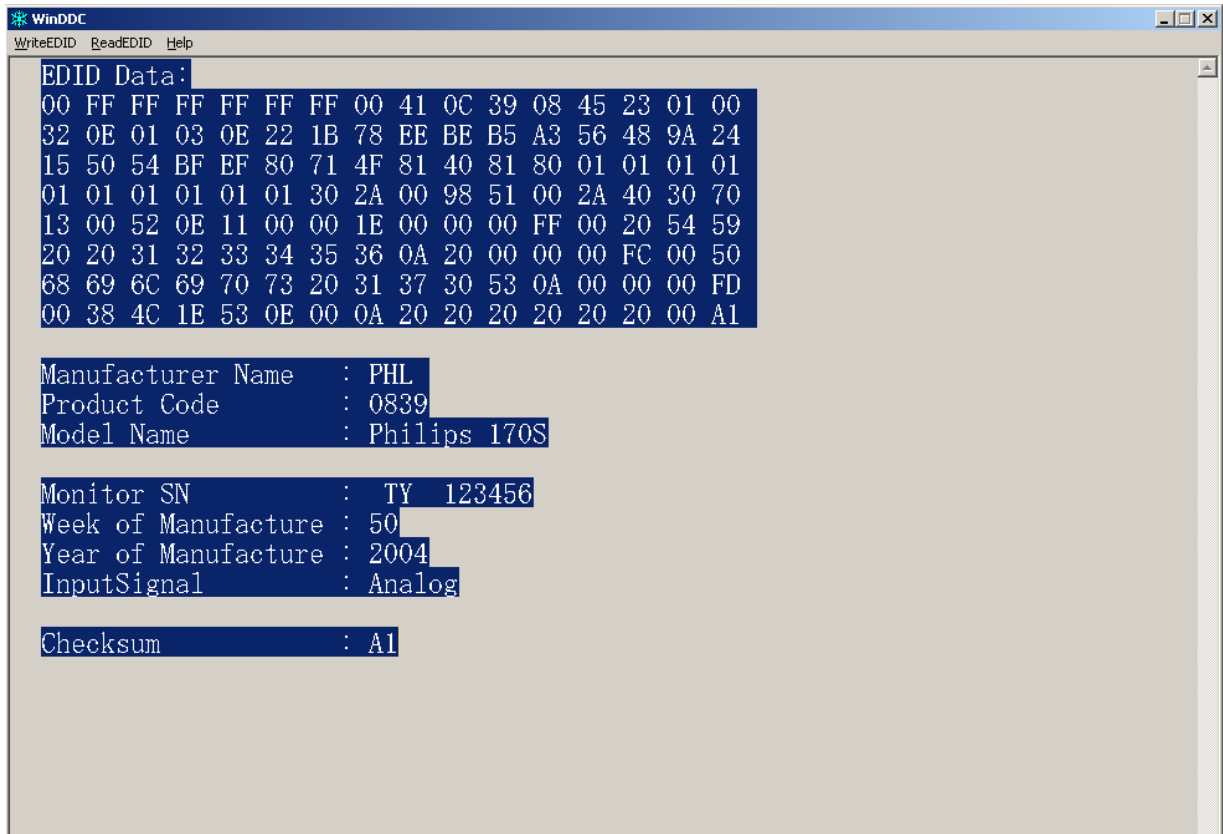

b. Click 

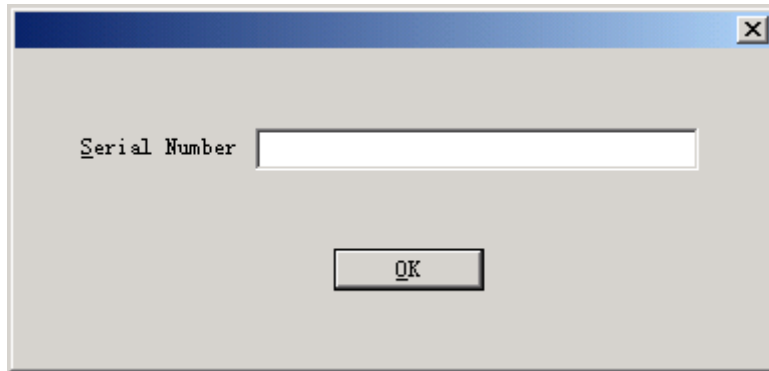


c. Key in the Serial Number printed on the barcode label, then click "OK"

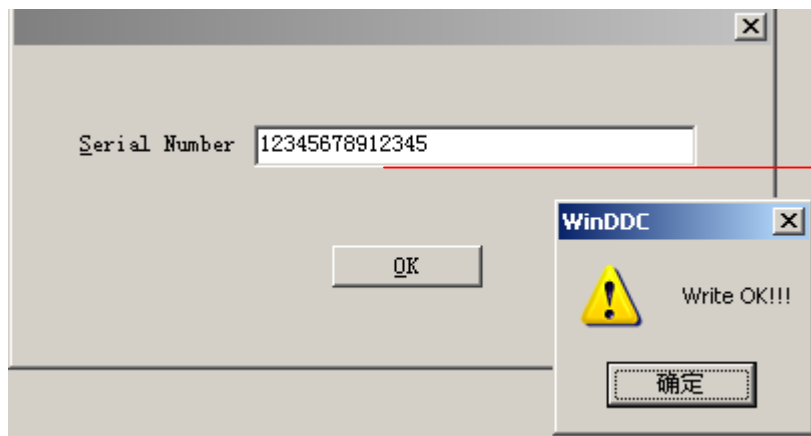

14 codes,
for example.

d. Unit appears the following Fig, writer completed.

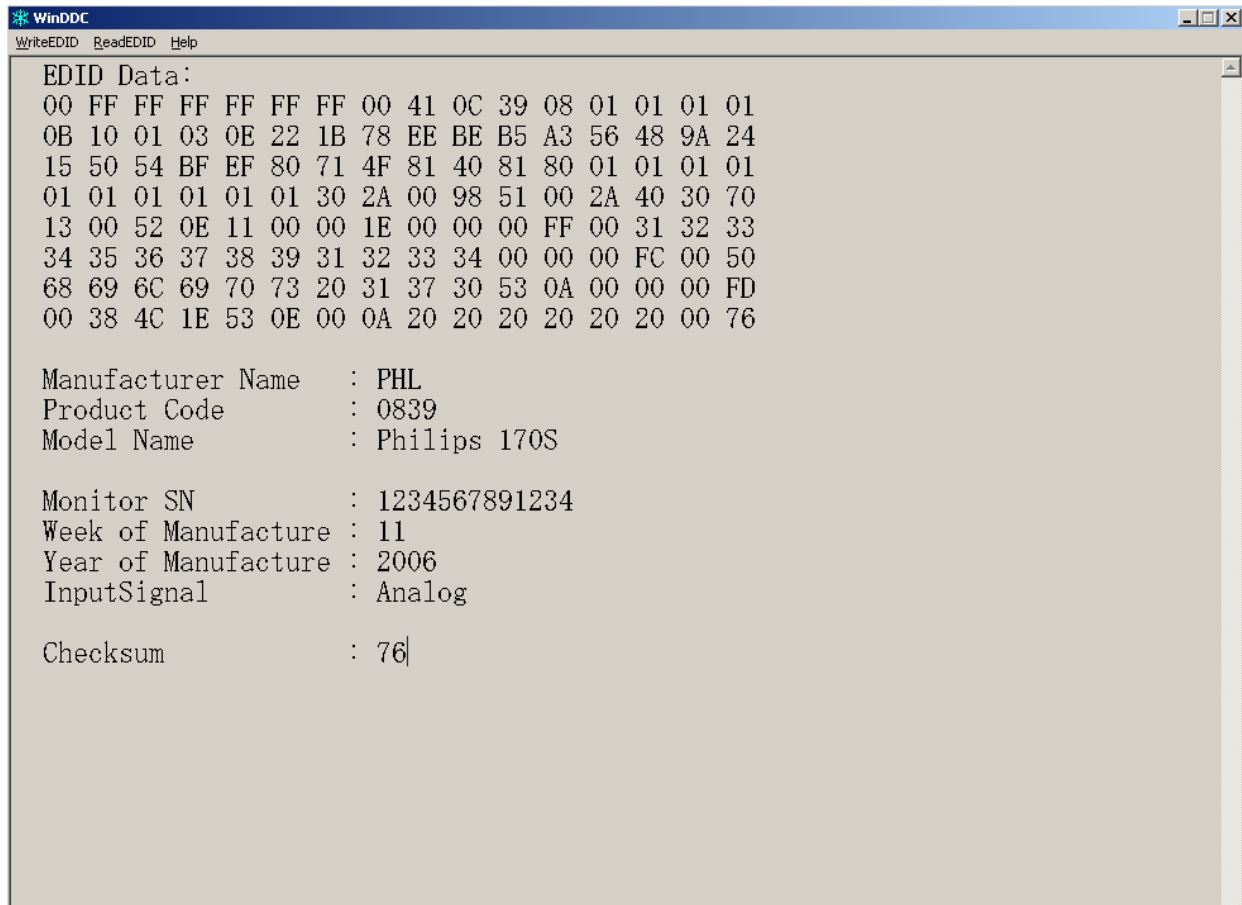

The screenshot shows a window titled "WinDDC" with a menu bar containing "WriteEDID", "ReadEDID", and "Help". The main content area displays the following EDID data:

```
EDID Data:
00 FF FF FF FF FF FF 00 41 0C 39 08 01 01 01 01
0B 10 01 03 0E 22 1B 78 EE BE B5 A3 56 48 9A 24
15 50 54 BF EF 80 71 4F 81 40 81 80 01 01 01 01
01 01 01 01 01 01 30 2A 00 98 51 00 2A 40 30 70
13 00 52 0E 11 00 00 1E 00 00 00 FF 00 31 32 33
34 35 36 37 38 39 31 32 33 34 00 00 00 FC 00 50
68 69 6C 69 70 73 20 31 37 30 53 0A 00 00 00 FD
00 38 4C 1E 53 0E 00 0A 20 20 20 20 20 20 00 76

Manufacturer Name   : PHL
Product Code       : 0839
Model Name         : Philips 170S

Monitor SN         : 1234567891234
Week of Manufacture : 11
Year of Manufacture : 2006
InputSignal        : Analog

Checksum           : 76|
```

170S EDID Program

128 bytes EDID Data (Hex):

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15

0: 00 FF FF FF FF FF FF 00 41 0C 39 08 01 01 01 01
 16: 0A 10 01 03 0E 22 1B 78 EE BE B5 A3 56 48 9A 24
 32: 15 50 54 BF EF 80 71 4F 81 40 81 80 01 01 01 01
 48: 01 01 01 01 01 01 30 2A 00 98 51 00 2A 40 30 70
 64: 13 00 52 0E 11 00 00 1E 00 00 00 FF 00 20 41 55
 80: 20 20 30 30 30 30 31 0A 20 00 00 00 FC 00 50
 96: 68 69 6C 69 70 73 20 31 37 30 53 0A 00 00 00 FD
 112: 00 38 4C 1E 53 0E 00 0A 20 20 20 20 20 00 DD

Decoded EDID data

<---Header--->

Header: 00 FF FF FF FF FF FF 00

<-x-Header-x->

<---Vendor/Product Identification--->

ID Manufacturer Name: PHL
 ID Product Code: 0839
 ID Serial Number: 01010101
 Week of Manufacture: 10
 Year of Manufacture: 2006

<-x-Vendor/Product Identification-x->

<---EDID Structure Version/Revision--->

EDID Version#: 01
 EDID Revision#: 03

<-x-EDID Structure Version/Revision-x->

<---Basic Display Parameters/Features--->

Video i/p definition: Analog
 Signal Level Standard: 0.700V/0.300V(1.000Vpp)
 Setup: Blank-to-Black not expected
 Separate Sync Support: Yes
 Composite Sync Support: Yes
 Sync. on green video supported: Yes
 Serration of the Vsync.Pulse is not required.
 Max. H. Image Size : 34cm.
 Max. V. Image Size : 27cm.
 Display Gamma: 2.2
 DPMS Features, Stand-by: Yes.
 DPMS Features, Suspend: Yes.
 DPMS Features, Active off: Yes.
 Display Type: R.G.B color display.
 Standard Default Color Space: Primary color space.
 Preferred Timing Mode: In First Detailed Timing.
 GTF supported: No.

<---Basic Display Parameters/Features--->

<---Color Characteristics--->

Red x: 0.6386718750
 Red y: 0.3388671875
 Green x: 0.2861328125
 Green y: 0.6035156250
 Blue x: 0.1425781250
 Blue y: 0.0849609375
 White x: 0.3125000000
 White y: 0.3300781250

<-x-Color Characteristics-x->

<---Established Timings--->

Established Timings 1: BF

- 720x400 @70Hz VGA,IBM
- 640x480 @60Hz VGA,IBM
- 640x480 @67Hz Apple,Mac II
- 640x480 @72Hz VESA
- 640x480 @75Hz VESA
- 800x600 @56Hz VESA
- 800x600 @60Hz VESA

Established Timings 2: EF

- 800x600 @72Hz VESA
- 800x600 @75Hz VESA
- 832x624 @75Hz Apple,Mac II
- 1024x768 @60Hz VESA
- 1024x768 @70Hz VESA
- 1024x768 @75Hz VESA
- 1280x1024 @75Hz VESA

Established Timings 3: 80

- 1152x870 @75Hz Apple,Mac II

<-x-Established Timings-x->

<---Standard Timing Identification--->

- 1152x864 @75
- 1280x960 @60
- 1280x1024 @60

<-x-Standard Timing Identification-x->

<---Detailed Timing Descriptions--->

Detailed Timing: 1280x1024 @ 60Hz.

<-x-Detailed Timing Descriptions-x->

<---Detailed Timing Descriptions--->

Detailed Timing: FF (Monitor SN) 'AU 000001'
 Detailed Timing: FC (Monitor Name) 'Philips 170S'
 Detailed Timing: FD (Monitor limits)
 Min. V. rate: 56Hz
 Max. V. rate: 76Hz
 Min. H. rate: 30KHz
 Max. H. rate: 83KHz
 Max. Pixel Clock: 140MHz

<-x-Detailed Timing Descriptions-x->

Extension Flag: 00

Checksum: DD

14. White Balance, Luminance Adjustment

Approximately 30 minutes should be allowed for warm up before proceeding White-Balance adjustment.

1. Required instruments: Chroma 7120、 Chroma 2325 (BGA265A)。
2. First connect the instruments together and turn on the LCD power.
3. Set Chroma 2325 (BGA265A) to be T144 (1280*1024/60HZ) and P105 of full white screen.
4. **Enter into the factory mode:**
 Firstly, turn off the power, press the AUTO and OK at one time, and then turn the power on (AUTO and OK are still pressed, about 10s), release, press the menu again will activate the factory mode, the factory OSD will be at the left top of the screen.

 Move the cursor to select the Hyson 170S7*****, press OK button to enter into the sub-menu; Move the cursor again to select " Cool/warm ".
5. Set Chroma-7120 CH3 as 9300K color temperature by ID key, press SC and Next key set 9300K: $x=283\pm 20$, $y=297\pm 20$, $Y>230$.

 Set Chroma-7120 CH4 as 6500K color temperature by ID key, press SC and Next key set 6500K: $x=313\pm 20$, $y=329\pm 20$, $Y>200$.
6. Adjust 9300K color temperature:
 - 1). Switch the Chroma-7120 to RGB-Mode (with press "MODE" button)
 - 2). Switch the MEM. Channel to Channel 3 (with up or down arrow on chroma 7120)
 - 3). Adjust the **R** of Cool item on factory window until chroma 7120 indicator reached the value $R=100\pm 5$
 - 4). Adjust the **G** of Cool item on factory window until chroma 7120 indicator reached the value $G=100\pm 5$
 - 5). Adjust the **B** of Cool item on factory window until chroma 7120 indicator reached the value $B=100\pm 5$
 - 6). Switch the Chroma-7120 to x, y, Y Mode (with press "MODE" button), check whether the color-temperature value is within Spec (the Spec is 9300K: $x=283\pm 20$, $y=297\pm 20$, $Y>230$). If not in the SPEC, repeat step 3,4,5.
7. Adjust 6500K/SRGB color temperature:
 - 1). Switch the Chroma-7120 to RGB-Mode (with press "MODE" button)
 - 2). Switch the MEM. Channel to Channel 4 (with up or down arrow on chroma 7120)
 - 3). Adjust the **R** of Warm item on factory window until chroma 7120 indicator reached the value $R=100\pm 5$
 - 4). Adjust the **G** of Warm item on factory window until chroma 7120 indicator reached the value $G=100\pm 5$
 - 5). Adjust the **B** of Warm item on factory window until chroma 7120 indicator reached the value $B=100\pm 5$
 - 6). Switch the Chroma-7120 to x, y, Y Mode, check whether the color-temperature value is within Spec.
 the Spec is 6500K: $x=313\pm 20$, $y=329\pm 20$, $Y>200$. If not in the SPEC, repeat step 3,4,5.

Turn the Power-button off to quit and save the factory mode.

15. Spare Parts List

170S7FS/00

PCB

| Part No for TPV | Description | Philips 12NC |
|-----------------|------------------------|----------------|
| CBPC780KGMPPH | CONVERSION BOARD ASS'Y | 9965 000 37409 |
| CBPC780KQMPHP | CONVERSION BOARD | 9965 000 37010 |
| PWPC1742QDR1P | POWER BOARD | 9965 000 37020 |
| KEPC780KE7P | KEY BOARD | 9965 000 35900 |

Panel

| Part No for TPV | Description | Philips 12NC | Remark |
|--------------------|---------------------------------|----------------|----------------|
| 750GLG70E1B11 | LPL 17" TLBB PANEL | 9965 000 37540 | |
| 750GLQ70L0761 | QDI 17" V11 PANEL | 9965 000 37541 | |
| 750GLC70A7Q12M000F | PANEL LCD EA07Q 272 PHILIPS CPT | 996500038183 | Add 2nd source |

Accessory and Mechanical

| Part No for TPV | Description | Philips 12NC |
|-----------------|------------------------------|----------------|
| 089G728GAA550 | SIGNAL CABLE D-SUB GREATIAND | 9965 000 35909 |
| 089G179E30C4 | FFC CABLE P-TWO | 9965 000 37008 |
| P15G82991 | BKT-VESA | 9965 000 35919 |
| P15G83151 | MAIN FRAME | 9965 000 37012 |
| P15G83161 | POWER BRACKET | 9965 000 37013 |
| P33G4972VB1L | COVER_HINGE | 9965 000 35921 |
| P33G4989VPA1C | CONTROL BUTTON | 9965 000 37108 |
| P34G1846VOA1T | BEZEL | 9965 000 37447 |
| P34G1850VB1T | REAR_COVER | 9965 000 37016 |
| P37G5591VO | HINGE | 9965 000 37110 |
| P85G7421 | POWER SHIELDING | 9965 000 37023 |

Main Board (LPL)

| Location | Part No for TPV | Description | Philips 12NC |
|----------|-----------------|--------------------------------|----------------|
| | CBPC780KGMPPH | CONVERSION BOARD ASS'Y | 9965 000 37409 |
| CN406 | 033G801930FH | FPC CONN. 1.0MM 30P | 9965 000 36924 |
| C712 | 067G215L1014N | KY25VB100M-L 6.3*11 | 9965 000 35958 |
| C711 | 067G215L1014N | KY25VB100M-L 6.3*11 | 9965 000 35958 |
| C710 | 067G215L1014N | KY25VB100M-L 6.3*11 | 9965 000 35958 |
| C432 | 067G215Y4797N | LOW ESR EC 4.7 UF 50V NCC | 9965 000 35959 |
| C709 | 067G215L1014N | KY25VB100M-L 6.3*11 | 9965 000 35958 |
| CN405 | 088G35315FH | D-SUB 15PIN | 9965 000 35960 |
| X401 | 093G2251 | CRYSTAL 12MHZ HC-49US ARG6-120 | 9965 000 35961 |
| U401 | 056G562112 | NT68623MEFG-64 | 9965 000 35962 |
| U701 | 056G5637 | AIC1084-33PM | 9965 000 37095 |
| U702 | 056G56331 | AI1117D-1.8-EI | 9965 000 35963 |
| U403 | 056G113324 | AT24C16AN-10SU-2.7 | 9965 000 35964 |
| U405 | 056G113334 | M24C02-WMN6TP | 9965 000 35965 |
| Q401 | 057G4174 | PMBS3904/PHILIPS-SMT(04) | 9965 000 35966 |
| Q406 | 057G4174 | PMBS3904/PHILIPS-SMT(04) | 9965 000 35966 |
| Q402 | 057G41713T | KEC 2N3906S-RTK/PS | 9965 000 35967 |
| Q404 | 057G41713T | KEC 2N3906S-RTK/PS | 9965 000 35967 |
| Q405 | 057G7631 | A03401 SOT23 BY AOS(A1) | 9965 000 35968 |
| FB401 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| R411 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R410 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R408 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R407 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R406 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R405 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R422 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R485 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R433 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R432 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R431 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R428 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R427 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R426 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R420 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R472 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R458 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R419 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R418 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R417 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R414 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R402 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |

| | | | |
|-------|----------------|-------------------------------|----------------|
| R401 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R403 | 061L0603104 | RST SM 0603 RC0603 100K PM5 R | 9965 000 35972 |
| R404 | 061L0603104 | RST SM 0603 RC0603 100K PM5 R | 9965 000 35972 |
| R434 | 061L0603105 | RST SM 0603 RC0603 1M PM5 R | 9965 000 35973 |
| R424 | 061L0603151 | CHIPR 150 OHM -5% 1/16W | 9965 000 35974 |
| R423 | 061L0603151 | CHIPR 150 OHM -5% 1/16W | 9965 000 35974 |
| R421 | 061L0603151 | CHIPR 150 OHM -5% 1/16W | 9965 000 35974 |
| R437 | 061L0603201 | CHIP 200 OHM 1/16W | 9965 000 35975 |
| R438 | 061L0603201 | CHIP 200 OHM 1/16W | 9965 000 35975 |
| R440 | 061L0603221 | CHIPR 220 OHM -5% 1/16W | 9965 000 35976 |
| R441 | 061L0603221 | CHIPR 220 OHM -5% 1/16W | 9965 000 35976 |
| R435 | 061L0603222 | CHIPR 2.2K OHM -5% 1/16W | 9965 000 35977 |
| R436 | 061L0603222 | CHIPR 2.2K OHM -5% 1/16W | 9965 000 35977 |
| R443 | 061L0603332 | CHIP 3.3K OHM 1/10W | 9965 000 35978 |
| R442 | 061L0603332 | CHIP 3.3K OHM 1/10W | 9965 000 35978 |
| R445 | 061L06033900F | CHIP 390 OHM 1/10W 1% | 9965 000 35979 |
| R701 | 061L0603470 | CHIPR 47 OHM -5% 1/16W | 9965 000 35980 |
| R479 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R478 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R476 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R460 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R459 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R449 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R448 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R447 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R446 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R451 | 061L0603750 | CHIPR 75 OHM -5% 1/16W | 9965 000 35982 |
| R452 | 061L0603750 | CHIPR 75 OHM -5% 1/16W | 9965 000 35982 |
| R453 | 061L0603750 | CHIPR 75 OHM -5% 1/16W | 9965 000 35982 |
| R454 | 061L06037509F | 75OHM 1% 1/10W | 9965 000 35983 |
| R455 | 061L06037509F | 75OHM 1% 1/10W | 9965 000 35983 |
| R456 | 061L06037509F | 75OHM 1% 1/10W | 9965 000 35983 |
| FB410 | 061L0805000 | CHIPR 0OHM -5% 1/10W | 9965 000 35984 |
| R444 | 061L1206151 | CHIP 150OHM 1/4W | 9965 000 36068 |
| C714 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C713 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C455 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C454 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C441 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C440 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C439 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C438 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C437 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C433 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C434 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C402 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |

| | | | |
|-------|----------------|----------------------------|----------------|
| C701 | 065G040210232T | 0402 MLCC 1000PF K 50V | 9965 000 35987 |
| C401 | 065G040210232T | 0402 MLCC 1000PF K 50V | 9965 000 35987 |
| C422 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C423 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C424 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C425 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C436 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C446 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C702 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C703 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C704 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C705 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C706 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C409 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C410 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C411 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C413 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C414 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C416 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C417 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C418 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C419 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C420 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C421 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C430 | 065G040222031T | 0402 MLCC 22PF J 50V | 9965 000 35989 |
| C428 | 065G040222031T | 0402 MLCC 22PF J 50V | 9965 000 35989 |
| C427 | 065G040222031T | 0402 MLCC 22PF J 50V | 9965 000 35989 |
| C412 | 065G0402224A5T | MLCC 0402 0.22UF K 10V X5R | 9965 000 35990 |
| C403 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C404 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C405 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C406 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C407 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C408 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| FB407 | 071G56F102K | CHIP BEAD 1KOHM | 9965 000 35992 |
| D401 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D406 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D405 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D404 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D416 | 093G6442PP | BAV70 SOT-23 | 9965 000 35995 |
| ZD414 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD408 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD407 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD402 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD401 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD404 | 093G39S34T | UDZS5.6B | 9965 000 35996 |

| | | | |
|-------|-------------|-----------|----------------|
| ZD403 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| FB411 | 071G56K121M | CHIP BEAD | 9965 000 36567 |

Main Board(QDI)

| Location | Part No for TPV | Description | Philips 12NC |
|----------|-----------------|--------------------------------|----------------|
| | CBPC780QMPPH | CONVERSION BOARD | 9965 000 37010 |
| CN406 | 033G801930FH | FPC CONN. 1.0MM 30P | 9965 000 36924 |
| C712 | 067G215L1014N | KY25VB100M-L 6.3*11 | 9965 000 35958 |
| C711 | 067G215L1014N | KY25VB100M-L 6.3*11 | 9965 000 35958 |
| C710 | 067G215L1014N | KY25VB100M-L 6.3*11 | 9965 000 35958 |
| C709 | 067G215L1014N | KY25VB100M-L 6.3*11 | 9965 000 35958 |
| C432 | 067G215Y4797N | LOW ESR EC 4.7 UF 50V NCC | 9965 000 35959 |
| CN405 | 088G35315FH | D-SUB 15PIN | 9965 000 35960 |
| X401 | 093G2251 | CRYSTAL 12MHZ HC-49US ARG6-120 | 9965 000 35961 |
| U401 | 056G562112 | NT68623MEFG-64 | 9965 000 35962 |
| U701 | 056G5637 | AIC1084-33PM | 9965 000 37095 |
| U702 | 056G56331 | AI1117D-1.8-EI | 9965 000 35963 |
| U403 | 056G113324 | AT24C16AN-10SU-2.7 | 9965 000 35964 |
| U405 | 056G113334 | M24C02-WMN6TP | 9965 000 35965 |
| Q401 | 057G4174 | PMBS3904/PHILIPS-SMT(04) | 9965 000 35966 |
| Q406 | 057G4174 | PMBS3904/PHILIPS-SMT(04) | 9965 000 35966 |
| Q402 | 057G41713T | KEC 2N3906S-RTK/PS | 9965 000 35967 |
| Q404 | 057G41713T | KEC 2N3906S-RTK/PS | 9965 000 35967 |
| Q405 | 057G7631 | A03401 SOT23 BY AOS(A1) | 9965 000 35968 |
| FB702 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB401 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| R411 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R410 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R408 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R407 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R406 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R405 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R422 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R485 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R433 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R432 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R431 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R428 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R427 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R426 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R420 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R472 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R458 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R419 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R418 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |

| | | | |
|-------|----------------|-------------------------------|----------------|
| R417 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R414 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R402 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R401 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R403 | 061L0603104 | RST SM 0603 RC0603 100K PM5 R | 9965 000 35972 |
| R404 | 061L0603104 | RST SM 0603 RC0603 100K PM5 R | 9965 000 35972 |
| R434 | 061L0603105 | RST SM 0603 RC0603 1M PM5 R | 9965 000 35973 |
| R421 | 061L0603151 | CHIPR 150 OHM -5% 1/16W | 9965 000 35974 |
| R423 | 061L0603151 | CHIPR 150 OHM -5% 1/16W | 9965 000 35974 |
| R424 | 061L0603151 | CHIPR 150 OHM -5% 1/16W | 9965 000 35974 |
| R438 | 061L0603201 | CHIP 200 OHM 1/16W | 9965 000 35975 |
| R437 | 061L0603201 | CHIP 200 OHM 1/16W | 9965 000 35975 |
| R440 | 061L0603221 | CHIPR 220 OHM -5% 1/16W | 9965 000 35976 |
| R441 | 061L0603221 | CHIPR 220 OHM -5% 1/16W | 9965 000 35976 |
| R435 | 061L0603222 | CHIPR 2.2K OHM -5% 1/16W | 9965 000 35977 |
| R436 | 061L0603222 | CHIPR 2.2K OHM -5% 1/16W | 9965 000 35977 |
| R443 | 061L0603332 | CHIP 3.3K OHM 1/10W | 9965 000 35978 |
| R442 | 061L0603332 | CHIP 3.3K OHM 1/10W | 9965 000 35978 |
| R445 | 061L06033900F | CHIP 390 OHM 1/10W 1% | 9965 000 35979 |
| R701 | 061L0603470 | CHIPR 47 OHM -5% 1/16W | 9965 000 35980 |
| R479 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R478 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R476 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R460 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R459 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R449 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R448 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R447 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R446 | 061L0603472 | CHIPR 4.7K OHM -5% 1/16W | 9965 000 35981 |
| R453 | 061L0603750 | CHIPR 75 OHM -5% 1/16W | 9965 000 35982 |
| R452 | 061L0603750 | CHIPR 75 OHM -5% 1/16W | 9965 000 35982 |
| R451 | 061L0603750 | CHIPR 75 OHM -5% 1/16W | 9965 000 35982 |
| R454 | 061L06037509F | 75OHM 1% 1/10W | 9965 000 35983 |
| R455 | 061L06037509F | 75OHM 1% 1/10W | 9965 000 35983 |
| R456 | 061L06037509F | 75OHM 1% 1/10W | 9965 000 35983 |
| FB410 | 061L0805000 | CHIPR 0OHM -5% 1/10W | 9965 000 35984 |
| R444 | 061L1206151 | CHIP 150OHM 1/4W | 9965 000 36068 |
| C402 | 065G040210131T | 0402 MLCC 100PF J 50V | 9965 000 35986 |
| C401 | 065G040210232T | 0402 MLCC 1000PF K 50V | 9965 000 35987 |
| C701 | 065G040210232T | 0402 MLCC 1000PF K 50V | 9965 000 35987 |
| C422 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C423 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C424 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C425 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C436 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C446 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |

| | | | |
|-------|----------------|----------------------------|----------------|
| C702 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C703 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C704 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C705 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C706 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C409 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C410 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C411 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C413 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C414 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C416 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C417 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C418 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C419 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C420 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C421 | 065G040210415T | 0402 MLCC 0.1UF K 16V | 9965 000 35988 |
| C427 | 065G040222031T | 0402 MLCC 22PF J 50V | 9965 000 35989 |
| C428 | 065G040222031T | 0402 MLCC 22PF J 50V | 9965 000 35989 |
| C430 | 065G040222031T | 0402 MLCC 22PF J 50V | 9965 000 35989 |
| C412 | 065G0402224A5T | MLCC 0402 0.22UF K 10V X5R | 9965 000 35990 |
| C403 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C404 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C405 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C406 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C407 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| C408 | 065G040247312T | 0402 MLCC 47NF K 16V | 9965 000 35991 |
| FB407 | 071G56F102K | CHIP BEAD 1KOHM | 9965 000 35992 |
| D401 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D406 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D405 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D404 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D416 | 093G6442PP | BAV70 SOT-23 | 9965 000 35995 |
| ZD414 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD408 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD407 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD401 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD404 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD403 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| FB705 | 071G56K121M | CHIP BEAD | 9965 000 36567 |

Power Board

| Location | Part No for TPV | Description | Philips 12NC |
|----------|-----------------|---------------------------|----------------|
| | PWPC1742QDR1P | POWER BOARD | 9965 000 37020 |
| IC902 | 056G1393A | PC123Y22FZOF | 9965 000 36055 |
| NR901 | 061G5810T | 8 OHM 4A NTCR BY THINKING | 9965 000 36938 |
| IC941 | 056G15810T | AZ431AZ-AE1 | 9965 000 36101 |
| R905 | 061G152M10464 | 100KOHM 5% 2W | 9965 000 36939 |
| R920 | 061G152M20864 | 0.20 OHM 2W | 9965 000 36940 |
| C808 | 065G3J5096ET | 5PF 5% SL 3KV | 9965 000 36941 |
| C807 | 065G3J5096ET | 5PF 5% SL 3KV | 9965 000 36941 |
| C803 | 065G3J5096ET | 5PF 5% SL 3KV | 9965 000 36941 |
| C802 | 065G3J5096ET | 5PF 5% SL 3KV | 9965 000 36941 |
| C801 | 065G6J1006ET | 10PF 5% SL 6KV | 9965 000 36942 |
| C806 | 065G6J1006ET | 10PF 5% SL 6KV | 9965 000 36942 |
| C900 | 065G305M1022BP | Y2 1000PF M 250VAC Y5P | 9965 000 36943 |
| C901 | 065G305M1022BP | Y2 1000PF M 250VAC Y5P | 9965 000 36943 |
| C912 | 065G305M2222BP | 2200PF -20% | 9965 000 36944 |
| C936 | 067G215D2222KV | 105Σ 2200UF M 10V | 9965 000 36945 |
| C840 | 067G215D4714K | ED 470UF 25V | 9965 000 36007 |
| C820 | 067G215D4714K | ED 470UF 25V | 9965 000 36007 |
| C907 | 067G215S10115K | 100UF 450V | 9965 000 36086 |
| C932 | 067G215S1024K | ED1000UF 25V | 9965 000 36946 |
| C933 | 067G215S1024K | ED1000UF 25V | 9965 000 36946 |
| L903 | 071G5524 | FERRITE BEAD | 9965 000 36947 |
| L901 | 073G17465LS | LINE FILTER BY LISHIN | 9965 000 36025 |
| L955 | 073G253902T | CKOLE COIL 0.8UH | 9965 000 36948 |
| L951 | 073G253902T | CKOLE COIL 0.8UH | 9965 000 36948 |
| T901 | 080GL17T900T | X'FMR SRW28LEC-T93H016 | 9965 000 36950 |
| PT802 | 080GL19T8DN1 | X'FMR DARFONTK.2006M.101 | 9965 000 36093 |
| F901 | 084G557GP | FUSE 3.15A 250V | 9965 000 37006 |
| CN901 | 087G50132S | AC SOCKET | 9965 000 36028 |
| BD901 | 093G5046016 | U4KB80R | 9965 000 36951 |
| D901 | 093G6026T52T | RECTIFIER DIODE FR107 | 9965 000 36030 |
| CN951 | 095G80131215 | HARNESS | 9965 000 36953 |
| | 705G078057001 | Q920 ASS'Y | 9965 000 36954 |
| | 705G078093010 | D931 ASS'Y | 9965 000 36955 |
| | 705G078093011 | D935 ASS'Y | 9965 000 36956 |
| Q901 | 057G60035 | STP8NK80ZFP | 9965 000 36959 |
| D931 | 093G60267 | SP10100 | 9965 000 36957 |
| D935 | 093G15062 | FMW-2156 | 9965 000 36958 |
| IC901 | 056G564911 | IC TEA1532AT S08 | 9965 000 36960 |
| U811 | 056G60810 | OZ9938 | 9965 000 36059 |
| Q874 | 057G41712T | KEC 2N3904S-RTK/PS | 9965 000 36961 |
| Q886 | 057G7592 | RK7002 | 9965 000 36033 |
| Q885 | 057G7592 | RK7002 | 9965 000 36033 |

| | | | |
|-------|---------------|--------------------------|----------------|
| Q883 | 057G7592 | RK7002 | 9965 000 36033 |
| Q881 | 057G7592 | RK7002 | 9965 000 36033 |
| Q871 | 057G7592 | RK7002 | 9965 000 36033 |
| Q873 | 057G7604B | PDTA144WK SOT346 | 9965 000 36962 |
| Q841 | 057G76314 | AM9945N | 9965 000 36100 |
| Q821 | 057G76314 | AM9945N | 9965 000 36100 |
| RJ827 | 061L0805000 | CHIPR 0OHM -5% 1/10W | 9965 000 35984 |
| R849 | 061L0805000 | CHIPR 0OHM -5% 1/10W | 9965 000 35984 |
| R829 | 061L0805000 | CHIPR 0OHM -5% 1/10W | 9965 000 35984 |
| R822 | 061L0805100 | CHIPR 10 OHM -5% 1/10W | 9965 000 36012 |
| R823 | 061L0805100 | CHIPR 10 OHM -5% 1/10W | 9965 000 36012 |
| R842 | 061L0805100 | CHIPR 10 OHM -5% 1/10W | 9965 000 36012 |
| R843 | 061L0805100 | CHIPR 10 OHM -5% 1/10W | 9965 000 36012 |
| R954 | 061L0805100 | CHIPR 10 OHM -5% 1/10W | 9965 000 36012 |
| R836 | 061L08051002F | CHIP 10K OHM 1/8W 1% | 9965 000 36020 |
| R855 | 061L08051002F | CHIP 10K OHM 1/8W 1% | 9965 000 36020 |
| R856 | 061L08051002F | CHIP 10K OHM 1/8W 1% | 9965 000 36020 |
| R835 | 061L08051002F | CHIP 10K OHM 1/8W 1% | 9965 000 36020 |
| R941 | 061L0805102 | CHIPR 1K OHM -5% 1/10W | 9965 000 36963 |
| R851 | 061L0805102 | CHIPR 1K OHM -5% 1/10W | 9965 000 36963 |
| R888 | 061L0805102 | CHIPR 1K OHM -5% 1/10W | 9965 000 36963 |
| R886 | 061L0805102 | CHIPR 1K OHM -5% 1/10W | 9965 000 36963 |
| R884 | 061L0805102 | CHIPR 1K OHM -5% 1/10W | 9965 000 36963 |
| R882 | 061L0805102 | CHIPR 1K OHM -5% 1/10W | 9965 000 36963 |
| R831 | 061L0805102 | CHIPR 1K OHM -5% 1/10W | 9965 000 36963 |
| R801 | 061L0805103 | CHIPR 10K OHM -5% 1/10W | 9965 000 36964 |
| R804 | 061L0805103 | CHIPR 10K OHM -5% 1/10W | 9965 000 36964 |
| R807 | 061L0805103 | CHIPR 10K OHM -5% 1/10W | 9965 000 36964 |
| R880 | 061L0805103 | CHIPR 10K OHM -5% 1/10W | 9965 000 36964 |
| R887 | 061L0805104 | CHIPR 100K OHM -5% 1/10W | 9965 000 36965 |
| R802 | 061L0805104 | CHIPR 100K OHM -5% 1/10W | 9965 000 36965 |
| R872 | 061L0805104 | CHIPR 100K OHM -5% 1/10W | 9965 000 36965 |
| R885 | 061L0805104 | CHIPR 100K OHM -5% 1/10W | 9965 000 36965 |
| R883 | 061L0805104 | CHIPR 100K OHM -5% 1/10W | 9965 000 36965 |
| R881 | 061L0805104 | CHIPR 100K OHM -5% 1/10W | 9965 000 36965 |
| R819 | 061L0805105 | CHIP 1M OHM 5% 1/8W | 9965 000 36013 |
| R912 | 061L0805105 | CHIP 1M OHM 5% 1/8W | 9965 000 36013 |
| R946 | 061L08051103F | 110KOHM 1% 1/10W | 9965 000 36966 |
| R853 | 061L0805122 | 1.2KOHM -5%,1/8W,0805 | 9965 000 36967 |
| R833 | 061L0805122 | 1.2KOHM -5%,1/8W,0805 | 9965 000 36967 |
| R923 | 061L0805123 | CHIP 12KOHM 1/8W | 9965 000 36968 |
| R914 | 061L08051241F | CHIP 1.24K OHM 1/10W 1% | 9965 000 36969 |
| R916 | 061L0805152 | CHIPR 1.5K OHM -5% 1/10W | 9965 000 36970 |
| R873 | 061L0805202 | CHIP 2KOHM 1/8W | 9965 000 36971 |
| R816 | 061L0805203 | CHIPR 20KOHM -5% 1/8W | 9965 000 36972 |
| R865 | 061L08052320F | CHIP 232OHM | 9965 000 36973 |

| | | | |
|------|---------------|---------------------------|----------------|
| R815 | 061L0805303 | CHIP 30K OHM 1/8W | 9965 000 36974 |
| R813 | 061L08053302F | CHIP 33KOHM 1/8W 1% | 9965 000 36975 |
| R874 | 061L0805331 | CHIP 330 OHM 5% 1/10W | 9965 000 36976 |
| R917 | 061L0805333 | CHIP 33KOHM 1% 1/8W | 9965 000 36977 |
| R811 | 061L0805335 | 3.3M 0805 | 9965 000 36978 |
| R943 | 061L08055101F | CHIP 5.1K OHM 1/10W 1% | 9965 000 36979 |
| R812 | 061L0805624 | CHIP 620KOHM 5% 0805 1/8W | 9965 000 36980 |
| R825 | 061L0805752 | CHIP 7.5K OHM 1/10W | 9965 000 36981 |
| R837 | 061L0805752 | CHIP 7.5K OHM 1/10W | 9965 000 36981 |
| R944 | 061L08059101F | CHIP 9.1K OHM 1/10W 1% | 9965 000 36982 |
| R945 | 061L08059101F | CHIP 9.1K OHM 1/10W 1% | 9965 000 36982 |
| R926 | 061L1206000 | CHIPR 0 OHM -5% 1/8W | 9965 000 36067 |
| R918 | 061L1206000 | CHIPR 0 OHM -5% 1/8W | 9965 000 36067 |
| R907 | 061L1206103 | CHIP 10KOHM 5% 1/4W | 9965 000 36016 |
| R904 | 061L1206155 | 1.5M/0805 | 9965 000 36983 |
| R910 | 061L1206155 | 1.5M/0805 | 9965 000 36983 |
| R937 | 061L1206182 | CHIP 1.8KOHM | 9965 000 36984 |
| R931 | 061L1206229 | CHIP 2.2OHM 5% 1/8W | 9965 000 36985 |
| R932 | 061L1206229 | CHIP 2.2OHM 5% 1/8W | 9965 000 36985 |
| R927 | 061L1206472 | CHIP 4.7KOHM 5% 1/4W | 9965 000 36986 |
| R902 | 061L1206684 | CHIPR 680K OHM -5% 1/8W | 9965 000 36024 |
| R901 | 061L1206684 | CHIPR 680K OHM -5% 1/8W | 9965 000 36024 |
| R900 | 061L1206684 | CHIPR 680K OHM -5% 1/8W | 9965 000 36024 |
| C838 | 065G080510231 | 1000PF 50V NPO | 9965 000 36991 |
| C861 | 065G080510231 | 1000PF 50V NPO | 9965 000 36991 |
| C822 | 065G080510232 | CHIP 1000P 50VX7R 0805 | 9965 000 36038 |
| C823 | 065G080510232 | CHIP 1000P 50VX7R 0805 | 9965 000 36038 |
| C842 | 065G080510232 | CHIP 1000P 50VX7R 0805 | 9965 000 36038 |
| C843 | 065G080510232 | CHIP 1000P 50VX7R 0805 | 9965 000 36038 |
| C887 | 065G080510322 | CHIP 0.01UF 25V X7R 0805 | 9965 000 36039 |
| C885 | 065G080510322 | CHIP 0.01UF 25V X7R 0805 | 9965 000 36039 |
| C883 | 065G080510322 | CHIP 0.01UF 25V X7R 0805 | 9965 000 36039 |
| C881 | 065G080510322 | CHIP 0.01UF 25V X7R 0805 | 9965 000 36039 |
| C819 | 065G080510322 | CHIP 0.01UF 25V X7R 0805 | 9965 000 36039 |
| C913 | 065G080510422 | 0.1UF -10% 25V X7R 080 | 9965 000 36040 |
| C955 | 065G080510422 | 0.1UF -10% 25V X7R 080 | 9965 000 36040 |
| C951 | 065G080510422 | 0.1UF -10% 25V X7R 080 | 9965 000 36040 |
| C812 | 065G080510422 | 0.1UF -10% 25V X7R 080 | 9965 000 36040 |
| C914 | 065G080510522 | CHIP 1UF 25V X7R 0805 | 9965 000 36073 |
| C841 | 065G080510522 | CHIP 1UF 25V X7R 0805 | 9965 000 36073 |
| C846 | 065G080510522 | CHIP 1UF 25V X7R 0805 | 9965 000 36073 |
| C874 | 065G080510522 | CHIP 1UF 25V X7R 0805 | 9965 000 36073 |
| C915 | 065G080512322 | CHIP 12NF 25V X7R 0805 | 9965 000 36992 |
| C860 | 065G080522122 | CHIP 220PF 25V X7R 0805 | 9965 000 36993 |
| C847 | 065G080522322 | CHIP 0.022UF 25V X7R 0805 | 9965 000 36043 |
| C831 | 065G080533132 | CHIP 330P 50V X7R 0805 | 9965 000 36994 |

| | | | |
|-------|----------------|--------------------------------|----------------|
| C865 | 065G080533332 | CHIP 0.033UF 50V | 9965 000 36995 |
| C917 | 065G080533422 | 0.33UF -10% 25V X7R 0805 | 9965 000 36074 |
| C858 | 065G080539131 | CHIP 390PF 50V | 9965 000 36996 |
| C813 | 065G080556131 | CHIP 560PF 50V NPO 0805 | 9965 000 36997 |
| C941 | 065G080556221 | 5600PF/25V/NPO/J | 9965 000 36998 |
| D851 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D831 | 093G6433 | DIO SIG SM BAV99 (PHSE)R | 9965 000 35994 |
| D833 | 093G6442PP | BAV70 SOT-23 | 9965 000 35995 |
| D883 | 093G6444S | LL4148WP | 9965 000 36035 |
| ZD874 | 093G39S24T | RLZ 5.6B LLDS | 9965 000 36079 |
| ZD975 | 093G39S25T | RLZ5.1B LLDS | 9965 000 37002 |
| R952 | 061G17210052T | 100HM 5% 1/4W | 9965 000 36987 |
| R915 | 061G17210052T | 100HM 5% 1/4W | 9965 000 36987 |
| R871 | 061G17210352T | CFR 10KOHM -5% 1/4W | 9965 000 36988 |
| R861 | 061G20010452T | 100K OHM 1/4W 1% | 9965 000 36989 |
| R863 | 061G20033352T | 33KOHM 1% 1/4W | 9965 000 36990 |
| R859 | 061G212Y625KT | MGFR 6.2MOHM -5% 1/2W | 9965 000 36083 |
| R839 | 061G212Y625KT | MGFR 6.2MOHM -5% 1/2W | 9965 000 36083 |
| C920 | 065G1K1025T | 1000PF/1KV | 9965 000 36999 |
| C931 | 065G517K3322T | 3.3NF 500V | 9965 000 37000 |
| C927 | 067G3056804KT | ELCAP 68UF M 25V 105Σ KINGNICH | 9965 000 37001 |
| C952 | 067G215B2214KT | LOW E,S,R 220UF -20% 25V | 9965 000 36076 |
| F902 | 084G554 | FOSE 382-5A 250V SICKMANN | 9965 000 37005 |
| F901 | 084G557GP | FUSE 3.15A 250V | 9965 000 37006 |
| FB901 | 071G5529 | FERRITE BEAD | 9965 000 36053 |
| ZD951 | 093G39A3552T | ZENER DIODE P6KE8.2A ZOWIE | 9965 000 37007 |
| D926 | 093G6038T52T | FR103 | 9965 000 36095 |
| D919 | 093G6038T52T | FR103 | 9965 000 36095 |

Key Board

| Location | Part No for TPV | Description | Philips 12NC |
|----------|-----------------|--------------------------------|----------------|
| | KEPC780KE7P | KEY BOARD | 9965 000 35900 |
| CN101 | 033G38026H | WAFER 6P RIGHT ANGLE PITCH 2.0 | 9965 000 35999 |
| SW1 | 077G6001GCJ | TACT SWITCH TSPB-2 -NP | 9965 000 36000 |
| SW2 | 077G6001GCJ | TACT SWITCH TSPB-2 -NP | 9965 000 36000 |
| SW3 | 077G6001GCJ | TACT SWITCH TSPB-2 -NP | 9965 000 36000 |
| SW4 | 077G6001GCJ | TACT SWITCH TSPB-2 -NP | 9965 000 36000 |
| SW5 | 077G6001GCJ | TACT SWITCH TSPB-2 -NP | 9965 000 36000 |
| SW6 | 077G6001GCJ | TACT SWITCH TSPB-2 -NP | 9965 000 36000 |
| SW7 | 077G6001GCJ | TACT SWITCH TSPB-2 -NP | 9965 000 36000 |
| SW8 | 077G6001GCJ | TACT SWITCH TSPB-2 -NP | 9965 000 36000 |
| LED1 | 081G121GP | GP32032ME | 9965 000 36001 |
| R109 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| R100 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| R101 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R104 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R108 | 061L0603102 | CHIPR 1K OHM -5% 1/16W | 9965 000 35970 |
| R103 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R107 | 061L0603103 | CHIPR 10K OHM -5% 1/16W | 9965 000 35971 |
| R106 | 061L0603473 | RST SM 0603 RC0603 47K PM5 R | 9965 000 36003 |
| R102 | 061L0603473 | RST SM 0603 RC0603 47K PM5 R | 9965 000 36003 |
| C101 | 065G060310332 | 0.01UF -10% 50V X7R | 9965 000 36004 |
| C102 | 065G060310332 | 0.01UF -10% 50V X7R | 9965 000 36004 |
| C103 | 065G060310332 | 0.01UF -10% 50V X7R | 9965 000 36004 |
| C104 | 065G060310332 | 0.01UF -10% 50V X7R | 9965 000 36004 |
| C105 | 065G060310332 | 0.01UF -10% 50V X7R | 9965 000 36004 |

16. Different Parts List

| Diversity of 170S7FS/27 compared with 170S7FS/00 | | | |
|--|------------------|----------------------------------|----------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| | 089G402A18NIS | POWER CORD | 9965 000 37563 |
| | 705GQ7K0P3403 | STAND-BASE ASS'Y | 9965 000 38101 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | 750GLQ70L0761M | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37087 |
| | CBPC780KGMP3P | CONVERSION BOARD ASS'Y | 9965 000 37416 |
| | CBPC780KQMP2P | CONVERSION BOARD | 9965 000 37564 |
| C431 | 067G305V1003 | 105 Σ 10UF -20% 16V | 9965 000 37413 |
| C707 | 067G305V1003 | 105 Σ 10UF -20% 16V | 9965 000 37413 |
| C708 | 067G305V1003 | 105 Σ 10UF -20% 16V | 9965 000 37413 |
| C426 | 067G305V2213P | 105 Σ 220UF M 16V | 9965 000 37414 |
| R411 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| R410 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB406 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB405 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB404 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB403 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| R441 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R440 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| ZD406 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD405 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB704 | 071G56K121M | CHIP BEAD | 9965 000 36567 |
| ZD406 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD405 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| L902 | 071G5524 | FERRITE BEAD | 9965 000 36947 |
| PT801 | 080GL19T8DN1 | X'FMR DARFONTK.2006M.101 | 9965 000 36093 |
| BD901 | 093G50460900 | BRIDGE DIODE GBU408 LITEON | 9965 000 37336 |
| D935 | 093G60240 | YG802C06R TO-220F15 | 9965 000 37337 |
| Q880 | 057G7592 | RK7002 | 9965 000 36033 |
| Q801 | 057G7592 | RK7002 | 9965 000 36033 |
| RJ801 | 061L0805000 | CHIPR 0OHM -5% 1/10W | 9965 000 35984 |
| RJ804 | 061L1206000 | CHIPR 0 OHM -5% 1/8W | 9965 000 36067 |
| C880 | 065G080510422 | 0.1UF -10% 25V X7R 080 | 9965 000 36040 |
| C832 | 065G080510422 | 0.1UF -10% 25V X7R 080 | 9965 000 36040 |
| C821 | 065G080510522 | CHIP 1UF 25V X7R 0805 | 9965 000 36073 |
| C811 | 065G080510522 | CHIP 1UF 25V X7R 0805 | 9965 000 36073 |
| C842 | 065G080522232 | CHIP 2200PF 25V X7R 0805 | 9965 000 37334 |
| C843 | 065G080522232 | CHIP 2200PF 25V X7R 0805 | 9965 000 37334 |
| C822 | 065G080522232 | CHIP 2200PF 25V X7R 0805 | 9965 000 37334 |

| | | | |
|-------|----------------|--------------------------|----------------|
| C823 | 065G080522232 | CHIP 2200PF 25V X7R 0805 | 9965 000 37334 |
| D853 | 093G6442PP | BAV70 SOT-23 | 9965 000 35995 |
| D881 | 093G6444S | LL4148WP | 9965 000 36035 |
| D887 | 093G6444S | LL4148WP | 9965 000 36035 |
| D885 | 093G6444S | LL4148WP | 9965 000 36035 |
| CN901 | 006G31500 | EYELET | 9965 000 36082 |
| T901 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| PT801 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| PT802 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| NR901 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| L901 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| C907 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| C956 | 067G215B2214KT | LOW E,S,R 220UF -20% 25V | 9965 000 36076 |
| C820 | 067G215B2214KT | LOW E,S,R 220UF -20% 25V | 9965 000 36076 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |
| FB902 | 071G5523S | BEAD | 9965 000 37004 |
| FB903 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FS/69 compared with 170S7FS/00 | | | |
|---|-------------------------|----------------------------------|---------------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| E089A | 089G410A18NIS | POWER CORD WALL-OUT FOR UK | 9965 000 37340 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P44G37901 | EPS | 9965 000 37018 |
| | P44G37902 | EPS | 9965 000 37019 |
| | P44G37908131A | CARTON | 9965 000 37021 |
| | P45G8860936 | PE BAG FOR MONITOR | 9965 000 35929 |
| | P85G7411 | SCALER SHIELDING | 9965 000 37022 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008131A | CD MANUAL | 9965 000 37024 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| | 750GLQ70L0761M | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37087 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FS/75 compared with 170S7FS/00 | | | |
|---|-------------------------|-----------------------------------|---------------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| | 050G6002 | HANDLE1 | 9965 000 35904 |
| | 050G6003 | HANDLE2 | 9965 000 35905 |
| | 089G412A18NIS3 | POWER CORD WALL-OUT FOR AUSTRALIA | 9965 000 37345 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P44G37901 | EPS | 9965 000 37018 |
| | P44G37902 | EPS | 9965 000 37019 |
| | P44G37908131A | CARTON | 9965 000 37021 |
| | P45G8860936 | PE BAG FOR MONITOR | 9965 000 35929 |
| | P85G7411 | SCALER SHIELDING | 9965 000 37022 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008131A | CD MANUAL | 9965 000 37024 |
| | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FS/93 compared with 170S7FS/00 | | | |
|---|-------------------------|----------------------------------|---------------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| E089A | 089G414A18NLS | POWER CORD | 9965 000 37089 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P34G1846VOB1T | BEZEL | 9965 000 37109 |
| | P45G8860936 | PE BAG FOR MONITOR | 9965 000 35929 |
| | Q44G70031 | EPS(R) | 9965 000 37091 |
| | Q44G70032 | EPS(L) | 9965 000 37092 |
| | Q44G70038131A | CARTON | 9965 000 37093 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008136A | CD MANUAL | 9965 000 37094 |
| | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FS/96 compared with 170S7FS/00 | | | |
|---|-------------------------|----------------------------------|---------------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| E089A | 089G410A18NIS | POWER CORD WALL-OUT FOR UK | 9965 000 37340 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P44G37901 | EPS | 9965 000 37018 |
| | P44G37902 | EPS | 9965 000 37019 |
| | P44G37908131A | CARTON | 9965 000 37021 |
| | P45G8860936 | PE BAG FOR MONITOR | 9965 000 35929 |
| | P85G7411 | SCALER SHIELDING | 9965 000 37022 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008131A | CD MANUAL | 9965 000 37024 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| | 750GLQ70L0761M | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37087 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FB/00 compared with 170S7FS/00 | | | |
|--|------------------|----------------------------------|----------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| | 045G88607 | PE BAG FOR MONITOR | 9965 000 36555 |
| | 050G6002 | HANDLE1 | 9965 000 35904 |
| | 050G6003 | HANDLE2 | 9965 000 35905 |
| E750L | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | P33G4989VQA1C | KEY PAD | 9965 000 37014 |
| | P34G1846VBA1T | BEZEL | 9965 000 37015 |
| | P37G5591VB | HINGE | 9965 000 37017 |
| | P44G37901 | EPS | 9965 000 37018 |
| | P44G37902 | EPS | 9965 000 37019 |
| | P44G37908131A | CARTON | 9965 000 37021 |
| | P85G7411 | SCALER SHIELDING | 9965 000 37022 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008131A | CD MANUAL | 9965 000 37024 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FB/69 compared with 170S7FS/00 | | | |
|--|------------------|----------------------------------|----------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| | 089G402A18NIS | POWER CORD | 9965 000 37563 |
| E750L | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | CBPC780KQMP2P | CONVERSION BOARD | 9965 000 37564 |
| | P34G1846VBA1T | BEZEL | 9965 000 37015 |
| | P37G5591VB | HINGE | 9965 000 37017 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP3P | CONVERSION BOARD ASS'Y | 9965 000 37416 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB704 | 071G56K121M | CHIP BEAD | 9965 000 36567 |
| ZD406 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD405 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| FB408 | 071G56K121M | CHIP BEAD | 9965 000 36567 |

| Diversity of 170S7FB/27 compared with 170S7FS/00 | | | |
|---|-------------------------|----------------------------------|---------------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| | 050G6002 | HANDLE1 | 9965 000 35904 |
| | 050G6003 | HANDLE2 | 9965 000 35905 |
| E089A | 089G410A18NLS | POWER CORD | 9965 000 37438 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P34G1846VBA1T | BEZEL | 9965 000 37015 |
| | P37G5591VB | HINGE | 9965 000 37017 |
| | P44G37901 | EPS | 9965 000 37018 |
| | P44G37902 | EPS | 9965 000 37019 |
| | P44G37908131A | CARTON | 9965 000 37021 |
| | 045G88607 | PE BAG FOR MONITOR | 9965 000 36555 |
| | P85G7411 | SCALER SHIELDING | 9965 000 37022 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008131A | CD MANUAL | 9965 000 37024 |
| | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FB/75 compared with 170S7FS/00 | | | |
|---|-------------------------|-----------------------------------|---------------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| E089A | 089G412A18NIS3 | POWER CORD WALL-OUT FOR AUSTRALIA | 9965 000 37345 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P34G1846VBA1T | BEZEL | 9965 000 37015 |
| | P37G5591VB | HINGE | 9965 000 37017 |
| | P44G37901 | EPS | 9965 000 37018 |
| | P44G37902 | EPS | 9965 000 37019 |
| | P44G37908131A | CARTON | 9965 000 37021 |
| | 045G88607 | PE BAG FOR MONITOR | 9965 000 36555 |
| | P85G7411 | SCALER SHIELDING | 9965 000 37022 |
| | Q40G17N8131B | RATING LABEL | 9965 000 37011 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008131A | CD MANUAL | 9965 000 37024 |
| | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FB/93 compared with 170S7FS/00 | | | |
|--|------------------|----------------------------------|----------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| | 045G88607 | PE BAG FOR MONITOR | 9965 000 36555 |
| E089A | 089G414A18NLS | POWER CORD | 9965 000 37089 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P33G4989VQA1C | KEY PAD | 9965 000 37014 |
| | P34G1846VBB1T | BEZEL | 9965 000 37090 |
| | P37G5591VB | HINGE | 9965 000 37017 |
| | Q44G70031 | EPS(R) | 9965 000 37091 |
| | Q44G70032 | EPS(L) | 9965 000 37092 |
| | Q44G70038131A | CARTON | 9965 000 37093 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008136A | CD MANUAL | 9965 000 37094 |
| | 750GLQ70L0761M | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37087 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FB/96 compared with 170S7FS/00 | | | |
|--|------------------|----------------------------------|----------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| E089A | 089G420A18NIS | POWER CORD | 9965 000 37565 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P34G1846VBA1T | BEZEL | 9965 000 37015 |
| | P37G5591VB | HINGE | 9965 000 37017 |
| | P85G7411 | SCALER SHIELDING | 9965 000 37022 |
| | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |

| Diversity of 170S7FG/27 compared with 170S7FS/00 | | | |
|--|------------------|----------------------------------|----------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| E089B | 089G728GAC550 | SIGNAL CABLE D-SUB GREATLAND | 9965 000 36556 |
| | 089G402E18NIS | POWER CORD | 9965 000 36576 |
| | 705GQ7K0P3401 | STAND-BASE | 9965 000 38100 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | 750GLQ70L076M0 | PANEL LCD 17" EL07 R11 PHILIPS Q | 9965 000 37009 |
| | CBPC780KGMP3P | CONVERSION BOARD ASS'Y | 9965 000 37416 |
| | CBPC780KQMP2P | CONVERSION BOARD | 9965 000 37564 |
| | P33G4972VC1L | COVER_HINGE | 9965 000 36562 |
| | P33G4989VVA1C | KEY PAD | 9965 000 37441 |
| | P34G1846VCA1T | BEZEL | 9965 000 37499 |
| | P34G1850VC1T | REAR_COVER | 9965 000 37443 |
| C431 | 067G305V1003 | 105Σ 10UF -20% 16V | 9965 000 37413 |
| C707 | 067G305V1003 | 105Σ 10UF -20% 16V | 9965 000 37413 |
| C708 | 067G305V1003 | 105Σ 10UF -20% 16V | 9965 000 37413 |
| C426 | 067G305V2213P | 105Σ 220UF M 16V | 9965 000 37414 |
| R411 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| R410 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB406 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB405 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB404 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB403 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| R441 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| R440 | 061L0603101 | CHIPR 100 OHM -5% 1/16W | 9965 000 35969 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| ZD406 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| ZD405 | 093G39S34T | UDZS5.6B | 9965 000 35996 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| FB704 | 071G56K121M | CHIP BEAD | 9965 000 36567 |
| L902 | 071G5524 | FERRITE BEAD | 9965 000 36947 |
| PT801 | 080GL19T8DN1 | X'FMR DARFONTK.2006M.101 | 9965 000 36093 |
| BD901 | 093G50460900 | BRIDGE DIODE GBU408 LITEON | 9965 000 37336 |
| D935 | 093G60240 | YG802C06R TO-220F15 | 9965 000 37337 |
| Q880 | 057G7592 | RK7002 | 9965 000 36033 |
| Q801 | 057G7592 | RK7002 | 9965 000 36033 |
| RJ801 | 061L0805000 | CHIPR 0OHM -5% 1/10W | 9965 000 35984 |
| RJ804 | 061L1206000 | CHIPR 0 OHM -5% 1/8W | 9965 000 36067 |
| C880 | 065G080510422 | 0.1UF -10% 25V X7R 080 | 9965 000 36040 |
| C832 | 065G080510422 | 0.1UF -10% 25V X7R 080 | 9965 000 36040 |
| C821 | 065G080510522 | CHIP 1UF 25V X7R 0805 | 9965 000 36073 |
| C811 | 065G080510522 | CHIP 1UF 25V X7R 0805 | 9965 000 36073 |
| C842 | 065G080522232 | CHIP 2200PF 25V X7R 0805 | 9965 000 37334 |

| | | | |
|-------|----------------|--------------------------|----------------|
| C843 | 065G080522232 | CHIP 2200PF 25V X7R 0805 | 9965 000 37334 |
| C822 | 065G080522232 | CHIP 2200PF 25V X7R 0805 | 9965 000 37334 |
| C823 | 065G080522232 | CHIP 2200PF 25V X7R 0805 | 9965 000 37334 |
| D853 | 093G6442PP | BAV70 SOT-23 | 9965 000 35995 |
| D881 | 093G6444S | LL4148WP | 9965 000 36035 |
| D887 | 093G6444S | LL4148WP | 9965 000 36035 |
| D885 | 093G6444S | LL4148WP | 9965 000 36035 |
| CN901 | 006G31500 | EYELET | 9965 000 36082 |
| T901 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| PT801 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| PT802 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| NR901 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| L901 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| C907 | 006G31502 | 1.5MM RIVET | 9965 000 36046 |
| C956 | 067G215B2214KT | LOW E,S,R 220UF -20% 25V | 9965 000 36076 |
| C820 | 067G215B2214KT | LOW E,S,R 220UF -20% 25V | 9965 000 36076 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |
| FB902 | 071G5523S | BEAD | 9965 000 37004 |
| FB903 | 071G5523S | BEAD | 9965 000 37004 |

| Diversity of 170S7FG/93 compared with 170S7FS/00 | | | |
|--|------------------|----------------------------------|----------------|
| Location | Part No. for TPV | Description | Philips 12NC |
| | 045G88607 | PE BAG FOR MONITOR | 9965 000 36555 |
| E089B | 089G728GAC550 | SIGNAL CABLE D-SUB GREATLAND | 9965 000 36556 |
| E089A | 089G414E18NIS | POWER CORD I-SHENG | 9965 000 37440 |
| | 750GLG70E1B11M | PANEL LCD 17" E01 TLBB PHILIPS L | 9965 000 37088 |
| | CBPC780KGMP2P | CONVERSION BOARD | 9965 000 37085 |
| | P33G4972VC1L | COVER_HINGE | 9965 000 36562 |
| | P33G4989VVA1C | KEY PAD | 9965 000 37441 |
| | P34G1846VCB1T | BEZEL | 9965 000 37442 |
| | P34G1850VC1T | REAR_COVER | 9965 000 37443 |
| | P37G5591VC | HINGE | 9965 000 37445 |
| | P85G7411 | SCALER SHIELDING | 9965 000 37022 |
| | Q44G70031 | EPS(R) | 9965 000 37091 |
| | Q44G70032 | EPS(L) | 9965 000 37092 |
| | Q44G70038131A | CARTON | 9965 000 37093 |
| | Q45G7628A04 | PHILIPS PE BAG | 9965 000 35940 |
| | Q70G17008136A | CD MANUAL | 9965 000 37094 |
| | 750GLQ70L076Z0 | PANEL LCD 17" EL07 R11 ZBD PHILI | 9965 000 37446 |
| | CBPC780KQMP1P | CONVERSION BOARD | 9965 000 37086 |
| FB402 | 061L0603000 | RST SM 0603 JUMP MAX 0R05 R | 9965 000 36002 |
| C429 | 065G040210031T | MLCC 0402 10UF J 50V NPO TAIYO Y | 9965 000 36566 |
| FB905 | 071G5523S | BEAD | 9965 000 37004 |

17. General Product Specification

- 1 FOREWORD
- 2 PRODUCT PROFILE
 - 2.1 LCD
 - 2.2 SCANNING FREQUENCIES
 - 2.3 AMBIENT TEMPERATURE
 - 2.4 REGULATORY COMPLIANCE
- 3 ELECTRICAL CHARACTERISTICS
 - 3.1 INTERFACE SIGNALS
 - 3.2 INTERFACE
 - 3.3 TIMING REQUIREMENT
 - 3.4 HORIZONTAL SCANNING
 - 3.5 VERTICAL SCANNING
 - 3.6 POWER INPUT CONNECTION
 - 3.7 POWER MANAGEMENT
 - 3.8 DISPLAY IDENTIFICATION
 - 3.9 USB HUB
 - 4 VISUAL CHARACTERISTICS
 - 4.1 TEST CONDITIONS
 - 4.2 BRIGHTNESS
 - 4.3 IMAGE SIZE
 - 4.4 BRIGHTNESS UNIFORMITY
 - 4.5 CHECK CROSS TALK (S)³
 - 4.6 WHITE COLOR ADJUSTMENT
- 5 MECHANICAL CHARACTERISTICS
 - 5.1 CONTROLS
 - 5.2 UNIT DIMENSION / WEIGHT
 - 5.3 TILT AND SWIVEL BASE
 - 5.4 TRANSPORTATION PACKAGES
- 6 ENVIRONMENTAL CHARACTERISTICS
 - 6.1 SUSCEPTIBILITY OF DISPLAY TO EXTERNAL ENVIRONMENT
 - 6.2 TRANSPORTATION TESTS
 - 6.3 DISPLAY DISTURBANCES FROM EXTERNAL ENVIRONMENT
 - 6.4 DISPLAY DISTURBANCES TO EXTERNAL ENVIRONMENT
- 7 RELIABILITY
 - 7.1 MEAN TIME BETWEEN FAILURES
- 8 QUALITY ASSURANCE REQUIREMENTS
 - 8.1 ACCEPTANCE TEST
- 9 SERVICEABILITY
- 10 PHILIPS' FLAT PANEL MONITORS PIXEL DEFECT POLICY

- . ANALOG D-SUB INPUT
- . AUTO PICTURE ADJUSTMENT
- . 17 FACTORY PRESET MODES AND 33 PRESET MODES WHICH CAN BE RECOVERED TO PRESET MODES
- . USER FRIENDLY OSD DISPLAY FOR MODE IDENTIFICATION /ADJUSTMENT
- . MAX. RESOLUTION 1280*1024 NON-INTERLACED AT 75 HZ
- . 17" COLOR TFT LCD FLAT PANEL
- . EASY TILT & FOLDABLE BASE
- . FULL RANGE POWER SUPPLY 90 – 264 VAC
- . CE ENVIRONMENTAL POLICY
- . ANTI-GLARE TO REDUCE LIGHT REFLECTION
- . SMART MANAGEMENT AND SMART CONTROL REQUIREMENT
- . POWER MANAGEMENT CAPABILITY
- . SOG SUPPORT
- . TCO 03
- . RoHS required
- . WEEE required

FOREWORD

This specification describes a 17" wide SXGA multi-scan color TFT LCD monitor with max. resolution up to 1280*1024/ 75 Hz non-interlaced. All optical characteristics (including WHITE-D, Brightness, and so on) are determined according to panel specification after warming up approximate 30 minutes that brightness stability is optimal, and follow strictly after panel specification.

1. PRODUCT PROFILE

This display monitor unit is a color display monitor enclosed in PHILIPS global styling cabinet, which has an integrated foldable base.

1.1 LCD

| | |
|--------------------------|---|
| Type NR. | : LM170E01-TLBB/TLBD , |
| Outside dimensions | : 358.5(w)*296.5(h)*17.0(d) (Typ) mm |
| Pitch (mm) | : 0.264 x 0.264mm |
| Color pixel arrangement: | RGB vertical stripes |
| Display surface | : low reflection, antiglare with hard coating |
| Color depth | : 16M colors (8 bits) |
| Backlight | : 4 CCFL's |
| Active area(WxH) | : 17" diagonal |
| View angle | : Horizontal $\pm 70^\circ$, Vertical $+75^\circ, -65^\circ$ (CR>10) |
| Contrast ratio | : 700:1(Typ.) 500:1(Min.) |
| White luminance | : Original color 250 nits (Min), 300 nits (Typ.) |
| Gate IC | : Toshiba (TLBB , TLBD) |
| Source IC | : SS (TLBB) , NEC (TLBD) |
| Response time | : 8ms |

| | |
|---------------------------|---|
| Type NR. | : QD17EL07-Rev11 |
| Outside dimensions | : 358.5(w)*296.5(h)*17.0(d)(Max)mm |
| Pitch (mm) | : 0.264 x 0.264mm |
| Color pixel arrangement : | RGB vertical stripes |
| Display surface | : low reflection, antiglare with hard coating |
| Color depth | : 16M colors (8 bits) |
| Backlight | : 4 CCFL's |
| Active area(WxH) | : 17" diagonal |
| View angle | : Horizontal $\pm 70^\circ$, Vertical $+65^\circ, -60^\circ$ (CR>10) |
| Contrast ratio | : 600:1(Typ.) 400:1(Min.) |
| White luminance | : Original color 220nits (Min), 270nits (Typ.) |
| Gate IC | : Novatek NT39328 , Sunplus SPLC1698A |
| Source IC | : Novatek NT39604, Sunplus SPFD6464A |
| Response time | : 8ms |

1.2 Scanning frequencies

| | |
|-------------------|---------------------------------|
| Hor. | : 30 – 83 KHz |
| Ver. | : 56 - 76Hz |
| Video dot rate | : 140MHz |
| Power input | : 90-264 V AC, 50/60 \pm 2 Hz |
| Power consumption | : 36W (max.), 30W (typ.) |

Functions :

- (1) D-SUB: analog R/G/B separate inputs, H/V sync separated, Composite (H+V) TTL level, SOG sync
- (2) DVI_A: NA
- (3) DVI_D: NA

1.3 Ambient temperature : 0 °C - 35 °C

2. Electrical characteristics

2.1 Interface signals

The input signals can be applied in three different modes :

1). D-Sub Analog

Input signal : Video, Hsync., Vsync

Video : 0.7 Vp-p, input impedance, 75 ohm @DC

Sync. : Separate sync TTL level , input impedance 2.2k ohm terminate

Hsync Positive/Negative

Vsync Positive/Negative

Composite sync TTL level, input impedance 5k ohm terminate (Positive/Negative)

Sync on green video 0.3 Vp-p Negative (Video 0.7 Vp-p Positive)

2). Intel DVI Digital

NA

2.2 Interface

2.2.1 D-Sub Cable

Length : 1.8 M +/- 50mm (fixed)
 Connector type : D-Sub male with DDC2B pin assignments.
 Blue connector thumb-operated jack screws

pin assignment :

| PIN No. | SIGNAL |
|---------|---------------------|
| 1 | Red |
| 2 | Green/ SOG |
| 3 | Blue |
| 4 | Sense (GND) |
| 5 | Cable Detect |
| 6 | Red GND |
| 7 | Green GND |
| 8 | Blue GND |
| 9 | DDC +5V |
| 10 | GND |
| 11 | Sense (GND) |
| 12 | Bi-directional data |
| 13 | H/H+V sync |
| 14 | V-sync |
| 15 | Data clock |

2.2.2 DVI Cable

NA

2.2.3 Software control functions via OSD/control adjustable functions:

(1) PC Analog only Signal Input Mode

Adjustable functions:

| 1 st LEVEL | 2 nd LEVEL | 3rd LEVEL |
|---|---|---|
| MONITOR SETUP | | |
| Exit | | |
| Brightness & Contrast | Brightness Contrast | |
| Color | Original Color, 9300K,6500K, sRGB, User Define | |
| Position | Horizontal | |
| | Vertical | |
| More Settings | Language | /00 : English, Espanol, Frencais, Deutsch, Italiano, , Russian |
| | | /27 : English, Espanol, Frencais, Portuguess, S-Chinese |
| | | <u>/69,/75,/93,/96 : English, Espanol, Frencais, Deutsch, Italiano, , S-Chinese</u> |
| | Phase/ Clock | Phase |
| | | Clock |
| | OSD Settings | Horizontal Vertical |
| Reset | No Yes | |
| Serial No.: | | |
| (Serial No.) | | |
| Timing Mode | | |
| Up/Down to Move, <input type="checkbox"/> to Confirm | | |

Remark : < to Adjust > ----- < to Move > - < to Confirm >

Remark : Color Temperature factory default setting = see 170S7 SKU.

Remark: Language default to English, and Language couldn't be reset.

(2) Digital interface OSD :

NA

2.3 Timing requirement

2.3.1 Mode storing capacity

Factory preset modes : 17

Preset modes : 33

2.3.2 Factory preset timings

| Item | H.Freq. (KHz) | Mode | Resolution | V.Freq. (Hz) | Item | H.Freq. (KHz) | Mode | Resolution | V.Freq. (Hz) |
|------|---------------|------|------------|--------------|------|---------------|-----------|------------|--------------|
| 1 | 31.469 | DOS | 720x400 | 70.087 | 11 | 60.023 | VESA | 1024x768 | 75.029 |
| 2 | 31.469 | VESA | 640x480 | 59.940 | 12 | 67.500 | VESA | 1152x864 | 75.000 |
| 3 | 37.861 | VESA | 640x480 | 72.809 | 13 | 60.000 | VESA | 1280x960 | 60.000 |
| 4 | 37.500 | VESA | 640x480 | 75.000 | 14 | 63.981 | VESA | 1280x1024 | 60.020 |
| 5 | 35.156 | VESA | 800x600 | 56.250 | 15 | 79.976 | VESA | 1280x1024 | 75.025 |
| 6 | 37.879 | VESA | 800x600 | 60.317 | 16 | 35.000 | MACINTOSH | 640x480 | 67.000 |
| 7 | 48.077 | VESA | 800x600 | 72.188 | 17 | 49.700 | MACINTOSH | 832x624 | 75.000 |
| 8 | 46.875 | VESA | 800x600 | 75.000 | 18 | | | | |
| 9 | 48.363 | VESA | 1024x768 | 60.004 | 19 | | | | |
| 10 | 56.476 | VESA | 1024x768 | 70.069 | 20 | | | | |

2.3.3 Preset Modes

| MODE NO. | 1 | 2 | 3 | 4 |
|--------------------|------------------|------------------|--------------------|-------------------|
| RESOLUTION | 640 x 350 | 720 x 400 | 640 x 480 | 640 x 480 |
| Dot clock(MHz) | 25.175 | 28.321 | 25.175 | 30.24 |
| f h | 31.469kHz | 31.468kHz | 31.5kHz | 35 kHz |
| A (us) | 31.778(800 dots) | 31.78(900dots) | 31.778(800 dots) | 28.571 (864 dots) |
| B (us) | 3.813(96 dots) | 3.813(108dots) | 3.813(96 dots) | 2.116 (64 dots) |
| C (us) | 1.907(48 dots) | 1.907(54dots) | 1.907(48 dots) | 3.175(96 dots) |
| D (us) | 25.422(640 dots) | 25.42(720dots) | 25.422(640 dots) | 21.164(640 dots) |
| E (us) | 0.636(16 dots) | 0.636(18dots) | 0.636(16 dots) | 2.116(64 dots) |
| f v | 70Hz(70.09) | 70Hz(70.085) | 60Hz | 67Hz |
| O (ms) | 14.27(449 lines) | 14.27(449 lines) | 16.683 (525 lines) | 15 (525 lines) |
| P (ms) | 0.064(2 lines) | 0.064(2 lines) | 0.064 (2 lines) | 0.086(3 lines) |
| Q (ms) | 1.907(60 lines) | 1.080(34 lines) | 1.049 (33 lines) | 1.114(39 lines) |
| R (ms) | 11.12(350 lines) | 12.71(400 lines) | 15.253 (480 lines) | 13.714(480 lines) |
| S (ms) | 1.175(37 lines) | 0.381(13 lines) | 0.317 (10 line) | 0.086(3 line) |
| SYNC. H/V POLARITY | +/- | -/+ | -/- | -/- |
| SEP. SYNC | Y | Y | Y | Y |

| MODE NO. | 5 | 6 | 7 | 8 |
|-----------------------|-------------------|--------------------|--------------------|--------------------|
| RESOLUTION | 640 x 480 | 640 x 480 | 640x480 | 800 x 600 |
| Dot clock(MHz) | 31.500 | 31.501 | 36 | 36 |
| f h | 37.861kHz | 37.5kHz | 36kHz | 35.2kHz |
| A (us) | 26.413(832 dots) | 26.667 (840 dots) | 23.111 (832 dots) | 28.444(1024 dots) |
| B (us) | 1.270(40 dots) | 2.032 (54 dots) | 1.556 (56 dots) | 2.000 (72 dots) |
| C (us) | 3.810(120 dots) | 3.81 (120 dots) | 2.222 (80 dots) | 3.556 (128 dots) |
| D (us) | 20.317(640 dots) | 20.317 (640 dots) | 17.778 (640 dots) | 22.222(800 dots) |
| E (us) | 1.016(32 dots) | 0.508 (26 dots) | 1.555 (56 dots) | 0.666 (24 dots) |
| f v | 72.809Hz | 75Hz | 85Hz | 56Hz |
| O (ms) | 13.735(520 lines) | 13.333 (500 lines) | 11.763 (509 lines) | 17.778 (625 lines) |
| P (ms) | 0.079(3 lines) | 0.08 (3 lines) | 0.069 (3 lines) | 0.057 (2 lines) |
| Q (ms) | 0.528(20 lines) | 0.427 (16 lines) | 0.578 (25 lines) | 0.626 (22 lines) |
| R (ms) | 12.678(480 lines) | 12.8 (480 lines) | 11.093 (480 lines) | 17.066 (600 lines) |
| S (ms) | 0.45(17 lines) | 0.026 (1 lines) | 0.023 (1 lines) | 0.029 (1 line) |
| SYNC. H/V POLARITY | -/- | - / - | -/- | + / + |
| SEP . SYNC | Y | Y | Y | Y |

| MODE NO. | 9 | 10 | 11 | 12 |
|-----------------------|--------------------|-------------------|--------------------|--------------------|
| RESOLUTION | 800 x 600 | 800 x 600 | 800 x 600 | 800 x 600 |
| Dot clock(MHz) | 40 | 50 | 49.498 | 56.251 |
| f h | 37.9kHz | 48.077kHz | 46.9kHz | 53.7kHz |
| A (us) | 26.4 (1056 dots) | 20.80 (1040dots) | 21.333(1056 dots) | 18.631 1048 dots) |
| B (us) | 3.2 (128 dots) | 2.400 (120 dots) | 1.616 (80 dots) | 1.138 (64 dots) |
| C (us) | 2.2 (88 dots) | 1.280 (64 dots) | 3.232 (160 dots) | 2.702 (152 dots) |
| D (us) | 20 (800 dots) | 16.00 (800 dots) | 16.162 (800 dots) | 14.222 (800 dots) |
| E (us) | 1 (40 dots) | 1.120 (56 dots) | 0.323 (16 dots) | 0.569 (32 dots) |
| f v | 60Hz | 72Hz (72.188) | 75Hz | 85Hz |
| O (ms) | 16.579 (628 lines) | 13.85 (666 lines) | 13.333 (625 lines) | 11.756(631 lines) |
| P (ms) | 0.106 (4 lines) | 0.125 (6 lines) | 0.064 (3 lines) | 0.056 (3 lines) |
| Q (ms) | 0.607 (23 lines) | 0.478 (23 lines) | 0.448 (21 lines) | 0.503 (27 lines) |
| R (ms) | 15.84 (600lines) | 12.48 (600 lines) | 12.8 (600 lines) | 11.179 (600 lines) |
| S (ms) | 0.026 (1 line) | 0.770 (37 line) | 0.021 (1 line) | 0.018 (1 lines) |
| SYNC. H/V POLARITY | + / + | + / + | + / + | + / + |
| SEP . SYNC | Y | Y | Y | Y |

| MODE NO. | 13 | 14 | 15 | 16 |
|-----------------------|------------------|-------------------|-------------------|--------------------|
| RESOLUTION | 832 x 624 | 1024 x 768 | 1024 x 768 | 1024 x 768 |
| Dot clock(MHz) | 57.28 | 65 | 75 | 78.75 |
| f h | 49.7kHz | 48.363kHz | 56.5kHz | 60kHz |
| A (us) | 20.11(1152 dots) | 20.677(1344 dots) | 17.707(1328 dots) | 16.66 (1312dots) |
| B (us) | 1.117(64 dots) | 2.092(136 dots) | 1.813(136 dots) | 1.219 (96 dots) |
| C (us) | 3.91(224 dots) | 2.462(160 dots) | 1.920(144 dots) | 2.235 (176 dots) |
| D (us) | 14.52(832 dots) | 15.754(1024 dots) | 13.653(1024 dots) | 13.003(1024 dots) |
| E (us) | 0.563(32 dots) | 0.369(24 dots) | 0.321 (24 dots) | 0.203 (16 dots) |
| f v | 75Hz | 60.004Hz | 70.004Hz | 75Hz (75.000) |
| O (ms) | 13.41(667 lines) | 16.666(806 lines) | 14.272(806 lines) | 13.328 (800 lines) |
| P (ms) | 0.06(3 lines) | 0.124(6 lines) | 0.106(6 lines) | 0.05(3 lines) |
| Q (ms) | 0.784(39 lines) | 0.600(29 lines) | 0.514(29 lines) | 0.446 (28 lines) |
| R (ms) | 12.55(624 lines) | 15.880(768 lines) | 13.599(768 lines) | 12.80 (768 lines) |
| S (ms) | 0.016(1 lines) | 0.062(3 lines) | 0.053(3 lines) | 0.017 (1 line) |
| SYNC. H/V POLARITY | +/+ | - / - | -/- | + / + |
| SEP . SYNC | Y | Y | Y | Y |

| MODE NO. | 17 | 18 | 19 | 20 |
|-----------------------|--------------------|--------------------|-------------------|-------------------|
| RESOLUTION | 1024 x 768 | 1024 x 768 | 1152 x 864 | 1152 x 864 |
| Dot clock(MHz) | 83.096 | 94.5 | 79.9 | 94.5 |
| f h | 61.1kHz | 68.7kHz | 54.0kHz | 63.9kHz |
| A (us) | 16.367 (1360dots) | 14.561(1376 dots) | 18.523(1480 dots) | 15.661(1480 dots) |
| B (us) | 1.348 (112 dots) | 1.016 (96 dots) | 1.952(156 dots) | 1.016(96 dots) |
| C (us) | 2.022 (168 dots) | 2.201 (208 dots) | 1.352(108 dots) | 1.116(105 dots) |
| D (us) | 12.323(1024 dots) | 10.836(1024 dots) | 14.418(1152 dots) | 12.19(1152 dots) |
| E (us) | 0.674 (56 dots) | 0.508 (48 dots) | 0.801(64 dots) | 1.339(127 dots) |
| f v | 76Hz | 85Hz | 60Hz | 70Hz |
| O (ms) | 13.142 (803 lines) | 11.765 (808 lines) | 16.671(900lines) | 14.283(912lines) |
| P (ms) | 0.049 (3 lines) | 0.044 (3 lines) | 0.148(8 lines) | 0.047(3lines) |
| Q (ms) | 0.507 (31 lines) | 0.524 (36 lines) | 0.445(24 lines) | 0.689(44 lines) |
| R (ms) | 12.57 (768 lines) | 11.183 (768lines) | 16.004(864 lines) | 13.531(864 lines) |
| S (ms) | 0.016 (1 line) | 0.014 (1 line) | 0.074(4 lines) | 0.016(1 lines) |
| SYNC. H/V POLARITY | + / + | + / + | + / + | + / + |
| SEP . SYNC | Y | Y | Y | Y |

| MODE NO. | 21 | 22 | 23 | 24 |
|-----------------------|--------------------|--------------------|--------------------|--------------------|
| RESOLUTION | 1152 x 864 | 1152 x 870 | 1152 x 900 | 1152 x 900 |
| Dot clock(MHz) | 108 | 100 | 94.5 | 108 |
| f h | 67.5kHz | 68.7kHz | 61.8kHz | 71.8kHz |
| A (us) | 14.815(1600 dots) | 14.56 (1456 dots) | 16.169(1528 dots) | 13.926 (1054dots) |
| B (us) | 1.185 (128 dots) | 1.28 (128 dots) | 1.354 (128 dots) | 1.185 (128 dots) |
| C (us) | 2.37 (256 dots) | 1.44(144 dots) | 2.201 (208 dots) | 1.778 (192 dots) |
| D (us) | 10.667 (1152 dots) | 11.52 (1152 dots) | 12.19 (1152 dots) | 10.667(1152 dots) |
| E (us) | 0.593 (64 dots) | 0.32 (32 dots) | 0.424 (40 dots) | 0.296 (32 dots) |
| f v | 75Hz | 75Hz | 66Hz | 76Hz |
| O (ms) | 13.333 (900 lines) | 13.333 (916 lines) | 15.151 (937lines) | 13.132 (943 lines) |
| P (ms) | 0.044 (3 lines) | 0.044 (3 lines) | 0.065 (4 lines) | 0.111 (8 lines) |
| Q (ms) | 0.474 (32 lines) | 0.568(39 lines) | 0.501 (31 lines) | 0.46 (33 lines) |
| R (ms) | 12.8 (864 lines) | 12.678 (870 lines) | 14.552 (900lines) | 12.533 (900 lines) |
| S (ms) | 0.015 (1 lines) | 0.043 (4 line) | 0.033 (2 line) | 0.028 (2 lines) |
| SYNC. H/V POLARITY | - / - | - / - | Serr- | + / + |
| SEP. SYNC | Y | Y | Y | Y |

| MODE NO. | 25 | 26 | 27 | 28 |
|-----------------------|--------------------|--------------------|--------------------|--------------------|
| RESOLUTION | 1280 x 960 | 1280 x 960 | 1280 x 1024 | 1280 x 1024 |
| Dot clock(MHz) | 108 | 129.895 | 108 | 117 |
| f h | 60kHz | 75kHz | 64kHz | 71.7kHz |
| A (us) | 16.667(1800 dots) | 13.307(1728 dots) | 15.63 (1688 dots) | 13.949(1632 dots) |
| B (us) | 1.037(112 dots) | 1.047 (136 dots) | 1.037 (112 dots) | 0.957 (112 dots) |
| C (us) | 2.889(312 dots) | 1.725 (224 dots) | 2.296 (248 dots) | 1.915 (224 dots) |
| D (us) | 11.852(1280 dots) | 9.857 (1280 dots) | 11.852 (1280 dots) | 10.94 (1280 dots) |
| E (us) | 0.889(96 dots) | 0.678 (88 dots) | 0.445 (48 dots) | 0.137 (16 dots) |
| f v | 60Hz | 75Hz | 60Hz | 67Hz |
| O (ms) | 16.667(1000 lines) | 13.333(1002 lines) | 16.661(1066 lines) | 14.883 (1067lines) |
| P (ms) | 0.05(3 lines) | 0.039 (3 lines) | 0.047 (3 lines) | 0.112 (8 lines) |
| Q (ms) | 0.600(36 lines) | 0.48 (36 lines) | 0.594 (38 lines) | 0.46 (33 lines) |
| R (ms) | 16(960 lines) | 12.774 (960 lines) | 16.005(1024 lines) | 14.283(1024 lines) |
| S (ms) | 0.017(1 lines) | 0.04 (3 lines) | 0.015 (1 line) | 0.028 (2 lines) |
| SYNC. H/V POLARITY | +/+ | + / + | + / + | + / + |
| SEP. SYNC | Y | Y | Y | Y |

| MODE NO. | 29 | 30 | 31 | 32 |
|-----------------------|--------------------|--------------------|--------------------|-------------------|
| RESOLUTION | 1280 x 1024 | 1280 x 1024 | 1280 x 1024 | 960x720 |
| Dot clock(MHz) | 130.223 | 135 | 138.008 | 57.58 |
| F h | 76kHz | 80kHz | 81.1kHz | 44.76kHz |
| A (us) | 13.158(1712 dots) | 12.504(1688 dots) | 12.326(1664 dots) | 22.34(1286 dots) |
| B (us) | 1.024 (133 dots) | 1.067(144 dots) | 0.474 (64 dots) | 1.72(99 dots) |
| C (us) | 1.905 (248 dots) | 1.837(248 dots) | 2.133 (288 dots) | 2.58(148 dots) |
| D (us) | 9.83 (1280 dots) | 9.481(1280 dots) | 9.481 (1280 dots) | 16.67(960 dots) |
| E (us) | 0.399(51 dots) | 0.119(16 dots) | 0.238 (32 dots) | 0.856(49 dots) |
| F v | 72Hz | 75Hz | 76Hz | 60Hz |
| O (ms) | 14 (1064 lines) | 13.329(1066 lines) | 13.139(1066 lines) | 16.667(746 lines) |
| P (ms) | 0.02 (2 lines) | 0.038(3 lines) | 0.099 (8 lines) | 0.067(2.9 lines) |
| Q (ms) | 0.5 (38 lines) | 0.475(38 lines) | 0.394 (32 lines) | 0.495(22 lines) |
| R (ms) | 13.468(1024 lines) | 12.804(1024 lines) | 12.622(1024 lines) | 16.081(720 lines) |
| S (ms) | 0.012 (0 line) | 0.012 (1 line) | 0.024(2 lines) | 0.0228(1 lines) |
| SYNC. H/V POLARITY | + / + | +/+ | - / - | -/+ |
| SEP . SYNC | Y | Y | Y | Y |

| MODE NO. | 33 |
|-----------------------|-------------------|
| RESOLUTION | 960X720 |
| Dot clock(MHz) | 72.42 |
| F h | 56.4kHz |
| A (us) | 17.73(1284 dots) |
| B (us) | 1.44(104 dots) |
| C (us) | 2.21(160 dots) |
| D (us) | 13.256(960 dots) |
| E (us) | 0.780(56 dots) |
| F v | 75Hz |
| O (ms) | 13.333(752 lines) |
| P (ms) | 0.053(3 lines) |
| Q (ms) | 0.5(28 lines) |
| R (ms) | 12.766(720 lines) |
| S (ms) | 0.0184(1 lines) |
| SYNC. H/V POLARITY | - / + |
| SEP . SYNC | Y |

2.4 Horizontal scanning

Sync polarity : Positive or Negative
 Scanning frequency : 30 – 83KHz

2.5 Vertical scanning

Sync polarity : Positive or Negative
 Scanning frequency : 56 – 76 Hz

2.6 Power input connection

Power cord length : 1.8 M
 Power cord type : 3 leads power cord with protective earth plug.

2.7 Power management

The monitor must comply with the Microsoft On Now specification, with two power management states, as defined by the VESA DPMS document. The monitor must appropriately display the DPMS state.

| Mode | HSYNC | VSYNC | Video | Pwr-cons. | Indication | Rec. time |
|--------------|-------|-------|---------|-----------|------------|-----------|
| Power-On | On | On | active | < 36 W | Green LED | -- |
| Off | Off | Off | blanked | < 1 W | Amber LED | < 3 s |
| DC Power Off | | | N/A | < 1 W | LED Off | |

2.8 Display identification

In accordance with VESA Display Channel Standard Ver.1.0 and having DDC 2B capability

2.9 USB Hub

NA

3. Visual characteristics

3.1 Test conditions

Unless otherwise specified, this specification is defined under the following conditions.

- (1) Input signal: As defined in 3.3, 1280 x 1024 non-interlaced mode (64 K/60Hz), signal sources must have 75 ohm output impedance.
- (2) Luminance setting: controls to be set to 200 nits with full screen 100 % duty cycle white signal
- (3) Warm up: more than 30 minutes after power on with signal supplied.
- (4) Ambient light: 400 -- 600 lux.
- (5) Ambient temperature: 25 ± 5 °C

3.2 Brightness

>=250 nits (at panel color temperature, at center of the screen, set contrast and brightness at maximum.)

3.3 Image size

Actual display size 337.920 x 270.336mm

3.4 Brightness uniformity

Set contrast at 100% and turn the brightness to get average above 200 nits at centre of the screen. Apply the Fig 1; it should comply with the following formula:

$$\frac{B_min}{B_max} \times 100\% > 75\%$$

Where B_max =Maximum brightness
 B_min = Minimum brightness

3.5 Check Cross talk (S)

Apply Pattern 2. Set contrast and brightness at 100 %. Measure YA. Then output Pattern 3 and measure YB. the cross talk value :

$$\frac{ABS(YA - YB)}{YA} \times 100\% < 2.0 \%$$

3.6 White color adjustment

There are three factory preset white color 9300K, 6500K, sRGB.

Apply full white pattern, with brightness in 100 % position and the contrast control at 50 % position. The 1931 CIE Chromaticity (color triangle) diagram (x,y) coordinate for the screen center should be:

Product spec.

| | | |
|-----------------------------|------------------|------------------|
| 9300K CIE coordinates | x = 0.283 ± 0.02 | y = 0.297 ± 0.02 |
| 6500K/ sRGB CIE coordinates | x = 0.313 ± 0.02 | y = 0.329 ± 0.02 |
| sRGB CIE coordinates | x= 0.313 ± 0.02 | y = 0.329 ± 0.02 |

Production alignment spec.

| | | |
|-----------------------------|-------------------|-------------------|
| 9300K CIE coordinates | x = 0.283 ± 0.005 | y = 0.297 ± 0.005 |
| 6500K/ sRGB CIE coordinates | x = 0.313 ± 0.005 | y = 0.329 ± 0.005 |
| sRGB CIE coordinates | x = 0.313 ± 0.005 | y = 0.329 ± 0.005 |

Quality Inspection spec.

| | | |
|-----------------------------|-------------------|-------------------|
| 9300K CIE coordinates | x = 0.283 ± 0.015 | y = 0.297 ± 0.015 |
| 6500K/ sRGB CIE coordinates | x = 0.313 ± 0.015 | y = 0.329 ± 0.015 |
| sRGB CIE coordinates | x = 0.313 ± 0.015 | y = 0.329 ± 0.015 |

4. Mechanical characteristics

- 4.1 Cosmetic - Philips ID
- 4.2 Mechanical data files - ProE files required
- 4.3 Location of Philips logo - Per Philips make-up sheet
- 4.4 The gap between Panel and front bezel < 0.8 mm

4.5 Location of Control icons - Per Philips Graphic sheet

4.6 Color for resin/paint - Per Philips make-up sheet

4.7 Resins

- RoHS required
- WEEE required.

4.8 If paint is used

- Rohs required
- WEEE require

4.9 Plastic mold tooling

- Tooling to be designed to minimize cosmetic defects induced by molding process (sink, blush, weld lines, gate marks, ejector marks, etc.).
- Painting to cover up cosmetic defects due to molding is strongly discouraged.

4.10 Plastics flammability

- All Plastics to be Flame Retardant UL 94-V0 or Better (if monitor weighs less than 18kg; UL94-V0 is OK).
- All major plastic parts (bezel, back cover) need to be molded from same resin.

4.11 Texture/Glossing of housing

- The texture area and texture no should follow Philips make-up sheet.
- The exterior surfaces shall have a uniform texture.
- Philips must approve the mold texturing.
- Detail document for texture refer to UAN-D249.
- < = 20 gloss units

4.12 Tilt and swivel base

Tilt angle: -5 ° max (forward) and +20 ° min. (backward).

4.13 Label

- Regulatory label / Carton label should follow Philips requirement.
- Detail document refer to Philips Engineering Reference Book.

4.14 Product dimension / Weight

- Unit dimension (incl. pedestal) : W: 380 mm, H: 387 mm, D: 200mm
- Packed unit dimension (WW carton) : W: 449mm, H: 182mm, D: 489mm
- Packed unit dimension (carton) - W: 460mm, H: 189mm, D: 499mm for China, India
- Net weight : 4.7 Kg (Including I/F cable)
- Gross weight : 6.1 Kg (for WWW)
- 6.2 Kg (for PRC)

4.15 Transportation

Transportation standards refer to TYE-M0002.

4.15.1 Transportation packages

Packaging and wrapping shall be sufficient to protect the product against damage or loss during shipment from the supplier to the destination specified in the purchase order. All packaging materials are subject to test and evaluation per TYE-M0002. The cushion material shall be constructed using EPS material.

4.15.2 Transportation Test

The overall test refer to TYE-M0002.

Vibration, drop test should be performed at ambient temperature(20°C to 23°C) and relative humidity (40% to 65%).

A. Transportation test specification for all regions except China/India

- Package test
 1. Random Vibration test
 2. Drop test
 3. Cold Drop test (for design reference)
- Un-package test
 1. Sine vibration (operating)
 2. Half sine shock test (non operation)

B. Transportation test specification for China/India

- Package test
 1. Random Vibration test
 2. Drop test
 3. Cold Drop test (for design reference)
- Un-package test
 1. Sine vibration (operating)
 2. Half sine shock test (non operation)

4.16 Pallet / Container loading

| | | | | |
|---|---------------------|-------------------|--------------------|-------------------|
| Transportation standards refer to TYE-M0002. | <u>Except China</u> | | <u>China/India</u> | |
| | <u>Pallet</u> | <u>Slip sheet</u> | <u>Pallet</u> | <u>Slip sheet</u> |
| • Air shipment - | 32 sets | --- | 28sets | --- |
| • Sea container 20'(pallet/slip sheet) - | 550 | 590 | 528 | 528 |
| • Sea container 40'(pallet/slip sheet) - | 1320 | 1430 | 1056 | 1056 |
| • Sea container 40' High Cube (pallet/slip sheet) - | 1560 | 1560 | 1152 | 1248 |
| • Truck shipment- | | tbc | | |
| • tbc | | | | |
| A. Air shipment | | | | |
| B. Container loading for other regions | | | | |
| C. Truck loading for other regions | | | | |

5. Environmental characteristics

The following sections define the interference and susceptibility condition limits that might occur between external environment and the display device.

5.1 Susceptibility of display to external environment

- Operating
- Temperature : 0 to 35 degree C
 - Humidity : 80% max
 - Altitude : 0-3658m

- Air pressure : 600-1100 mBAR
 - Storage
 - Temperature : -20 to 60 degree C
 - Humidity : 85% max (< 40°C)
 - Altitude : 0-12192m
 - Air pressure : 300-1100 mBAR
- Note: recommend at 5 to 35°C, Humidity less than 60 %

5.2 Display disturbances from external environment

According to IEC 801-2 for ESD disturbances

5.3 Display disturbances to external environment

Refer to Safety requirement

6. Reliability

6.1 Mean Time Between Failures

System MTBF (Excluding the LCD panel and CCFL) : 50,000 hrs

7. Quality assurance requirements

7.1 Acceptance test

According to MIL-STD-105D Control II level

AQL: 0.4 (major) 1.5 (minor)

(Please also refer to annual quality agreement)

Customer acceptance criteria: UAW0377/00

8. Serviceability

The serviceability of this monitor should fulfill the requirements which are prescribed in UAW-0346 and must be checked with the check list UAT-0361.

9. Philips' Flat Panel Monitors Pixel Defect Policy

| BRIGHT DOT DEFECTS | ACCEPTABLE LEVEL |
|---|------------------|
| MODEL | 170S7 |
| 1 lit subpixels | 3 |
| 2 adjacent lit subpixels | 1 |
| 3 adjacent lit subpixels | 0 |
| Distance between two bright dot defects | > 15 mm |
| Total bright dot defects of all types | 3 |

| BLACK DOT DEFECTS | ACCEPTABLE LEVEL |
|---------------------------------------|------------------|
| MODEL | 170S7 |
| 1 dark subpixels | 4 |
| 2 adjacent dark subpixels | 2 |
| 3 adjacent dark subpixels | 0 |
| Distance between two dark dot defects | > 15 mm |
| Total dark dot defects of all types | 4 |

| Total DOT DEFECTS | ACCEPTABLE LEVEL |
|---|------------------|
| MODEL | 170S7 |
| Total bright or dark dot defect of all type | 5 |

Fig 1: Brightness Uniformity

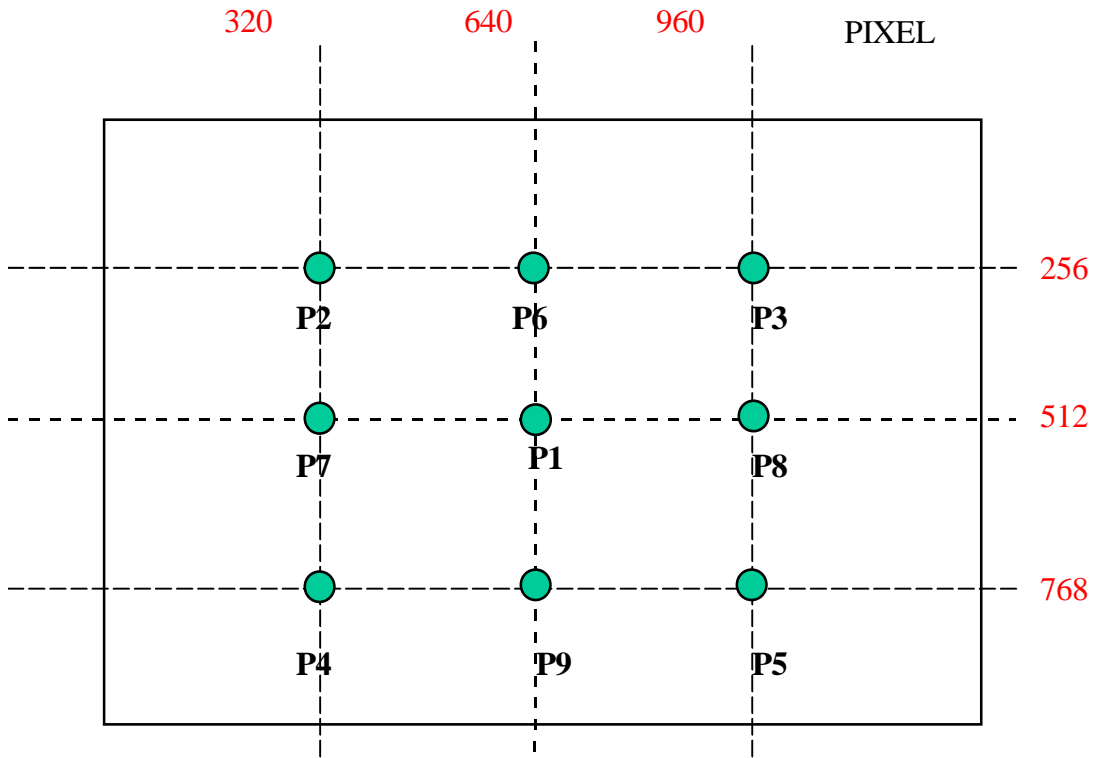


Fig 2: Cross talk pattern
Gray level 46 (64 Gray level)



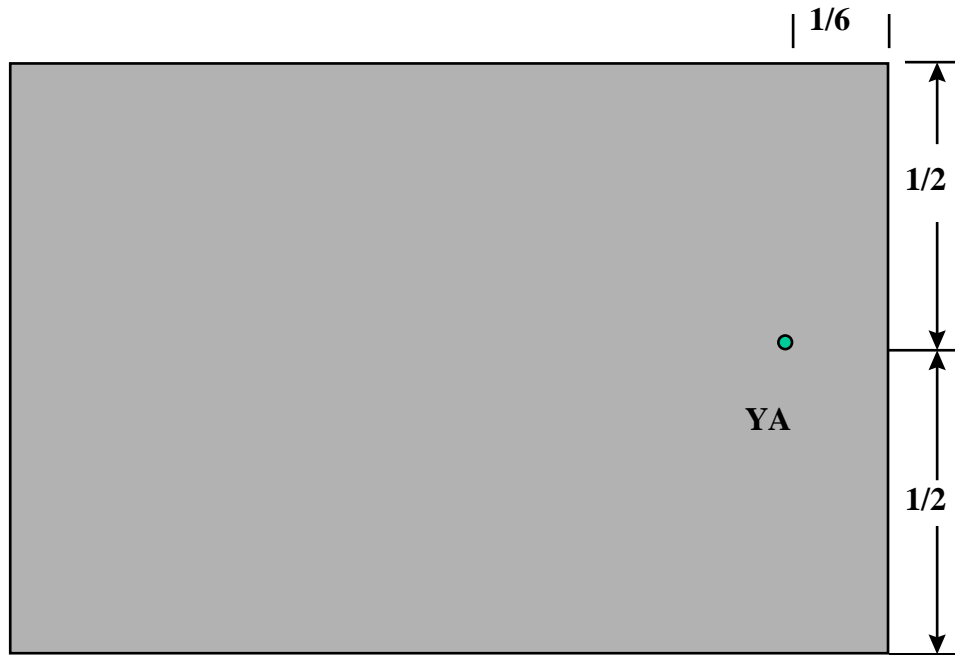




Fig 3: Cross talk Pattern
Center at Gray level 0 (Black)

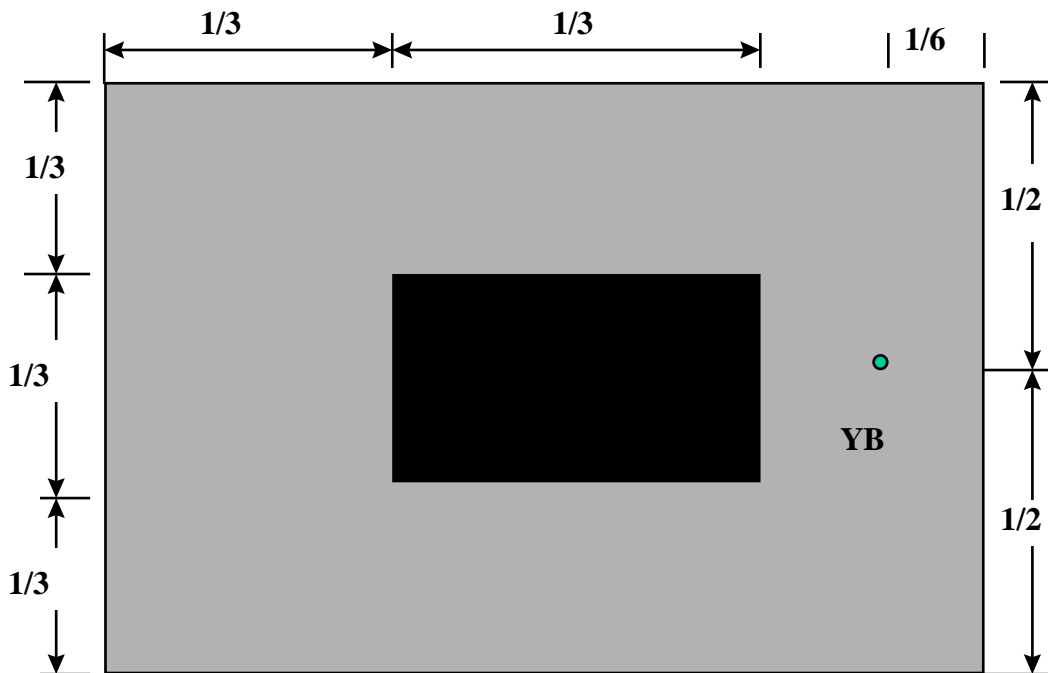


SEPARATE SYNC.

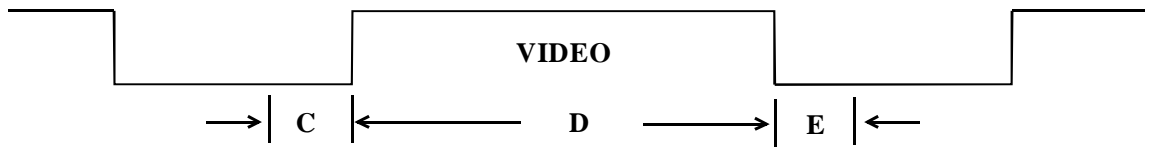


HORIZONTAL

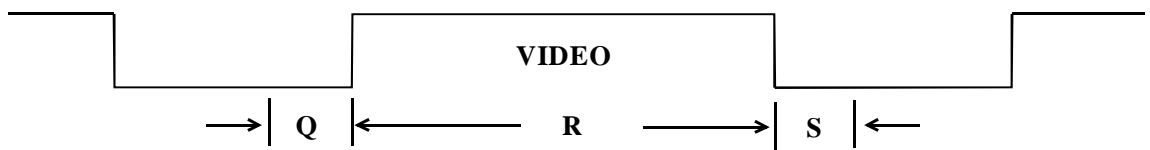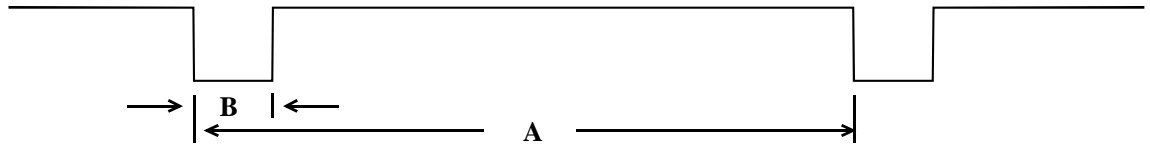

VERTICAL

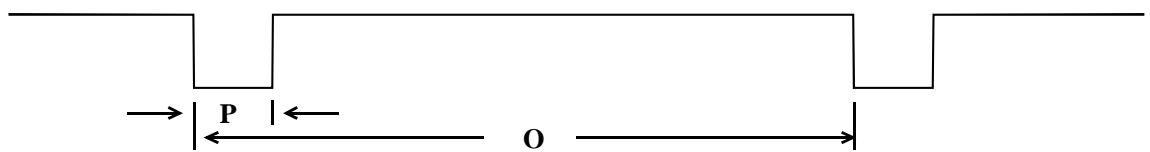

COMPOSITE SYNC.

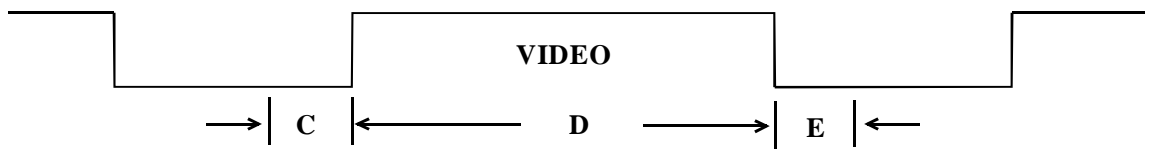

HORIZONTAL



FIG-4 TIMING CHART -1